


REV. 3  
DCO 102710

COIL: @ 25°C	
RESISTANCE	170 OHMS ± 10%
NOMINAL VOLTAGE	18.0 VDC
MUST OPERATE	9.7 VDC
MUST RELEASE	1.15 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.  
OPERATE BOUNCE 5 MS MAX.  
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

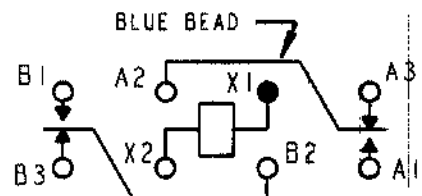

TERMINAL VIEW

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 Hz RESISTIVE
	50,000 OPERATIONS

DR. R.B. 1/9/92 CK. TLG 8-17-01

**CII Technologies**  
advanced control electronic solutions

CUST. NO. M5757/23-041 REV. \_\_\_\_\_  
OPL

"07" RELAY

B07D034BZ2-0357