



ED-21

Analog Output Series Magnetic Encoder

SPECIFICATIONS

- ◆ **Analog voltage or current output**
- ◆ **Low profile**
- ◆ **IP52 sealing**
- ◆ **Ball bearing**

The ED-21 series magnetic encoder is designed to replace traditional mechanical potentiometers.

This product is offered with a ball bearing supported shaft.

Two standard output options are available: 0.5 VDC to 4.5 VDC or 4 mA to 20 mA.

The magnetic technology used in the ED-21 offers advantages over conventional electromechanical potentiometers with sealed electronics, extended temperature ranges, and virtually unlimited life as there are no mechanical parts to wear out.

FEATURES

- ◆ Magnetic sensing technology
- ◆ Encapsulated electronics/sealed
- ◆ Harsh environment compatibility
- ◆ Analog voltage or current outputs
- ◆ Low profile
- ◆ Consistent torque
- ◆ Resistant to contamination
- ◆ Excellent stability
- ◆ Metallic threaded bushing mounting
- ◆ Wide operational temperature range (-40 °C to 85 °C)
- ◆ IP52 sealing

APPLICATIONS

- ◆ Potentiometer replacement
- ◆ Valve position
- ◆ Monitor pump speed and direction
- ◆ Camera position and control
- ◆ XY stage positioning
- ◆ Radio controls
- ◆ Motor feedback
- ◆ Medical diagnostic equipment
- ◆ Video and sound editing equipment
- ◆ Syringe pump
- ◆ Marine, avionics, motor speed and position control
- ◆ Marine steering

PERFORMANCE SPECS (NOTE1)

Analog voltage output:

Parameters	ED-21-BB-0545-V-P
Standard output range 0 - 360°	0.5 VDC to 4.5 VDC
Supply current	15 mA
Operating voltage (Vcc)	5 VDC
Resolution	1.4°
Accuracy	2.8°
Operating temperature	-40 °C to 85 °C

Analog current output:

Parameters	ED-21-BB-0420-I-P
Standard output range 0 - 360°	4.0 mA to 20.0 mA
Supply Current	15 mA + output current loop
Operating voltage (Vcc)	8 VDC to 26 VDC
Resolution	1.4°
Accuracy	2.8°
Operating temperature	-40°C to 85 °C

Bearing:

Parameters	ED-21-BB-XXXX-X-P
Bearings	Ball
Maximum speed	3000 RPM
Bearing life	30,000,000 cycles

(NOTE1): Vcc = 5 V | 12 V, Ambient Temperature 25 °C

MECHANICAL

Parameters	ED-21-BB-XXXX-X-P
Axial load (max.)	20 N
Radial load (max.)	10 N
Shaft end play axial (max.)	0.13 mm
Shaft radial play (max.)	0.25 mm (15.3 mm from thread)
Shaft push-in force	9 N
Shaft pull-out force	1.3 N
Run out (max.)	0.25 mm (19 mm from thread)
Bushing mounting torque	1.1 Nm

DIMENSIONS

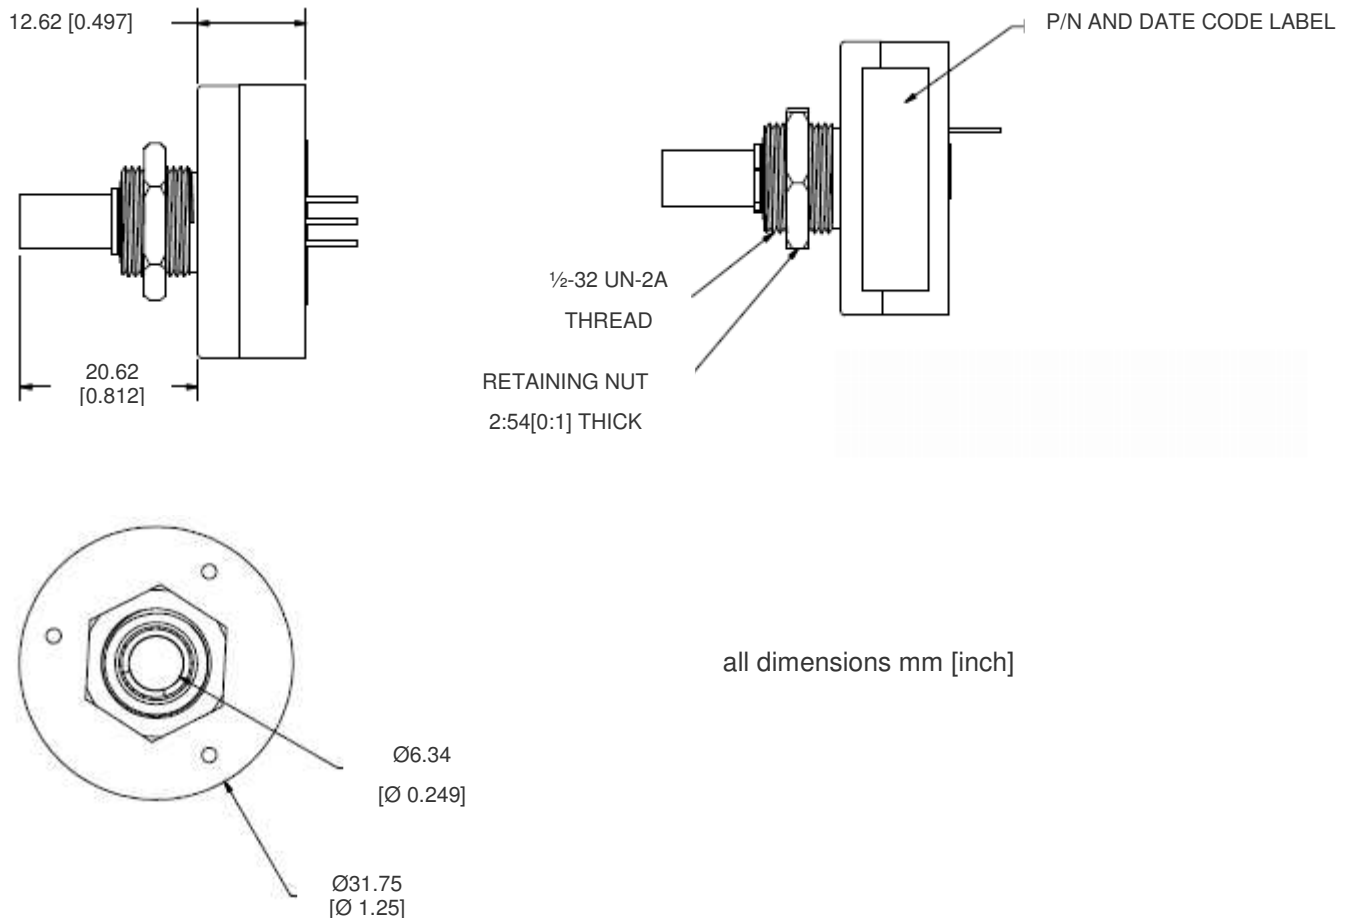


Figure 1: Dimensions of the ED-21

PINNING

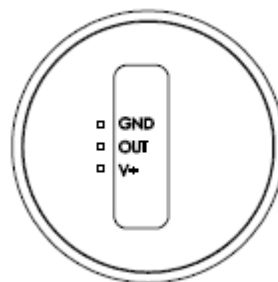


Figure 2: Pinning of the ED-21 (bottom view)

TYPICAL PERFORMANCE CURVES

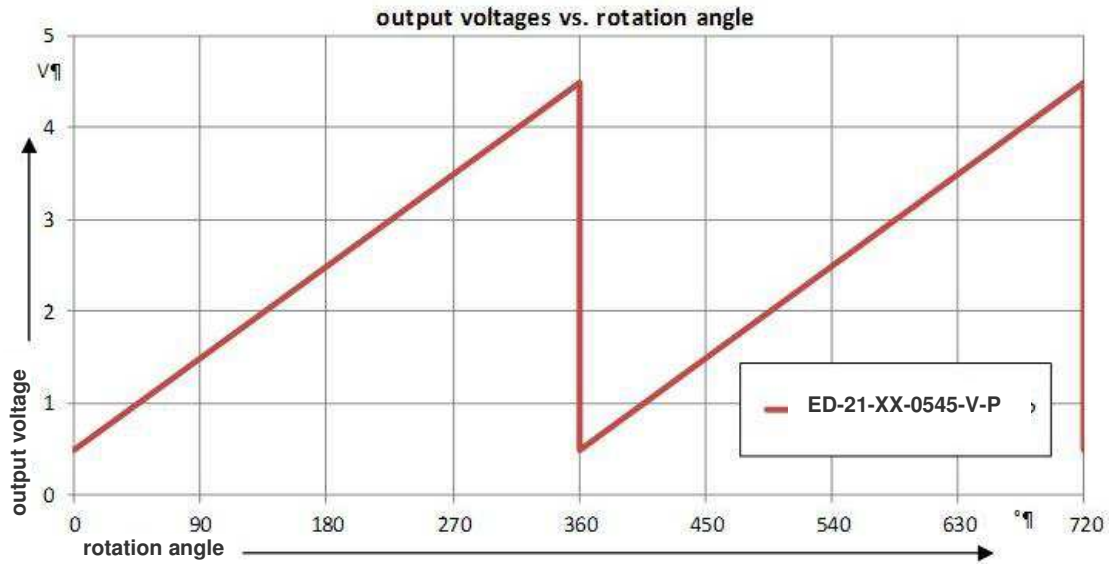


Figure 3: Output voltage vs. rotation angle

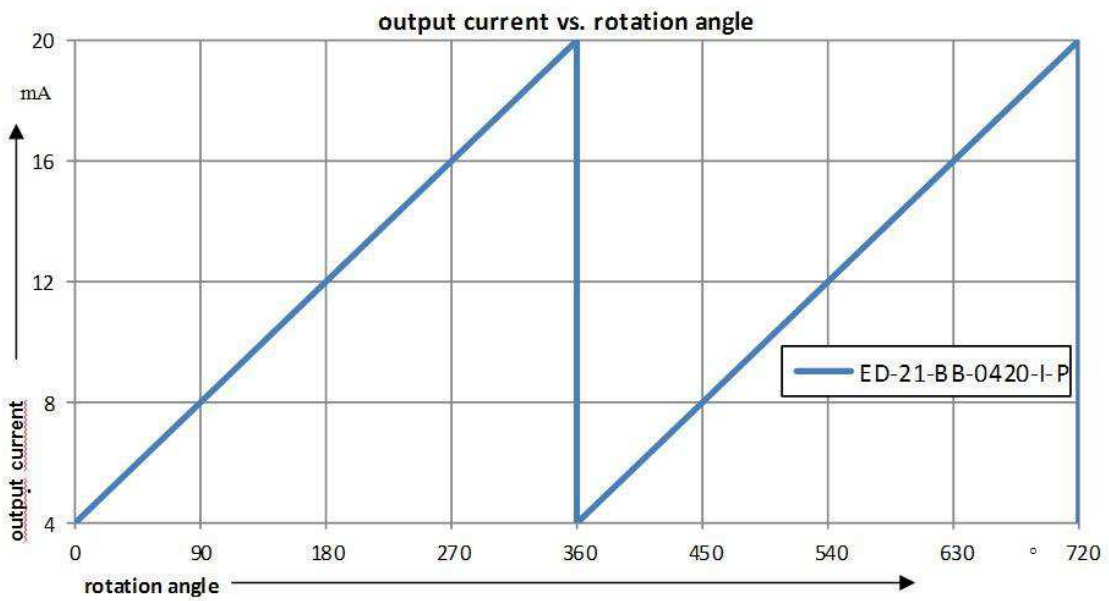


Figure 2: Output current vs. rotational angle


ENVIRONMENTAL

Vibration	MIL-STD-202F Method 204D Test Condition B
Shock	MIL-STD-202F Method 213B Test Condition C
Humidity	MIL-STD-202F Method 103B Test Condition A
Thermal Shock	MIL-STD-202F Method 107G Test Condition A
Operating Temperature	-40 to 85°C
Storage Temperature	-55 to 125°C

ORDERING INFORMATION

PART NUMBERING Model Number - Bearing - Output Range - Analog Output - Connection - Assembly Variant

ED-21-BB-XXXX-X-P

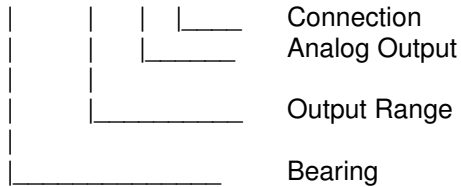

Options:

- P = Pin header
- V = Voltage
- I = Current
- 0545 = 0.5 VDC to 4.5 VDC
- 0420 = 4 mA to 20 mA
- BB = Ball bearing

Example: ED-21-BB-0545-V-P

Model ED-21, ball bearing, analog output voltage from 0.5 VDC to 4.5 VDC, pin header

STANDARD CONFIGURATIONS: ED-21-BB-0545-V-P & ED-21-BB-0420-I-P

Consult factory for other available models.

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Phone +1-800-522-6752
Email: customercare.hmpt@te.com

EUROPE

MEAS Deutschland GmbH(Europe)
a TE Connectivity Company
Phone: +49-800-440-5100
Email: customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Phone: +86-400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

