

RAYCHEM HEAT SHRINK JOINTS (EHVS-H) UP TO 72.5 KV

KEY FEATURES

- High level of mechanical protection against environmental influences
- Moisture sealing
- Suitable for paper and polymeric cable constructions
- Mechanical shear bolt connector
- Handles different insulation layers like XLPE, EPR or paper MIND
- Tested according to IEEE 404 and IEC 60840

TE Connectivity (TE), Raychem Heat Shrink Joint (EHVS-H) is based on a heat shrink design for voltage classes up to 72.5 kV. Polymeric insulated cables of various designs can be adapted with respect to shielding and metal sheath.

Our heat shrink accessories have been used by utilities and industrial companies around the world for more than 35 years. This ongoing field experience has made TE a leader in materials science and technology for high voltage applications. The TE Energy materials technology is at the core of the development of our heat shrink joints. The materials used in our cable accessories have been extensively optimized with respect to product design and function, manufacturing and expected service environments. Furthermore, the system is suitable for paper and polymeric cable constructions and is also designed to accommodate modern jointing requirements such as mechanical shear bolt connectors.

The conductive outer layer together with the insulating middle layer represents the heat-shrinkable hold out for the inner elastomeric layer of the joint body. During the shrinking process the stored recovery force of the elastomeric layer is released and adds up to the recovery force generated by the heat-shrinkable outer layers of the joint body. The resulting high-compression forces as well as the outstanding ability of geometrical adjustment provides tight electrical interfaces and a high-performing seal against moisture ingress.

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.

Raychem Heat Shrink Joints up to 72.5 kV



A heat-shrinkable tube with a strong wall thickness and internally pre-coated with adhesive, provides the outer protection and a lasting moisture sealing.

Grounding kits for commonly used cable constructions like lead sheath, corrugated aluminum sheath, copper tape, wire screens and combinations are available.

TECHNICAL DATA



		52 kV	72.5 kV
Max. operating voltage	U_m (kV)	52	72.5
Standards		IEC 60840 IEEE 404	IEC 60840 IEEE 404
Rated voltage	U_0/U	26/46	36/66
Basic impulse level	(kV)	250	325
Max. continuous operating temperature	(°C)	90	90
Max. conductor emergency temperature	(°C)	250	250
Creepage distance	kA / 1sec	10	10

FOR SHIELD BREAK JOINTS

		52 kV	72.5 kV
DC voltage between metallic sheaths/screens	kV	20	20
DC voltage between metallic sheath/screen and earthed exterior	kV	20	20
Lightning impulse voltage between metallic sheath/screen	kV	60	60
Lightning impulse voltage between metallic sheath/screen and earthed exterior	kV	30	30

APPLICATION RANGE

		52 kV	72.5 kV
Conductor (Al/Cu)	mm ²	2500	2500
Diameter over insulation	mm	30 - 86	30 - 86
Diameter over jacket	mm	100	100

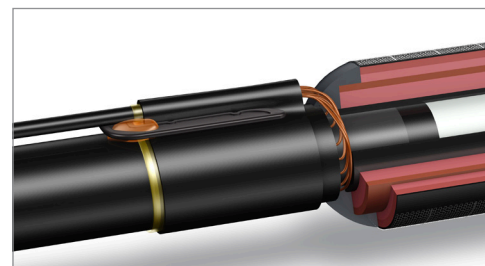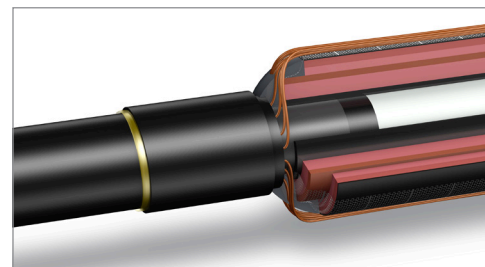

te.com/energy

©2016 TE Connectivity Ltd. family of companies. All Rights Reserved. EPP-2591-DDS-3/16-EHVS-H-TE-Energy-RAYCHEM

TE Connectivity and TE Connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

FOR MORE INFORMATION: TE Technical Support Centers

USA:	+ 1 800 327 6996
France:	+ 33 380 583 200
UK:	+ 44 0870 870 7500
Germany:	+ 49 896 089 903
Spain:	+ 34 916 630 400
Italy:	+ 39 333 250 0915
Benelux:	+ 32 16 351 731
Canada:	+ 1 (905) 475-6222
Mexico:	+ 52 (0) 55-1106-0800
Latin/S. America:	+ 54 (0) 11-4733-2200
China:	+ 86 (0) 400-820-6015