


REV. 1  
DCO 16052

COIL: @ 25° C	
RESISTANCE	675 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.47 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C


NOTES: OPERATE & RELEASE 5 MS MAX.  
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

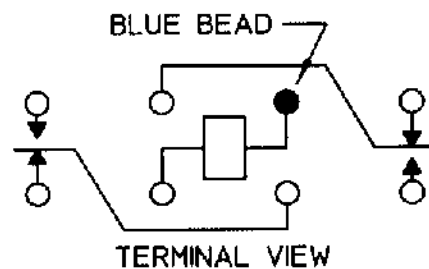

CONTACT RATING: LOW LEVEL TO  
3 AMPS 28 VDC RESISTIVE  
100,000 OPERATIONS

DR. R.B. 3/30/99 CK.G9H 2-7-00

 COMMUNICATIONS  
INSTRUMENTS, INC.

CUST. C. I. I. STD.  
CUST. NO.

TYPE 'FW' RELAY

FW1105G00