

.017 ^{+.002}/_{-.001} DIA.
9 PINS


REV. 1 8/25/98

COIL: @ 25°C
 RESISTANCE 39 OHMS ± 10%
 NOMINAL VOLTAGE 5.0 VDC
 MUST OPERATE 2.9 VDC
 MUST RELEASE 1.4 VDC MAX, 0.23 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.5 MS MAX.
RELEASE TIME 4.0 MS MAX.
CONTACT STABILIZATION 2.0 MS MAX.

CUSTOMER DATA SHEET

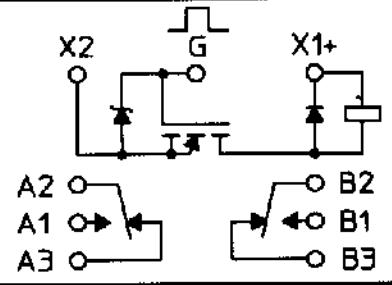

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/8/97 (CK) *ERRY* 1/25/98



CUST. QPL
 CUST. NO. M28776/6-001M

TYPE JMGAT RELAY

JMGAT-5M