

COIL: 26.5 VDC @ 25°C	
WINDING #1	WINDING #2
1000 OHMS ±10% @ 25° C	1000 OHMS ±10% @ 25° C
13.0 VDC MUST OPERATE	13.0 VDC MUST OPERATE
26.5 VDC NOMINAL VOLTAGE	26.5 VDC NOMINAL VOLTAGE

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 30 g's

SHOCK 100 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OTHER SPECIFICATIONS IN ACCORDANCE WITH MIL-R-39016/45

OPERATE TIME 5 MS MAX.

BOUNCE 2.0 MS MAX.

**CUSTOMER DATA SHEET**

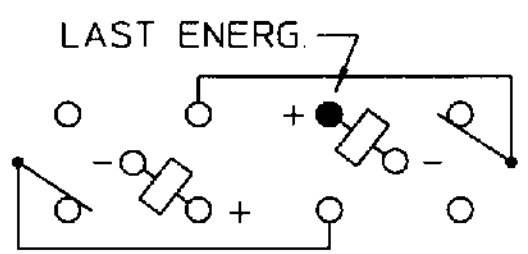

CONTACT RATING: LOW LEVEL TO 2 AMPS  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/30/96 CK. *JAW 5-30-96*



CUST. COMMERCIAL REF.  
 CUST. NO. M39016/45-023M TYPE "LS" RELAY

**LS-9523M**