

## MINI BETACURVE THERMISTOR PROBE (MBD)

### SPECIFICATIONS

- NTC Temperature Sensor
- Fast time response
- Small tip diameter
- Various lead lengths available

NTC thermistor soldered to 30 AWG Solid Silver Plated Copper Wire with PVDF Insulation. Unit is potted in a polyimide tube with thermally conductive black epoxy.

### FEATURES

- Rapid Time Constant  
(400 milliseconds in liquids).
- Standards supplied with  $\pm 0.2^{\circ}\text{C}$  tolerance  
( $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ ).
- Custom tolerances available on request
- Temperature range  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

### APPLICATIONS

- Reduced size allows localized temperature sensing
- Small Medical probes
- Micro-flow sensing

## MINI BETACURVE THERMISTOR PROBE (MBD)

### PERFORMANCE SPECS

Parameters	Units	Value
Resistance @ +25°C	Ohms	100,000
Resistance tolerance from 0°C to +70°C	°C	± 0.2
Alpha Value @ 25°C	%/°C	4.68
Beta Value 25/85	K	4261
Tolerance on Beta Value 25/85	%	± 0.5
Time response in Liquids	milliseconds	400
Dissipation Constant in still air	mW/°C	0.5

### MECHANICAL DETAILS

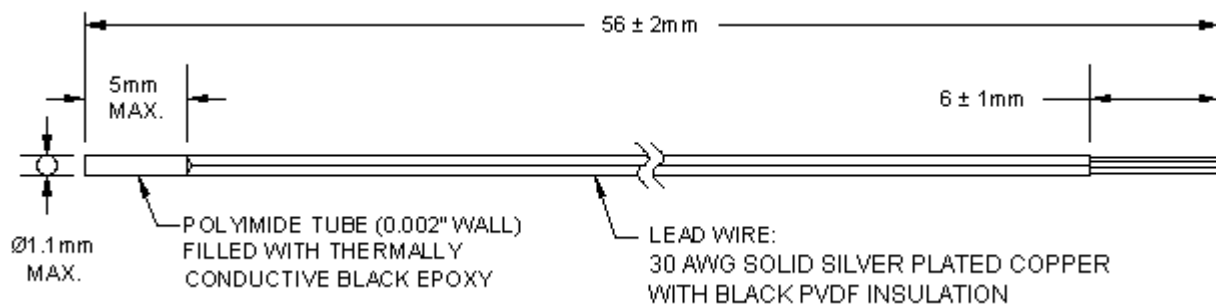


Figure 1: Mini BetaCURVE Thermistor Probe (MBD)

# MINI BETACURVE THERMISTOR PROBE (MBD)

## RESISTANCE V TEMPERATURE TABLE

Temp °C	Ohms
---------	------

Temp °C	Ohms
---------	------

Temp °C	Ohms
---------	------

Temp °C	Ohms
---------	------

-40	4071186
-39	3798837
-38	3546330
-37	3312107
-36	3094743
-35	2892930
-34	2705469
-33	2531260
-32	2369292
-31	2218639
-30	2078448
-29	1947934
-28	1826376
-27	1713112
-26	1607529
-25	1509065
-24	1417202
-23	1331461
-22	1251401
-21	1176615
-20	1106727
-19	1041391
-18	980285
-17	923112
-16	869600
-15	819493
-14	772557
-13	728575
-12	687344
-11	648680
-10	612407
-9	578366
-8	546408
-7	516394
-6	488196
-5	461695
-4	436779
-3	413346
-2	391300
-1	370551
0	351017
1	332620

2	315288
3	298954
4	283555
5	269034
6	255335
7	242408
8	230206
9	218684
10	207801
11	197518
12	187799
13	178610
14	169921
15	161700
16	153921
17	146558
18	139586
19	132983
20	126727
21	120799
22	115179
23	109850
24	104795
25	100000
26	95449
27	91129
28	87027
29	83131
30	79430
31	75913
32	72569
33	69390
34	66367
35	63491
36	60755
37	58150
38	55670
39	53309
40	51060
41	48917
42	46875
43	44929

44	43073
45	41303
46	39615
47	38005
48	36467
49	35000
50	33599
51	32262
52	30984
53	29763
54	28596
55	27481
56	26415
57	25395
58	24420
59	23487
60	22594
61	21740
62	20922
63	20138
64	19388
65	18670
66	17981
67	17322
68	16689
69	16083
70	15502
71	14945
72	14410
73	13897
74	13405
75	12932
76	12478
77	12043
78	11625
79	11223
80	10837
81	10466
82	10109
83	9767
84	9437
85	9121

86	8816
87	8523
88	8241
89	7970
90	7708
91	7457
92	7215
93	6982
94	6758
95	6541
96	6333
97	6132
98	5939
99	5753
100	5573
101	5400
102	5232
103	5071
104	4916
105	4766
106	4621
107	4481
108	4346
109	4216
110	4090
111	3969
112	3852
113	3738
114	3629
115	3523
116	3421
117	3322
118	3227
119	3134
120	3045
121	2959
122	2875
123	2794
124	2716
125	2640

## MINI BETACURVE THERMISTOR PROBE (MBD)

### ORDERING INFORMATION

Part Number	Description	$\Omega$ @25°C	MOQ
100K6MBD1	Mini BetaCurve Thermistor Probe (MBD)	50,000	1000 *

\* For quantities less than Minimum Order Quantity – contact distribution

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1711 139th Lane NW  
Andover, MN 55304  
Tel: +1 763 689 4870  
Fax: +1 763 689 5033  
customercare.ando@te.com

#### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Ballybrit Business Park  
Galway Ireland  
Tel : +353-91-753238  
Fax : +353-91-770789  
Email: customercare.glwy@te.com

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 368 Wulian 1st Road  
Gongxing Town  
Shuangliu, Chengdu  
Sichuan, 610200  
China  
Tel: +86 (0) 28 8573 9088  
Fax: +86 (0) 28 8573 9070  
Email: customercare.chdu@te.com

#### [te.com/sensorsolutions](http://te.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising from the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.



TE Connectivity makes no warranty, express or implied, and disclaims any liability for misuse or damage to property resulting from the use of its products.