

COIL:


RESISTANCE 500 OHMS ± 10%
 NOMINAL VOLTAGE 12.6 VDC
 MUST OPERATE 13.0 mADC
 MUST RELEASE _____

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's
 SHOCK 50 g's 11 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

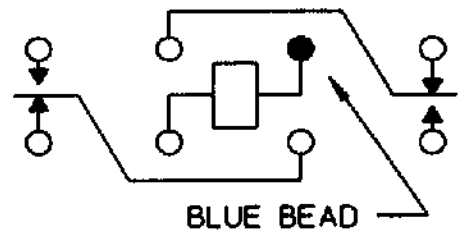

CONTACT RATING: 5A 28 VDC
 RESISTIVE 100,000 OPERATIONS

DR. R.B. 3/6/92 CK. *[Signature]*



CUST. C. I. I. STD.
 CUST. NO. _____

TYPE "SF5A" RELAY

SF5A5101E00