



intercontec
products

723 htec Winkeleinbaudose

speedtec

Code 13

**5+2-polig, Isolierkörper für Stiftkontakte
drehbar, Flansch 28x28**

Sichere Trennung gem. VDE 0140

Berührungsschutz gem. VDE 0623

Schutzleitergehäuseanbindung gem. VDE 0627

TE Teile Nr.: H G C 402 N 00 00 0300 000

IC Ref. Nr.: H 56 C 402 NN 00 00 0300 000

Lieferung in Einzelteilen

Technische Daten

Polzahl	7
Leistung	5 (4+PE)
Signal	2
Temperaturbereich	-20 °C bis 130 °C
Schutzart	gesteckt IP 66/67

Elektrische Daten


Bemessungsstrom	
Bemessungsspannung	
Bemessungsstoßspannung (L-L)	

Leistung

max. 30 A*	
630 V (AC) / 850 V (DC)	
6000 V	

Signal

max. 1,2 A*	
30 V (AC) / 50 V (DC)	
1500 V	

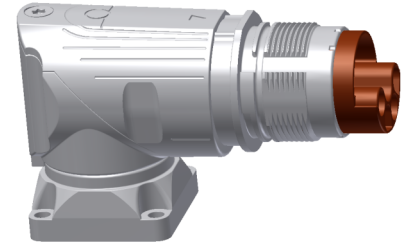

Steckzyklen

500

Werte gem. VDE 0110/EN61984, Abschnitt 6.19.2.2



Verschmutzungsgrad	3
Überspannungskategorie	III
max. Aufstellhöhe	2000 m

Werkstoffe

Gehäuse	Zinkdruckguss, chromatiert
Isolierkörper	PA 6.6 mod., UL 94/ V0
Dichtungen	FKM

Kontakte (nicht im Lieferumfang enthalten)


Werkzeuge (nicht im Lieferumfang enthalten)

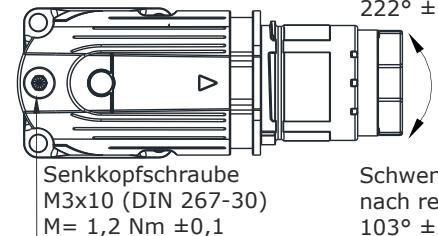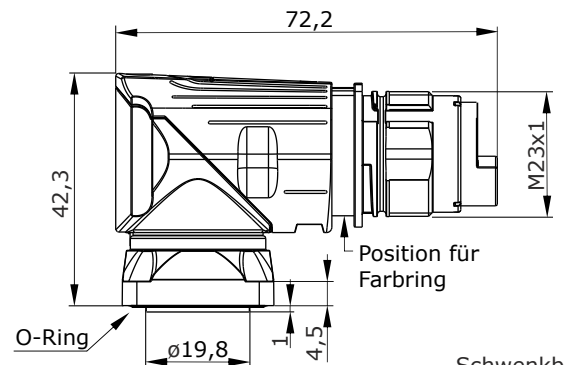


Schwenkbereich
nach links
222° ±3°

Schwenkbereich
nach rechts
103° ±3°

Hauptabmessungen
Winkeleinbaudose, drehbar



Polbild
Ansicht steckseitig

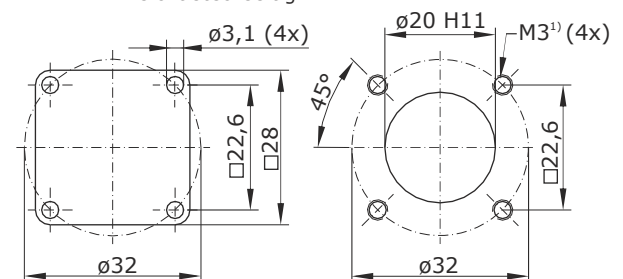

Hauptabmessungen
Flansch

Montagefenster

¹) Alternativ auch Gewinde M2,5 möglich
* Bei max. Anschlussquerschnitt
Anschlussquerschnitt der
verwendeten Kontakte beachten





intercontec
products

723 *htec* Winkeleinbaudose *speedtec*

Code 13

**5+2-polig, Isolierkörper für Stiftkontakte
drehbar, Flansch 28x28**

Sichere Trennung gem. VDE 0140

Berührungsschutz gem. VDE 0623

Schutzleitergehäuseanbindung gem. VDE 0627

**Lieferung
in Einzelteilen**

TE Teile Nr.: H G C 402 N 00 00 0300 000

IC Ref. Nr.: H 56 C 402 NN 00 00 0300 000

Einzelteile

Vorderteil

TE Teile Nr.: 22-0262-031-000

IC Ref. Nr.: 22.262.31



Sockel

TE Teile Nr.: 22-0275-031-000


IC Ref. Nr.: 22.275.31



Isolierkörper

TE Teile Nr.: 40-A756-000-000

IC Ref. Nr.: 40.A756.00



Isolierkörper

TE Teile Nr.: 40-A484-000-000

IC Ref. Nr.: 40.A484.00



Isolierkörper

TE Teile Nr.: 40-A721-000-000


IC Ref. Nr.: 40.A721.00



Senkkopfschraube

TE Teile Nr.: D1-0134-041-000

IC Ref. Nr.: D1.134.41



© 2019 TE Connectivity.

TE Connectivity, TE connectivity (logo), intercontec (logo) und speedtec sind Marken.

Auch wenn TE Connectivity (TE) bemüht ist, die Korrektheit der Informationen in diesem Beitrag sicherzustellen, übernimmt TE keinerlei Gewährleistung dafür, dass diese fehlerfrei, zutreffend, korrekt, verlässlich oder aktuell sind. TE behält sich das Recht vor, die in diesem Beitrag genannten Informationen jederzeit ohne Ankündigung zu ändern. TE weist ausdrücklich jegliche Gewährleistung hinsichtlich der in diesem Beitrag genannten Informationen zurück, einschließlich der implizierten Gewährleistung der Marktgängigkeit oder Eignung für bestimmte Zwecke. Die Maßangaben in diesem Beitrag dienen ausschließlich zu Referenzzwecken und Änderungen sind vorbehalten. Änderungen der Spezifikationen sind vorbehalten. Bitte fragen Sie TE nach den aktuellen Maßangaben und Designspezifikationen

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz



Y6-F367-000-0DE erstellt: 11.12.2019/VVK



intercontec
products

723 htec Receptacle Angled speedtec

Code 13

**5+2-pin, Insulation Insert for Pin-Contacts
rotatable, Flange 28x28**

Protection Against Contact according to VDE 0623

Protective Separation according to VDE 0140

Earth-to-Housing Connection according to VDE 0627

TE part number: H G C 402 N 00 00 0300 000

IC reference number: H 56 C 402 NN 00 00 0300 000

**delivery
single components**

Technical Data

number of pins 7
power 5 (4+PE)
signal 2
temperature range -20 °C to 130 °C
protection type IP 66/67 when connected

Electrical Data

rated current
rated voltage
rated insulation voltage (L-L)

Power

max. 30 A*
630 V (AC) / 850 V (DC)
6000 V

Signal

max. 1.2 A*
30 V (AC) / 50 V (DC)
1500 V

mating cycles 500

Data according to VDE 0110/EN61984, paragraph 6.19.2.2



pollution degree 3
over voltage category III
max. height for operation 2000 m

Material

housing zinc diecast, chromated
insulation insert PA 6.6 mod., UL 94/ V0
seals FKM


Contacts (not part of product contents)

Tools (not part of product contents)

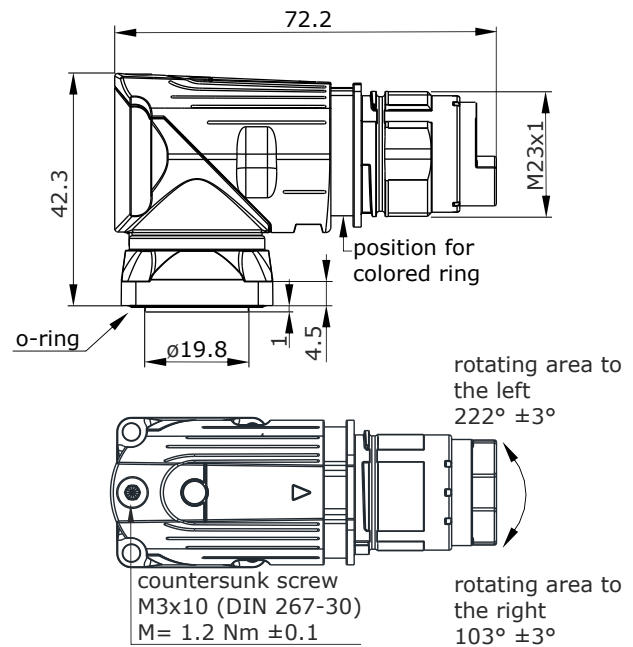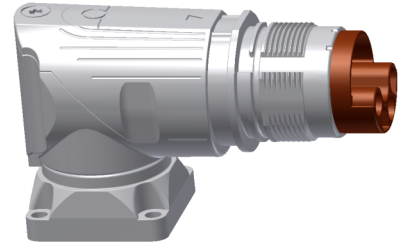


Main Dimensions

receptacle angled, rotatable



Contact Arrangement

mating view

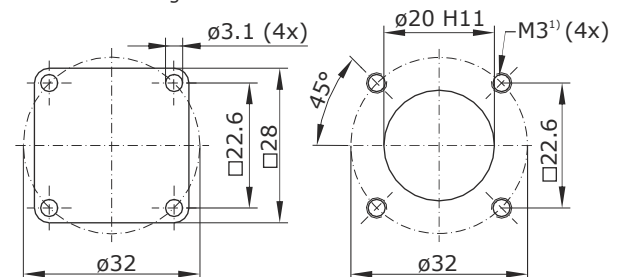

Main Dimensions

flange

Mounting Hole

¹⁾ possible also with thread M2.5
* for max. wire cross-section
pay attention to the
cross-section of used contacts

Y6-F367-000-0EN issued: 06.03.2015/MC; modified: 11.12.2019/VK

© 2019 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz





intercontec
products

723 *htec* Receptacle Angled *speedtec*

Code 13

**5+2-pin, Insulation Insert for Pin-Contacts
rotatable, Flange 28x28**

Protection Against Contact according to VDE 0623

Protective Separation according to VDE 0140

Earth-to-Housing Connection according to VDE 0627

TE part number: H G C 402 N 00 00 0300 000

IC reference number: H 56 C 402 NN 00 00 0300 000

**delivery
single components**

Single Components


front part
TE part no.: 22-0262-031-000
IC ref. no.: 22.262.31



connector base
TE part no.: 22-0275-031-000
IC ref. no.: 22.275.31



insulation insert
TE part no.: 40-A756-000-000
IC ref. no.: 40.A756.00



insulation insert
TE part no.: 40-A484-000-000
IC ref. no.: 40.A484.00



insulation insert
TE part no.: 40-A721-000-000
IC ref. no.: 40.A721.00



countersunk screw
TE part no.: D1-0134-041-000
IC ref. no.: D1.134.41



© 2019 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz



Y6-F367-000-0EN issued: 11.12.2019/VK