



intercontec
products

623 Winkeleinbaudose

speedtec - ready

drehbar, 12-polig

Flansch 28x28

Gehäuse Code 1

Isolierkörper uncodiert
axiale Abdichtung

TE Teile Nr.: A G C 052 N 00 00 1200 000
IC Ref. Nr.: A E D C 052 NN 00 00 1200 000



Technische Daten

Polzahl 12
Temperaturbereich -20 °C bis 130 °C
Schutzart gesteckt IP 66/67

Elektrische Daten

Bemessungsstrom max. 7 A*
Bemessungsspannung 160 V (AC/DC)
Bemessungsstoßspannung (L-L) 2500 V

Steckzyklen 500

Werte nach VDE 0110/EN61984, Abschnitt 6.19.2.2

Verschmutzungsgrad 3
Überspannungskategorie III
max. Aufstellhöhe 2000 m



Werkstoffe

Gehäuse Zinkdruckguss, chromatiert
Isolierkörper PBT, UL 94/V0
Dichtungen FKM

Kontakte (nicht im Lieferumfang enthalten)


Werkzeuge (nicht im Lieferumfang enthalten)

digitale Crimpzange Best.-Nr.: C0.235.00
(analoge Crimpzange Best.-Nr.: C0.101.00)

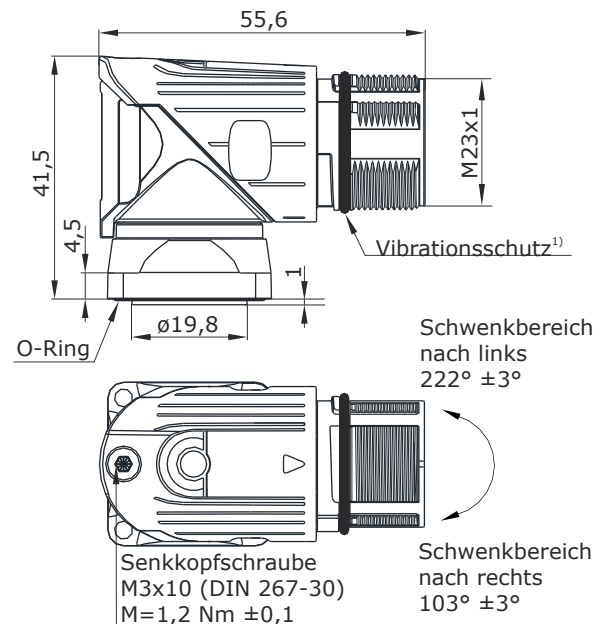


Hauptabmessungen

Winkeleinbaudose, drehbar



Polbild

Ansicht steckseitig

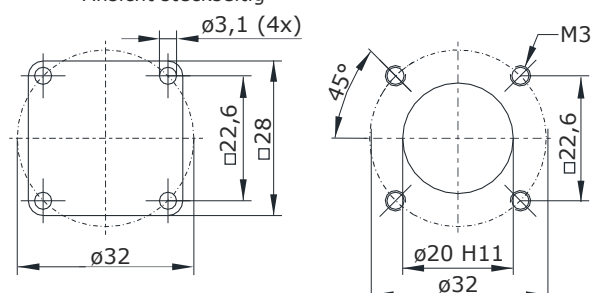

Hauptabmessungen

Flansch

Montagefenster

* Bei max. Anschlussquerschnitt
Anschlussquerschnitt der
verwendeten Kontakte beachten

¹⁾ siehe Infoblatt speedtec





intercontec
products

623 Receptacle Angled

speedtec - ready

rotatable, 12-pin

Flange 28x28

Housing Code 1

Insulation Insert uncoded

Axial Sealing



TE part number: A G C 052 N 00 00 1200 000

IC reference number: A ED C 052 NN 00 00 1200 000

Technical Data

number of pins 12
temperature range -20 °C to 130 °C
protection type IP 66/67 when connected

Electrical Data

rated current max. 7 A*
rated voltage 160 V (AC/DC)
rated insulation voltage (L-L) 2500 V

mating cycles 500

Data according to VDE 0110/EN61984, paragraph 6.19.2.2

pollution degree 3
over voltage category III
max. height for operation 2000 m



Material

housing zinc diecast, chromated
insulation insert PBT, UL 94/ V0
seals FKM

Contacts (not part of product contents)


Tools (not part of product contents)

digital crimping tool order code: C0.235.00
(analog crimping tool order code: C0.101.00)

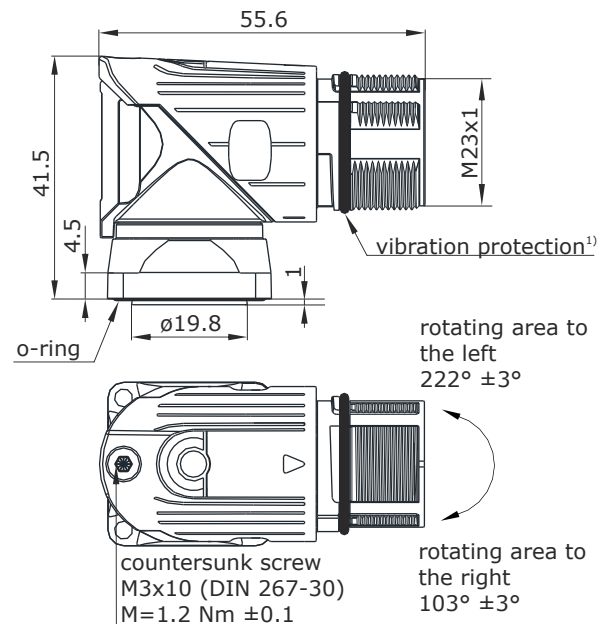


Main Dimensions

receptacle angled, rotatable




Contact Arrangement

mating view



Hauptabmessungen

Flansch



Montagefenster

* for max. wire cross-section
pay attention to the
cross-section of used contacts

¹⁾ see info sheet speedtec

© 2017 TE Connectivity

TE Connectivity, TE connectivity (logo), intercontec (logo) and speedtec are trademarks.

While TE Connectivity (TE) has made every reasonable effort to ensure the accuracy of the information in this presentation, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this article are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE Connectivity Industrial GmbH
Bernrieder Straße 15
94559 Niederwinkling, Germany
+49 9962 2002 - 0
intercontec@te.com
www.intercontec.biz

