



intercontec
products

723 *htec* Einbaudose *speedtec*

Code 13

Flansch 28x28

5+2-polig, Isolierkörper für Stiftkontakte
Schutzleitergehäuseanbindung gem. VDE 0627
Berührungsschutz gem. VDE 0623
Sichere Trennung gem. VDE 0140

TE Teile Nr.: H E C 402 N 00 00 0300 000
IC Ref. Nr.: H 53 C 402 NN 00 00 0300 000

Technische Daten

Polzahl	7
Leistung	5 (4+PE)
Signal	2
Temperaturbereich	-20 °C bis 130 °C
Schutzart	gesteckt IP 66/67

Elektrische Daten

Bemessungsstrom	Leistung 30 A*	Signal max. 1,2 A*
Bemessungsspannung	630 V (AC) / 850 V (DC)	30 V (AC) / 50 V (DC)
Bemessungsstoßspannung (L-L)	6000 V	1500 V

Steckzyklen 500

Werte gem. VDE 0110/EN61984, Abschnitt 6.19.2.2




Verschmutzungsgrad	3
Überspannungskategorie	III
max. Aufstellhöhe	2000 m

Werkstoffe


Gehäuse	Zinkdruckguss, chromatiert
Isolierkörper	PA 6.6 mod., UL 94/ V0
Dichtungen	FKM

Kontakte (nicht im Lieferumfang enthalten)


Werkzeuge (nicht im Lieferumfang enthalten)

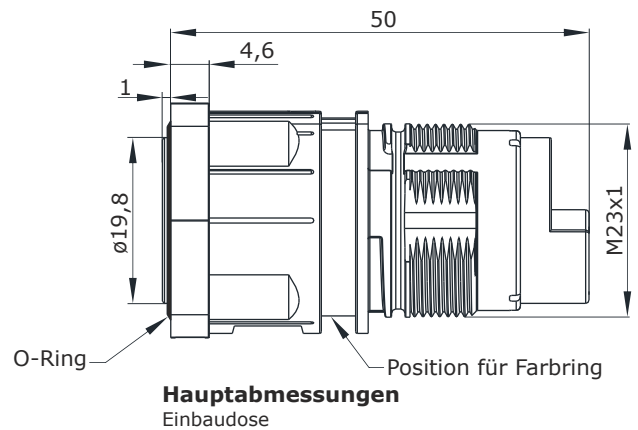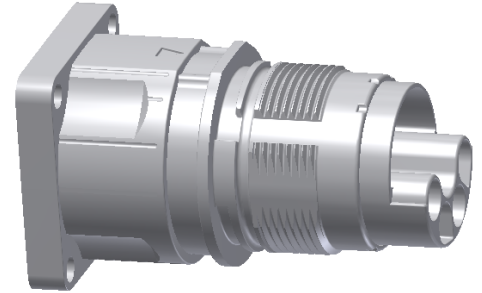

Polbild
Stift, Code 13
Ansicht steckseitig



Hauptabmessungen
Flansch



Montagefenster

* Bei max. Anschlussquerschnitt
Anschlussquerschnitt der
verwendeten Kontakte beachten





intercontec
products

723 htec Receptacle

speedtec

Code 13

Flange 28x28

5+2-pin, Insulation Insert for Pin-Contacts
Earth-to-Housing Connection according to VDE 0627
Protection Against Contact according to VDE 0623
Electrically Protective Separation to VDE 0140

TE part number: H E C 402 N 00 00 0300 000

IC reference number: H 53 C 402 NN 00 00 0300 000

Technical Data

number of pins	7
power	5 (4+PE)
signal	2
temperature range	-20 °C to 130 °C
protection type	IP 66/67 when connected

Electrical Data

rated current	30 A*
rated voltage	630 V (AC) / 850 V (DC)
rated insulation voltage (L-L)	6000 V

Power

rated current	30 A*
rated voltage	630 V (AC) / 850 V (DC)
rated insulation voltage (L-L)	6000 V

Signal

max. 1.2 A*	
30 V (AC) / 50 V (DC)	
1500 V	

mating cycles 500

Data according to VDE 0110/EN61984, Paragraph 6.19.2.2



pollution degree	3
over voltage category	III
max. height for operation	2000 m

Material


housing	zinc diecast, chromated
insulation insert	PA 6.6 mod., UL 94/ V0
seals	FKM

Contacts (not part of product contents)


Tools (not part of product contents)

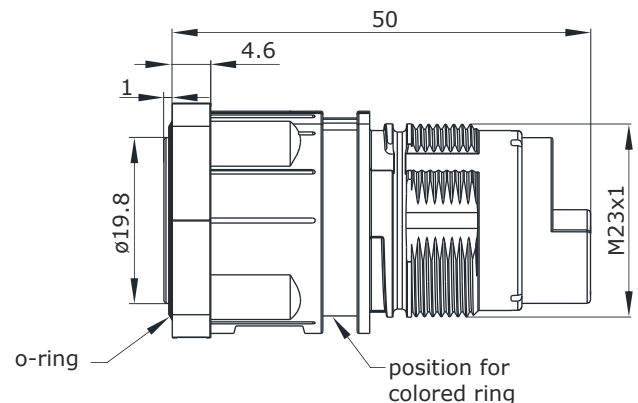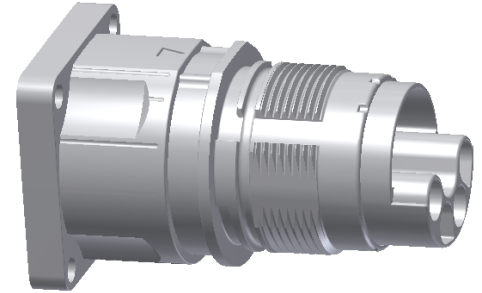


Main Dimensions
receptacle



Contact Arrangement
pin, code 13
mating view



Main Dimensions
flange



Mounting Hole

* for max. wire cross-section
pay attention to the
cross-section of used contacts

