


# ES1000

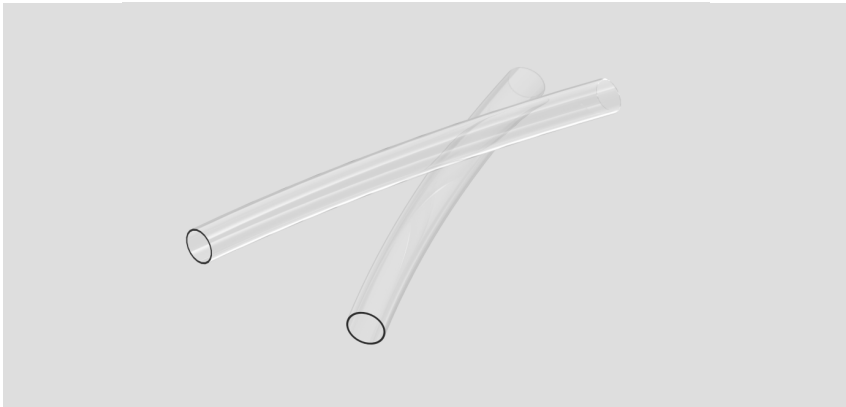

## SEMI RIGID, ADHESIVE-LINED, EASY SPLICE, HEAT SHRINKABLE TUBING

Clear, adhesive-lined ES1000 heat-shrinkable tubing is specifically designed for environmental sealing and electrical insulation of wire splices, terminations, and components where see-through inspection is required.

ES1000 tubing has an outer jacket of radiation-crosslinked, semirigid polyolefin. The jacket is mechanically tough, providing strain relief and abrasion protection of wire splices and mechanically sensitive components. The inner layer of the tubing is a unique hot-melt adhesive, specially formulated to seal to most types of commercial wire insulation, and to perform well at an extended temperature range.

The thick adhesive forms an effective barrier against fluids and moisture, helping to protect the harness from the effects of corrosion and water wicking. Because ES1000 tubing has a high shrink ratio, only a few sizes are needed to cover a wide range of splice and component diameters.

### TEMPERATURE RATING

- Full recovery temperature: **135°C (275°F)**
- Continuous operating temperature: **-40°C to 130°C (-40°F to 266°F)**
- Minimum shrink temperature: **110°C (230°F)**

### SPECIFICATIONS\*

- Type: **ES1000**
- Raychem: **RT-1113**
- UL: **E85381**


### PRODUCT BENEFITS

- Clear product for see through inspection of the splice.
- Non flame retarded.
- Hot melt adhesive to provide excellent sealing properties.
- Excellent mechanical protection against abrasion and strain damage.
- UL224 VW-1 compliant.

### MARKET

- Automotive
- ICT

## DIMENSIONS (MILLIMETERS/INCHES)

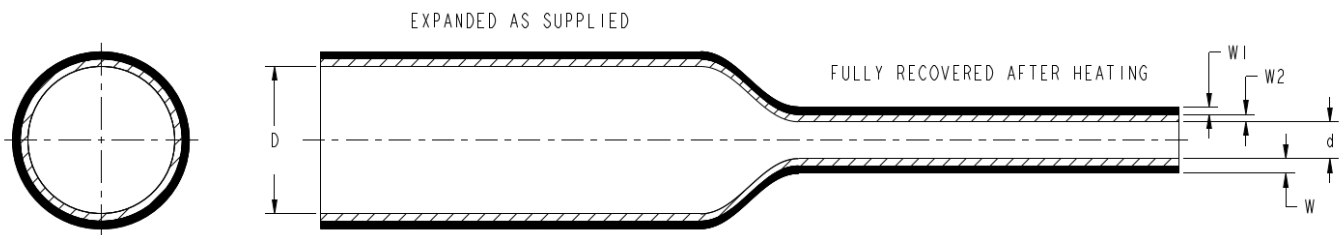

Product Size	Inside Diameter		Recovered wall thickness		
	Expanded as supplied D (min.)	Recovered after heating d (max.)	Minimum total wall W	Minimum jacket wall W1	Minimum Adhesive wall W2
ES1000-No.1	5.72 (0.225)	1.27 (0.050)	1.20 (0.047)	0.64 (0.025)	0.56 (0.022)
ES1000-No.2	7.44 (0.293)	1.65 (0.065)	1.52 (0.060)	0.76 (0.030)	0.76 (0.030)
ES1000-No.3	10.85 (0.427)	2.41 (0.095)	1.91 (0.075)	0.89 (0.035)	1.02 (0.040)
ES1000-No.4	17.78 (0.700)	4.45 (0.175)	2.41 (0.095)	1.04 (0.041)	1.37 (0.054)

Note: Dimensions shown in mm (inches).  
 \*\*Wall thickness will be less if tubing recovery is restricted during shrinkage.

### ORDERING INFORMATION

Color	Clear (-X)
Size selection	Always order the largest size that will shrink snugly over the component being covered.
Standard packaging	Cut piece -MM, Stick -STK (1.2M)
Marking	Tubing will be marked with the number size (for example, ES-1, ES-2, ES-3, or ES-4).
Ordering description	Specify product name, size, print code, color, and finishing type; for example, ES1000-No.2-B9-X-25MM.

Are you looking to seal out moisture, offer enhanced strain relief, or provide rigorous mechanical protection?  
 Do you need a flame retardant product? Leverage TE Connectivity's (TE) comprehensive portfolio of heat shrink tubing products in a wide range of applications.

## Learn more: [TE.com/heatshrinktubing](https://www.te-connectivity.com/heatshrinktubing)

© 2023 TE Connectivity. All Rights Reserved.

TE Connectivity, TE connectivity (logo), TE, EVERY CONNECTION COUNTS and Raychem are trademarks owned or licensed by the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this brochure are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

03/23