

PRELIMINARY  
PRODUCT SPECIFICATION.

1. SCOPE

1.1. Contents

This specification covers the performance and test requirements for the AMP Latch Receptacle interconnection system.

1.2. Connector Assembly Definition

A. Receptacle : Receptacle contacts in housings crimped to .050 inch centerline ribbon cable, conductors AWG 30 solid or AWG 28 stranded. Completed assemblies mated to goldplated .025 square posts on .100 centerlines.

B. Paddle Board: Pin contacts in housings crimped to .050 inch centerline ribbon cable, conductors AWG 30 solid or AWG 28 stranded. Completed assemblies are soldered to printed circuit board.

2. APPLICABLE DOCUMENTS

The following documents form a part of this specification to the extent specified herein. In the event of conflict between the requirements of this specification and the product drawing, the product drawing shall take precedence. In the event of conflict between the requirements of this specification and the referenced documents, this specification shall take precedence.

2.1. I.E.C. Specifications

- I.E.C. 130, Connectors used for frequencies below 3 MHz (Mc/s)
- I.E.C. 68, Basic environmental testing procedures for electronic components and electronic equipment.

\* Trademark of AMP Incorporated

CLASSIFICATION

Unrestricted

This information is confidential and is intended for use only by those persons to whom it is furnished. It is not to be distributed outside the organization without written authorization from AMP-HOLLAND.

MSL

				DATE 29-1-79	<b>AMP</b>	AMP-HOLLAND N.V. HERTOGENBOSCH HOLLAND	REV A	
			DATE 1-2-79	LOC A				NO 108-19033
A	Par. 4.3 changed	RV			NAME CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH			
LTR	REVISION RECORD	DR	CHE	DATE	SHEET 1 OF 11			

FORMULY

AMP SECURITY CLASSIFICATION  
Unrestricted

This information is confidential and is disclosed to you on condition that no further disclosure is made by you to other than AMP personnel without written authorization from AMP-HOLLAND N.V.

2.2. Military and Federal Specifications

- A. MIL-G-45204 : Gold Plating, Electrodeposited
- B. MIL-P-46161 (MR): Molded Plastics, Polyterephthalate Thermoplastic, Glass Fiber Reinforced.
- C. MIL-STD-105 : Sampling Procedures and tables for inspection by attributes.
- D. QQ-B-750 : Phosphor Bronze
- E. QQ-N-290 : Nickel Plating, Electrodeposited.

2.3. Applicable product drawings

3. DESIGN AND CONSTRUCTION

3.1. General


Connector assemblies shall be of the design, construction and physical dimensions as specified on the applicable product drawings.

3.2. Material and finish

- A. Housings : The houses are molded of thermoplastic polyester, flammability rating 94 V0 (SE-0).
- B. Contacts : Connector contacts shall be fabricated of phosphor bronze confirming QQ-B-750. They shall be goldplated with nickel underlayer.

3.3. Application

By this connector system, connections between printed circuit boards and ribbon cable can be made either permanently soldered by means of paddle board connectors or removable by using receptacle connectors mated to male connectors soldered on the p.c. board.

SHEET 2 OF 11	 AMP-HOLLAND N.V. HERTOGENBOSCH HOLLAND		NO 108-19033	REV A
NAME CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH				

4. PERFORMANCE AND TEST DESCRIPTION4.1. Temperature rating

Each assembly shall be capable of continuous operation throughout an ambient temperature range of -65°C to 105°C.

4.2. Current rating

The maximum permissible current shall be 1.0 Amperes per contact.

4.3. Dielectric withstanding voltage

The dielectric withstanding voltage shall be greater than 500 Volts R.M.S.

4.4. Test conditions

Unless specifically stated, tests and examinations required by this specification shall be executed under any combination of conditions as specified in I.E.C. 68-1 clause 5.3.


4.5. Test samples

The samples submitted to tests shall include receptacle connectors crimped on wire and mating male connectors soldered to p.c. board as well as paddle board connectors crimped on wire and soldered to p.c. boards.

4.6. Test GroupsTest\_group\_I

The samples contained in this group shall consist of a minimum of 8 receptacle connectors each of 26 contacts minimum of the following versions mated to male connectors which are soldered to p.c. boards.

- Standard pressure version terminated on AWG 30 cable.
- Standard pressure version terminated on AWG 28 cable.

SHEET				AMP-HOLLAND N.V. HERTOGENBOSCH HOLLAND	
3	OF 11	LOC H	A	NO 108-19033	REV A
NAME CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH					

This information is confidential and is disclosed to you on condition that no further disclosure is made by you to other than AMP personnel without written authorization from AMP-HOLLAND N.V.

AMP SECURITY CLASSIFICATION

Unrestricted

NUMBER 108-19033 Rev. A

Test\_group\_II

The samples of this group shall consist of a minimum of 8 receptacle connectors of 26 contacts minimum of the following version mated to male connectors which are soldered to p.c. boards :

-High pressure version terminated to AWG 28 cable.

Test\_group\_III

The samples of this group shall consist of a minimum of 4 paddle board connectors each of 26 contacts minimum of the following versions soldered to p.c. board.

-Terminated on AWG 30 cable.

-Terminated on AWG 28 cable.

Test\_group\_IV

The samples of this group shall consist of a minimum of 8 paddle connectors of 26 contacts minimum not terminated to cable, not soldered.

Test\_group\_V

The samples of this group shall consist of 4 receptacle connectors of minimum 26 positions crimped on AWG 28 cable, unmated.

Test\_group\_VI


The samples of this group shall consist of 4 paddle board connectors minimum 26 positions, crimped on AWG 28 cable, not soldered to p.c. board,

5. QUALITY ASSURANCE PROVISIONS

5.1. Qualification Inspection

5.1.1. Sample selection.

Connector assemblies and contacts shall be prepared in accordance with applicable Product- and Customer drawings. They shall be selected at random from current production. Number of testsamples in accordance with I.E.C. 130-1 clause 9. :

SHEET				AMP-HOLLAND N.V.	
4 OF 11		LOC	NO	108-19033	
		H	A		
NAME CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH					
					REV A

5.1.2. Test sequence. Qualification inspection shall be verified by testing the samples to the test sequence as specified under 6.2.

5.1.3. Acceptance. When testing the samples as specified, all results will fall within the specification limits 99% of the time with a confidence level of 95%. Failures attributed to equipment, test set-up or operator deficiencies will not disqualify the product. When product failure occurs, corrective action will be taken and samples shall be re-submitted for qualification.

5.1.4. Test Report. A report containing test data-analysis and product performance evaluation shall be issued at the completion of the qualification test program.

5.2. Quality Conformance Inspection

Sampling procedures shall be in accordance with MIL-STD-105. The applicable AMP Quality Inspection Plan will specify the Sampling and Acceptance Quality Level to be used. Dimensional and functional requirements will be in accordance with the applicable Product drawings.

6. TEST SCHEDULE FOR TYPE TEST

6.1. The test schedule, Table I on pages 6-7-8 shows all tests, conditions of tests as well as the requirements to be met.

6.2. The testsequence, Table II on pages 9-10, shows the order in which the tests shall be carried out.

6.3. Test lots, the various test groups shall be divided into the following number of test lots

- Group I and II : 4 lots each, equally divided
- Group III - IV - V and VI : 2 lots each, equally divided.


SHEET 5 OF 11			AMP-HOLLAND N.V.	
			HERTOGENBOSCH HOLLAND	
LOC H	A	NO 108-19033	REV A	
NAME CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH				

TABLE I

Test Description	Clause of I.E.C.130-1	Conditions of test	Requirements
Examination of Product	11-12		Meets requirements of product drawings
Termination Resistance (Low level)	14.1 14.1.3	The E.M.F. of the measuring circuit shall not exceed 20 mV. I = 100 mA max. Measuring points see fig. 1 page 11.	15 milliohm max.
Termination resistance (Rated Current)		All contacts shall be loaded with 1A, measurements shall be taken after temperature stabilisation is reached.	15 milliohm max.
Insulation Resistance	14.4	Measuring Voltage 500 + 15 V	5000 Megohm min. initial 1000 Megohm min. after damp heat
Voltage Proof	14.5	1 minute 500 V	No breakdown or flashover
Damp Heat accelerated	18.2.2	I.E.C. 68-2-4, Test D Hot under mechanical and electrical load, 6 cycles.	
Damp Heat Long Term	18.3	I.E.C. 68-2-3, Test C Severity: 21 days half lot mated, half lot unmated. Not under mech. and electrical load.	
Damp Heat Steady State	18.3	I.E.C. 68-2-3, Test C Severity: 4 days	

108-19033 Rev. A

UNRESTRICTED

CLASSIFICATION

This information is confidential and is disclosed to you on the understanding that you will not disclose it to other than AMP personnel without the written authorization from AMP-HOLLAND N.V.



SHEET				AMP-HOLLAND N.V.	
6 OF 11		LOC	NO	HERTOGENBOSCH HOLLAND	
		H	A	108-19033	
NAME		REV			
CONNECTOR, FLAT CABLE		A			
ROUND CONDUCTOR, AMP LATCH					

TABLE I (continued)

Test description	Clause of I.E.C.130-1	Conditions of test	Requirements
Rapid Change of temperature	18.4	I.E.C. 68-2-14; Test Na, -65°C/+105°C; 6 cycles ½ hour/½ hour. Not under mechanical and electrical load	
Industrial Gas (Sulphur dioxide)	18.7	I.E.C. 68-2-42 Test Kc 10 days, mated condition 25 P.P.M. SO <sub>2</sub>	
Salt Mist	18.7	I.E.C. 68-2-11, Test Ka 1 x 48 hrs (5% NaCl) mated condition	
Insertion/Extraction Force	16.1	Measuring force to insert and extract male contacts in female connector assemblies.	2,20 N max/contact stand.pressure 3,40 N max/contact high pressure 0,30 N min/contact stand.pressure 0,40 N min/contact high pressure
Mechanical Endurance	19	Number of operations:150 Frequency of operations: 150/hr	
Vibration	16.4	I.E.C. 68-2-6, Test Fc Procedure B4; 10-55 Hz Displacement 0,75 mm peak 100 mA current applied.	No discontinuity above 1 microsec. no physical damage.
Physical Shock		I.E.C. 68-2-27, Test Ea 100 g, 11 milleseconds pulse duration, halve sine wave form.	No discontinuity above 1 microsec. no physical damage.

NUMBER 108-19033 Rev. A  
 Unrestricted  
 AMP SECURITY CLASSIFICATION  
 no further declassification from  
 This information is confidential and is disclosed to you on condition that you will not disclose it to other than AMP personnel without written permission from AMP-HOLLAND N.V.

SHEET				AMP-HOLLAND N.V. HERTOGENBOSCH HOLLAND	
7	OF 11	LOC	A	NO	108-19033
NAME		CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH			
		REV		A	

This information is confidential and is disclosed to you on condition that no further disclosure is made by you to other than AMP personnel without written authorization from AMP-HOLLAND N.V.

TABLE I (continued)

Test description	Clause of I.E.C.130-1	Conditions of test	Requirements
Solderability	15.3	I.E.C.68-2-20 Test T Solder bath method.	5% max. dewetting of functional area
Resistance to Soldering Heat	15.3	I.E.C.68-2-20 Test Tb Method 1A	No functional damaging


SHEET			AMP-HOLLAND N.V.	
			1-HERTOGENBOSCH HOLLAND	
8 OF 11	LOC H	A	NO 108-19033	REV A
NAME CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH				



TABLE II

NUMBER 108-19033 Rev. A

Unrestricted

AMP SECURITY CLASSIFICATION

no further declassification from

This information is confidential and is disclosed to you on condition you secure it from you to other than AMP personnel without written AMP-HOLLAND N.V.

Test or examination	Group	I - II				III		IV		V-VI	
	Lot	1	2	3	4	5	6	7	8	9	10
Examination of product		x	x	x	x	x	x	x	x	x	x
Termination Resistance (Low Level)		x	x	x	x	x	x				
Termination Resistance (Rated current)		x	x			x					
Insulation Resistance										x	x
Voltage Proof										x	x
Insertion-Withdrawal force		x	x								
Damp Heat Long Term (21 days)					x		x				x
Rapid change of temperature				x		x				x	
Mechanical Endurance		x	x								
Insertion-Withdrawal force		x	x								
Termination Resistance (Low Level)		x	x	x	x	x	x				
Insulation resistance										x	x
Voltage Proof										x	x
Salt Mist		x									
Industrial Gas			x								
Termination Resistance (Low Level)		x	x								
Vibration				x		x					
Physical Shock				x		x					
Termination Resistance (Low Level)				x		x					
Damp heat accelerated				x		x				x	
Termination resistance (Low Level)				x		x					
Insulation resistance										x	



SHEET			AMP-HOLLAND N.V.		REV
			HERTOGENBOSCH HOLLAND		
9 OF 11	LOC	A	NO	108-19033	A
NAME CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH					

Table II

Test or examination	Group	I - II				III		IV		V-VI	
	Lot	1	2	3	4	5	6	7	8	9	10
Voltage Proof										x	
Damp Heat steady state 4 days								x			
Solderability								x			
Resistance to soldering heat									x		
Examination of product		x	x	x	x	x	x	x	x	x	x

NUMBER 108-19033 Rev. A  
 Unrestricted  
 AMP SECURITY CLASSIFICATION

This information is confidential and is disclosed to you on condition that no further disclosure is made by you to other than AMP personnel without written authorization from AMP-HOLLAND N.V.

SHEET 10 OF 11	 AMP-HOLLAND N.V. HERTOGENBOSCH HOLLAND		NO 108-19033	REV A
				LOC H
NAME CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH				

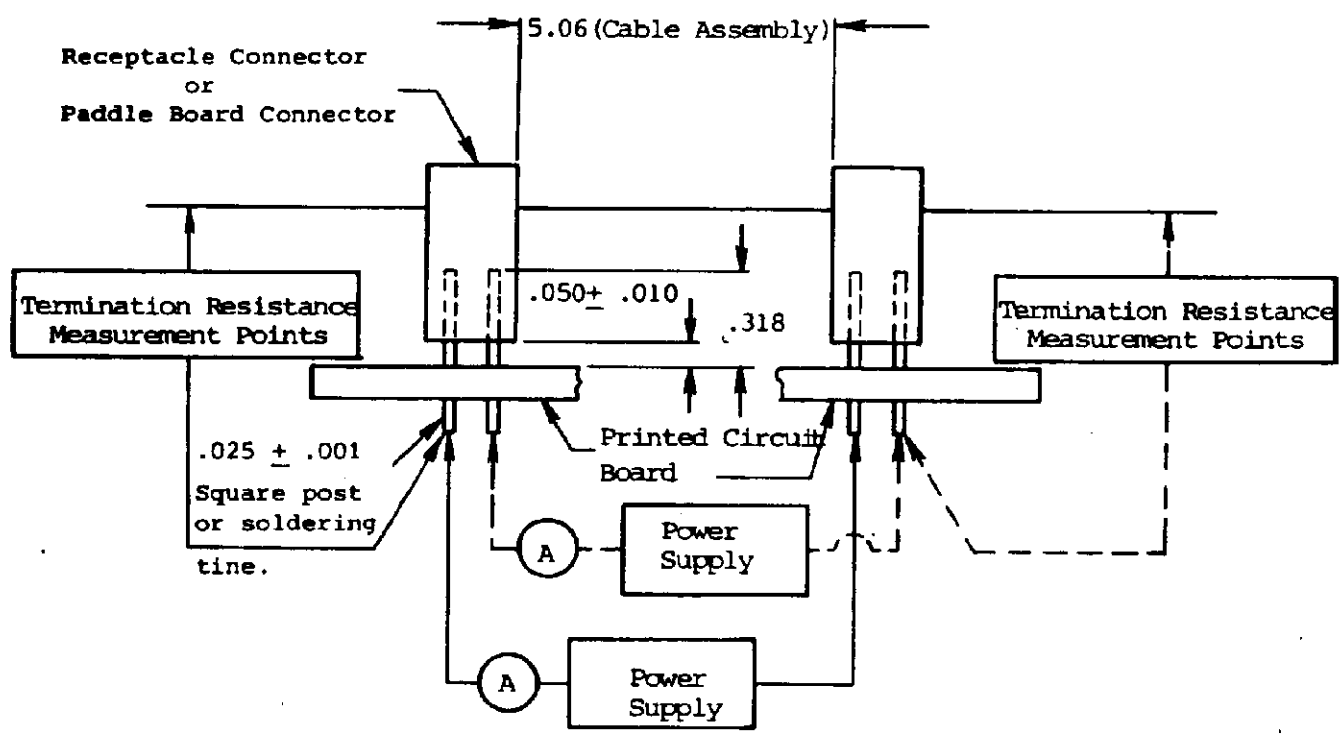


Figure 1.

Termination Resistance Measurement Points

SHEET	<b>AMP</b>		AMP-HOLLAND N.V.	
	HERTOGENBOSCH		HOLLAND	
11 OF 11	LOC H	A	NO 108-19033	REV A
NAME CONNECTOR, FLAT CABLE ROUND CONDUCTOR, AMP LATCH				