

PRODUCT SPECIFICATION
108-51052-1
SERIAL ATA (SATA) CONNECTOR

1.0 SCOPE

This specification covers the requirements for product performance, test methods and quality assurance provisions of Serial ATA (SATA) Connector Set consisting of matching Plugs and Receptacles.

2.0 APPLICABLE DOCUMENTS

The following documents form a part of this specification to the extent specified herein. In the event of conflict between the requirements of this specification and the product drawing, the product drawing shall take precedence. In the event of conflict between the requirements of this specification and the referenced documents, this specification shall take precedence.


2.1 AMP Specifications

- A. 109-5000 Test Specification, General Requirements for Test Methods
- B. 501-51064 Qualification Test Report

2.2 Commercial Standards and specifications

- A. EIA Electronic Industries Association

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU OTHER THAN TO TYCO ELECTRONICS' PERSONNEL WITHOUT WRITTEN AUTHORISATION FROM TYCO ELECTRONICS.

	SPEC: SERIAL ATA (SATA) CONNECTOR		108 – 51052-1
	REV: D	PRE: Leaw Sau Kun	SPEC No:
	EC No: D20070329214659_188706	APP: Leong See Fan	PAGE: 1 of 9

3.0 REQUIREMENTS

3.1 Design and Construction

Product shall be of the design, construction and physical dimensions specified on the applicable product drawing.

3.2 Materials

A. Contact

Material: Receptacle Contact - Copper Alloy
Plug Contact – Brass

Finish : Receptacle - 0.38 μ m min Gold on mating area and 2.54 μ m min Matte Tin on solder area, over 1.27 μ m min Nickel on entire contact

Plug - 0.38 μ m min Gold on mating area and 1.91 μ m min Tin on solder area, over 1.27 ~ 2.54 μ m Nickel on entire contact

B. Housing

Material: High Temperature Thermoplastics, Glass Filled
Flame Class Rating: UL 94V-0

3.3 Ratings

A. Contact

Voltage: 30VDC

Current: 1.5A max per contact

Temperature: -40°C to 85°C (inclusive of temperature rise)

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU OTHER THAN TO TYCO ELECTRONICS' PERSONNEL WITHOUT WRITTEN AUTHORISATION FROM TYCO ELECTRONICS.

tyco / *Electronics*

SPEC No:

108 – 51052-1

REV:

D

PAGE:

2 of 9

3.4 Performance Requirements and Test Descriptions

The product is designed to meet the electrical, mechanical and environmental performance requirements specified in Figure 1.

3.4.1 Test Environment

All tests shall be performed in the environmental conditions listed below, unless otherwise specified.

Temperature: 15°C to 35°C
Humidity: 20% to 80% RH
Atmospheric Pressure: 650 to 800mm Hg

3.4.2 Test Specimens

The test specimens used for tests shall be conforming to the applicable product drawing(s).

Unless otherwise specified, no sample shall be re-used.

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU OTHER THAN TO TYCO ELECTRONICS' PERSONNEL WITHOUT WRITTEN AUTHORISATION FROM TYCO ELECTRONICS.

tyco / *Electronics*

SPEC No:
108 – 51052-1

REV:
D

PAGE:
3 of 9

3.5 Test Requirements and Procedures Summary

Para	Test Items	Requirements	Procedures
3.5.1	Examination of Product	Meets requirements of product drawing.	Visually, dimensionally and functionally inspected per applicable inspection plan and EIA 364-18.
Electrical Requirements			
3.5.2	Insulation Resistance	1000 M Ω min.	Subject a voltage of 500 V DC for 1 minute between adjacent contacts of mated and unmated connector assemblies per EIA 364-21.
3.5.3	Dielectric Withstanding Voltage	No breakdown or flashover.	Subject a voltage of 500 V AC for 1 minute at sea level between adjacent contacts of mated and unmated connector assemblies per EIA 364-20 Method B.
3.5.4	Low Level Contact Resistance	30 m Ω max initial. 15 m Ω max change from initial.	Subject a voltage of 20 mV max open circuit at a current of 100 mA max on mated connector assemblies per EIA 364-23.
3.5.5	Current Rating (apply only to 15 positions)	Temperature rise at thermal equilibrium shall not exceed 30°C above ambient at any point when current is applied (ambient condition is 25°C at still air).	Wire contact P1, P2, P8 & P9 in parallel for power. Wire contact P4, P5, P6, P10 & P12 in parallel for return. Apply 6 A total DC current to parallel contacts P1, P2, P8 & P9 and return from parallel contact P4, P5, P6, P10 & P12.
3.5.6	Solderability	Solderable area shall have a solder coverage of 95% min.	Test solderable portion of contact per AMP 109-11-11. Solder Temp: 245 \pm 2 ⁰ C Immersion Duration: 5s Max

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU OTHER THAN TO TYCO ELECTRONICS' PERSONNEL WITHOUT WRITTEN AUTHORISATION FROM TYCO ELECTRONICS.

tyco / Electronics

SPEC No:

108 – 51052-1

REV:

D

PAGE:

4 of 9

3.5.7	Soldering Heat Resistivity	See note (a).	<p>Reflow Soldering: Test connector per EIA 364-56B, Procedure 6, Test Level 4. Peak Temp: 260+10⁰C/-0⁰C Duration at peak: 30 to 35s</p> <p>Manual soldering: Temp: 350±10⁰C Duration: 3+1/-0s 2 Passes Max</p>
Mechanical Requirements			
3.5.8	Mating Force	Backplane Connector: 20 N max.	Backplane Connector: Mate connector assemblies at a rate of 12.5 mm per minute max per EIA 364-13.
3.5.9	Unmating Force	Backplane Connector: 4 N min after 500 cycles.	Backplane Connector: Unmate connector assemblies at a rate of 12.5 mm per minute max per EIA 364-13.
3.5.10	Durability	See note (a).	Mate and unmate connector assemblies at a rate of 200 cycles/hour max for 50 cycles (internal cabled application) or 500 cycles (backplane/blindmate application) per EIA 364-09.
3.5.11	Vibration (Random)	Discontinuity < 1 µs.	Subject mated connector assemblies to 5.35 g's RMS, 30 minutes in 3 perpendicular planes per EIA 364-28, Condition V, Letter A.
3.5.12	Physical Shock	See note (a). Discontinuity < 1 µs.	Subject mated connector assemblies to 30 g's, ½ sine wave shock (11 milliseconds) in 3 perpendicular planes (total 18 shocks) per EIA 364-27, Condition H.

Environmental Requirements			
3.5.13	Humidity	See note (a).	Subject mated connector assemblies to 96 hours at 40 °C with 90~95% relative humidity per EIA 364-31, Method II, Condition A.
3.5.14	Temperature Life	See note (a).	Subject mated connector assemblies to 85 °C for 500 hours per EIA 364-17, Method A, Condition III.
3.5.15	Thermal Shock	See note (a).	Subject mated connector assemblies to 10 cycles between -55 °C and 85 °C per EIA 364-32, Condition I.
3.5.16	Salt Spray	See note (a).	Subject mated connectors to 5% salt concentration for 24 hours per AMP spec 109-5101.
3.5.17	Industrial Gas (SO ₂)	See note (a).	SO ₂ Gas: 25ppm, 96%RH, 25 ⁰ C for 24 hours per AMP Spec 109-5107.

Note:

(a) Shall meet visual requirements, show no physical damage, and shall meet requirements of additional tests as specified in the Test Sequence in Figure 2.

Figure 1

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU OTHER THAN TO TYCO ELECTRONICS' PERSONNEL WITHOUT WRITTEN AUTHORISATION FROM TYCO ELECTRONICS.

tyco / <i>Electronics</i>	SPEC No: 108 – 51052-1	REV: D	PAGE: 6 of 9
----------------------------------	---------------------------	-----------	-----------------

3.6 Product Qualification Test Sequence

Test Item	Test Group							
	1	2	3	4	5	6	7	8
	Test Sequence (a)							
Examination of Product	1,5	1,9	1,8	1,8	1,5	1,5	1,4	1,3
Low Level Contact Resistance	2,4	3,7	2,4,6		2,4	2,4	3	
Insulation resistance				2,6				
Dielectric Withstanding Voltage				3,7				
Current Rating			7					
Solderability								2
Soldering Heat Resistivity							2	
Mating Force		2						
Unmating force		8						
Durability	3	4(b)						
Vibration (Random)		5						
Physical Shock		6						
Reseating (manually plug/unplug 3 time)			5					
Humidity				5				
Temperature Life			3					
Thermal Shock				4				
Salt Spray					3			
Industrial Gas (SO ₂)						3		

Note:

- (a) Numbers indicate sequence in which the tests are performed.
- (b) Preconditioning, 20 cycles for the 50-durability cycle requirement, 50 cycles for the 500-durability cycle requirement. The mating and unmating cycle is at the maximum rate of 200 cycles per hour.

Figure 2

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU OTHER THAN TO TYCO ELECTRONICS' PERSONNEL WITHOUT WRITTEN AUTHORISATION FROM TYCO ELECTRONICS.

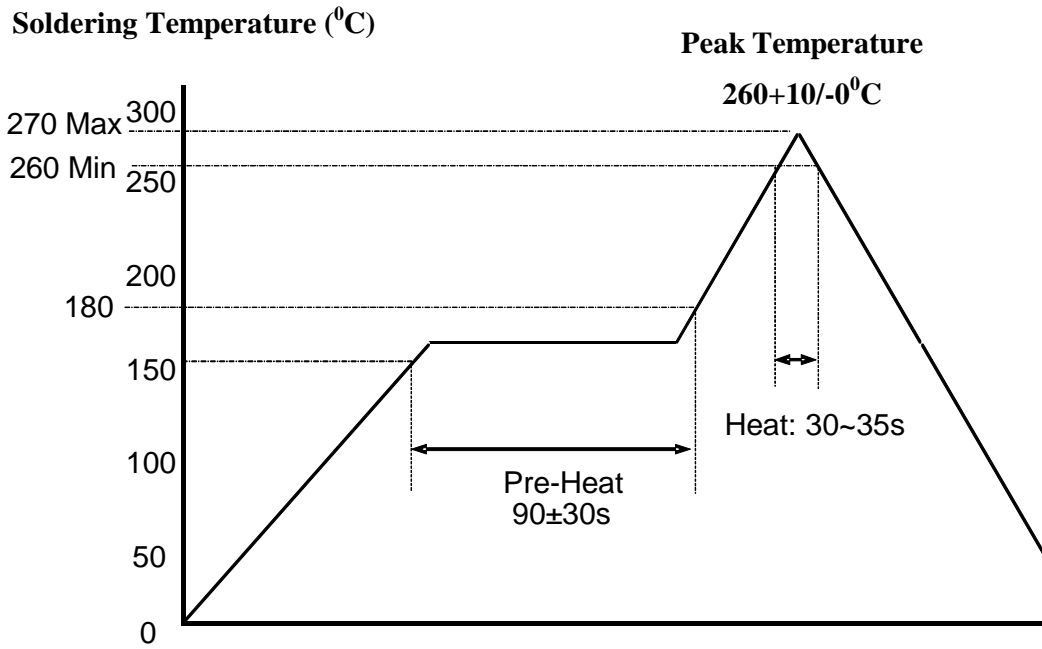


Figure 3
Temperature Profile for Reflow-Soldering

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU OTHER THAN TO TYCO ELECTRONICS' PERSONNEL WITHOUT WRITTEN AUTHORISATION FROM TYCO ELECTRONICS.

4.0. QUALITY ASSURANCE PROVISIONS

4.1 Qualification Testing

A. Sample Selection

Samples shall be selected at random from current production. The number of test points will correspond to the number of positions on the connector.

B. Test Sequence

Qualification inspection shall be verified by testing samples as specified in Figure 1 and 2.

C. Test sequence shall be serialised for tractability.

4.2 Re-Qualification Testing

If changes significantly affecting form, fit or function are made to the product or manufacturing process, product quality assurance shall coordinate re-qualification testing, consisting of all or part of the original testing sequence as determined by development/ product, quality and reliability engineers.

4.3 Acceptance

Acceptance is based upon verification that product meets requirements of Figure 1 and 2. Failures attributed to equipment, test set-up or operator deficiencies shall not disqualify product. When product failure occurs, corrective action shall be taken and samples re-submitted for qualification. Testing to confirm corrective action is required before re-submittal.

4.4 Quality Conformance Inspection

Applicable Tyco quality inspection plan will specify sampling acceptable quality level to be used. Dimensional and functional requirements shall be accordance with applicable product drawing and specification.

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU OTHER THAN TO TYCO ELECTRONICS' PERSONNEL WITHOUT WRITTEN AUTHORISATION FROM TYCO ELECTRONICS.

tyco / *Electronics*

SPEC No:

108 – 51052-1

REV:

D

PAGE:

9 of 9