




A-MP* TWIN COAXICON* CONTACT & CABLE SELECTION CHART

GP-1904

RELEASED	3-25-66
REVISED	1-8-68

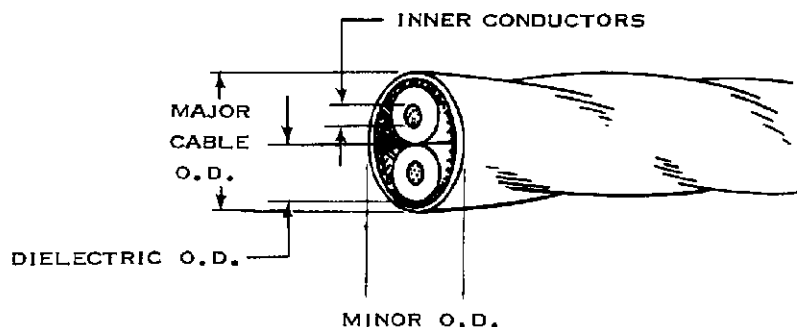

STEP I		STEP II				STEP III				STEP IV		FOLLOW STEPS I THRU IV TO DETERMINE THE USE OF ITEMS BELOW												
DIELECTRIC O. D.	INNER CONDUCTORS				MAJOR CABLE O. D.		OUTER SHIELD																	
	STANDARD GOLD (.000030)		HEAVY GOLD (.000100)		WITH SUP.		NO SUP.				FERRULE NO. & COLOR	MALE & FEMALE CONTACT	CONTACT INSULATOR COLOR	ALIGNMENT † BUSHING NO. & COLOR	TOOL									
	32-26 AWG .018 MAX. SOLID	26-22 AWG .029 MAX. SOLID	22-20 AWG .0375 MAX. SOLID	20-19 AWG .039 MAX. SOLID	32-26 AWG .018 MAX. SOLID	26-22 AWG .029 MAX. SOLID	22-20 AWG .0375 MAX. SOLID	20-19 AWG .039 MAX. SOLID	32-26 AWG .018 MAX. SOLID	26-22 AWG .029 MAX. SOLID					22-20 AWG .0375 MAX. SOLID	20-19 AWG .039 MAX. SOLID	CRIMPING TOOL NO.	CRIMPING DIE NO.	NOM. BRAID CRIMP O. D.	NOM. INS. CRIMP O. D.				
.082 MAX.	32-26 AWG .018 MAX. SOLID	26-22 AWG .029 MAX. SOLID	22-20 AWG .0375 MAX. SOLID	20-19 AWG .039 MAX. SOLID	32-26 AWG .018 MAX. SOLID	26-22 AWG .029 MAX. SOLID	22-20 AWG .0375 MAX. SOLID	20-19 AWG .039 MAX. SOLID	32-26 AWG .018 MAX. SOLID	26-22 AWG .029 MAX. SOLID	22-20 AWG .0375 MAX. SOLID	20-19 AWG .039 MAX. SOLID	SINGLE BRAID	FOIL W/GROUND WIRE										
X	X						X		X				X	X	329056 RED W/ BLACK STRIPE	329054 329055	RED	330576-YELLOW	45707-4	69494-1	.254	.151		
X	X						X		X	X	X		X	X	329041 NATURAL	329054 329055	RED	329053-NATURAL	45707-2	69231-2	.254	.224		
X		X					X		X	X	X		X	X	329041 NATURAL	329009 329010	NATURAL	329053-NATURAL	45707-2	69231-2	.254	.224		
X		X					X		X	X	X		X	X	329056 RED W/ BLACK STRIPE	329009 329010	NATURAL	330576-YELLOW	45707-4	69494-1	.254	.151		
X			X				X		X	X	X		X	X	329041 NATURAL	2-329009-1 2-329010-1	YELLOW	329053-NATURAL	45707-2	69231-2	.254	.224		
X			X				X		X	X	X		X	X	329056 RED W/ BLACK STRIPE	2-329009-1 2-329010-1	YELLOW	330576-YELLOW	45707-4	69494-1	.254	.151		
X				X			X		X	X	X		X	X	329056 RED W/ BLACK STRIPE	2-329054-2 2-329055-2	BLUE	330576-YELLOW	45707-4	69494-1	.254	.151		
X				X			X		X	X	X		X	X	329041 NATURAL	2-329054-2 2-329055-2	BLUE	329053-NATURAL	45707-2	69231-2	.254	.224		

† ALIGNMENT BUSHINGS ARE NOT REQUIRED WHEN RETENTION CLIP NO. 330617 IS USED.
ALIGNMENT BUSHINGS ARE USED ONLY WITH RETENTION SPRING NO. 329042.