



QUALIFICATION TEST REPORT

**CONNECTOR, AMPOWER*, WAVE CRIMP
PLUG & RECEPTACLE, DRAWER**

501-221

Rev O

COPYRIGHT 1981, 1993
BY AMP INCORPORATED
ALL RIGHTS RESERVED.

Product Specification: 108-1436 Rev. O
CTL No.: CTL9983-063
Date: June 10, 1993
Classification: Unrestricted
Prepared By: Terrance M. Shingara

***Trademark**

CONTROLLED DOCUMENT
This report is a controlled document
per AMP Specification 102-21. It is subject to
change and Corporate Standards should
be contacted for the latest revision.

Corporate Test Laboratory Harrisburg, Pennsylvania

Table of Contents

	<u>Page</u>
1. Introduction	1
1.1 Purpose	1
1.2 Scope	1
1.3 Conclusion	1
1.4 Product Description	2
1.5 Test Samples	2
1.6 Qualification Test Sequence	2
2. Summary of Testing	3
2.1 Examination of Product	3
2.2 Termination Resistance, Dry Circuit	3
2.3 Dielectric Withstanding Voltage	3
2.4 Insulation Resistance	3
2.5 Temperature Rise vs Current	3
2.6 Vibration	3
2.7 Physical Shock	4
2.8 Mating Force	4
2.9 Unmating Force	4
2.10 Contact Retention, plug, power	4
2.11 Contact Retention, plug, signal	4
2.12 Contact Retention, receptacle, power	4
2.13 Contact Retention, receptacle, signal	4
2.14 Crimp Tensile, plug	4
2.15 Crimp Tensile, receptacle	4
2.16 Durability	5
2.17 Housing Lock Strength	5
2.18 Thermal Shock	5
2.19 Humidity-Temperature Cycling	5
2.20 Mixed Flowing Gas	5
2.21 Temperature Life	5
3. Test Methods	5
3.1 Examination of Product	5
3.2 Termination Resistance, Dry Circuit	5
3.3 Dielectric Withstanding Voltage	6
3.4 Insulation Resistance	6
3.5 Temperature Rise vs Current	7
3.6 Vibration	7
3.7 Physical Shock	7
3.8 Mating Force	7
3.9 Unmating Force	7
3.10 Contact Retention, plug, power	7

3.11	Contact Retention, plug, signal	8
3.12	Contact Retention, receptacle, power	8
3.13	Contact Retention, receptacle, signal	8
3.14	Crimp Tensile, plug	8
3.15	Crimp Tensile, receptacle	8
3.16	Durability	8
3.17	Housing Lock Strength	8
3.18	Thermal Shock	8
3.19	Humidity-Temperature Cycling	9
3.20	Mixed Flowing Gas	9
3.21	Temperature Life	9
4.	Validation	10

(R9983TSc)



AMP INCORPORATED

HARRISBURG, PENNSYLVANIA 17105 PHONE: 717-564-0100 TWX: 510-657-4110
CORPORATE TEST LABORATORY

Qualification Test Report AMPOWER Wave Crimp Plug & Receptacle Drawer Connector

1. Introduction

1.1 Purpose

Testing was performed on AMP's AMPOWER Wave Crimp Plug & Receptacle Drawer Connector to determine its conformance to the requirements of AMP Product Specification 108-1436 Rev. 0.

1.2 Scope

This report covers the electrical, mechanical, and environmental performance of the Wave Crimp Plug & Receptacle Drawer Connector manufactured by the Strategic Products Center, Phoenix Az. The testing was performed between October 12, 1992 and June 1, 1993.

1.3 Conclusion

The Wave Crimp Plug & Receptacle Drawer Connector meets the electrical, mechanical, and environmental performance requirements of AMP Product Specification 108-1436 Rev. 0.

1.4 Product Description

The AMPOWER Wave Crimp Drawer connector consists of 2 self-aligning mating halves, a plug and a receptacle. Both halves are equipped with 4 pairs of power contacts. Each pair of power contacts terminates 1 insulated flat cable having 1 or 2 copper conductors in a 1 inch wide envelope. Both .010 and .020 thick conductors are available. In addition to the power channels, the connectors also provide 8 signal channels for sense and control functions.

1.5 Test Samples

The test samples were randomly selected from normal current production lots, and the following part numbers were used for test:

<u>Test Group</u>	<u>Quantity</u>	<u>Part Nbr</u>	<u>Description</u>
1,2,4,5	24	1-765210-1	Cable, Flat .010
1,2,3,4,5	32	1-765210-2	Cable, Flat .020
1,2,3	24	765241-1	Plug Housing
1,2,3	48	765242-1	Strain Relief
1,2,3	24	765243	Plug Sense module
1,2,3	24	765224	Receptacle housing
1,2,3	24	765239	Receptacle sense module
1,2,3,4,5	144	765245	Trans Assy Plug
1,2,3,4,5	144	765209	Trans Assy Receptacle
1,2,3	48	765251	Strain Relief

1.6 Qualification Test Sequence

<u>Test or Examination</u>	<u>Test Group</u>				
	<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>
<u>Examination of Product</u>	1,13	1,9	1,9	1,3	1,3
<u>Termination Resistance, Dry Circuit</u>	3,7	2,7			
<u>Dielectric Withstanding Voltage</u>			3,7		
<u>Insulation Resistance</u>			2,6		
<u>T-Rise vs Current</u>		3,8			
<u>Vibration</u>	5	6			
<u>Physical Shock</u>	6				
<u>Mating Force</u>	2				
<u>Unmating Force</u>	8				
<u>Contact retention, plug, power</u>	9				
<u>Contact retention, plug, signal</u>	10				
<u>Contact retention, receptacle, power</u>	11				
<u>Contact retention, receptacle, signal</u>	12				
<u>Crimp tensile, plug</u>				2	
<u>Crimp tensile, receptacle</u>					2
<u>Durability</u>	4				
<u>Housing lock strength, latching mount</u>			8		
<u>Thermal Shock</u>			4		
<u>Humidity-Temperature Cycling</u>			5		
<u>Mixed Flowing Gas</u>		4			
<u>Temperature Life</u>		5			

The numbers indicate sequence in which tests were performed.

2. Summary of Testing

2.1 Examination of Product - All Groups

All samples submitted for testing were selected from normal current production lots. They were inspected and accepted by the Product Assurance Department of the Strategic product Center, Phoenix Az.

2.2 Termination Resistance, Dry Circuit - Groups 1, 2

All termination resistance measurements, taken at 100 milliamperes DC and 50 millivolts open circuit voltage were less than 2.0 milliohms for power contacts and 18.0 milliohms for signal contacts.

Test Group	Nbr of Samples	Condition	Min	Max	Mean
1	60	Initial (power)	0.35	0.69	0.490
	30	Initial (signal)	7.84	8.98	8.271
	60	After Mechanical	0.34	0.75	0.480
	30	After Mechanical	8.20	10.86	8.826
2	32	Initial (power)	0.33	0.60	0.475
	32	After Verification	0.35	0.58	0.497

All values in milliohms

2.3 Dielectric Withstanding Voltage - Group 3

No dielectric breakdown or flashover occurred when a test voltage was applied between adjacent contacts.

2.4 Insulation Resistance - Group 3

All insulation resistance measurements were greater than 1,000 megohms initially and 1,000 megohms after test.

2.5 Temperature Rise vs Current - Group 2

All power contacts on 20 mil cable had a temperature rise of less than 30°C above ambient when a specified current of 40 amperes DC was applied. All power contacts on 10 mil cable had a temperature rise of less than 30°C above ambient when a specified current of 32 amperes DC was applied.

2.6 Vibration - Groups 1,2

No discontinuities of the contacts were detected during vibration.(group 1 only). Following vibration, no cracks, breaks, or loose parts on the connector assemblies were visible.

2.7 Physical Shock - Group 1

No discontinuities of the contacts were detected during physical shock. Following physical shock testing, no cracks, breaks, or loose parts on the connector assemblies were visible.

2.8 Mating Force - Group 1

All mating force measurements were less than 25 pounds.

2.9 Unmating Force - Group 1

All unmating force measurements were greater than 5.0 pounds.

2.10 Contact Retention, plug, power - Group 1

No physical damage occurred to either the contacts or the housing, and no contacts dislodged from the housings as a result of applying an axial load of 45 pounds to the each full width cable.

2.11 Contact Retention, plug, signal - Group 1

No physical damage occurred to either the contacts or the housing, and no contacts dislodged from the housings as a result of applying an axial load of 3 pounds to the each full individual wire.

2.12 Contact Retention, receptacle, power - Group 1

No physical damage occurred to either the contacts or the housing, and no contacts dislodged from the housings as a result of applying an axial load of 45 pounds to the each full width cable.

2.13 Contact Retention, receptacle, signal - Group 1

No physical damage occurred to either the contacts or the housing, and no contacts dislodged from the housings as a result of supplying an axial load of 3 pounds to the each full individual wire.

2.14 Crimp Tensile, plug - Group 4

All tensile values were greater than 30 pounds for 10 mil half wide cable and greater than 40 pounds for 20 mil half wide cable.

2.15 Crimp Tensile, receptacle - Group 5

All tensile values were greater than 30 pounds for 10 mil half wide cable and greater than 40 pounds for 20 mil half wide cable.

2.16 Durability - Group 1

No physical damage occurred to the samples as a result of mating and unmating the connector halves 100 times.

2.17 Housing Lock Strength, latching mount - Group 3

Mated connectors did not unmate with a 60 pound axial load applied.

2.18 Thermal Shock - Group 3

No evidence of physical damage to either the contacts or the connector was visible as a result of thermal shock.

2.19 Humidity-Temperature Cycling - Group 3

No evidence of physical damage to either the contacts or the connector was visible as a result of exposure to humidity-temperature cycling.

2.20 Mixed Flowing Gas - Group 2

No evidence of physical damage to either the contacts or the connector was visible as a result of exposure to the pollutants of mixed flowing gas.

2.21 Temperature Life - Group 2

No evidence of physical damage to either the contacts or the connector was visible as a result of exposure to an elevated temperature.

3. Test Methods

3.1 Examination of Product

Product drawings and inspection plans were used to examine the samples. They were examined visually and functionally.

3.2 Termination Resistance, Low Level

Termination resistance measurements at low level current were made using a four terminal measuring technique (Figure 1). The test current was maintained at 100 milliamperes DC with an open circuit voltage of 50 millivolts DC.

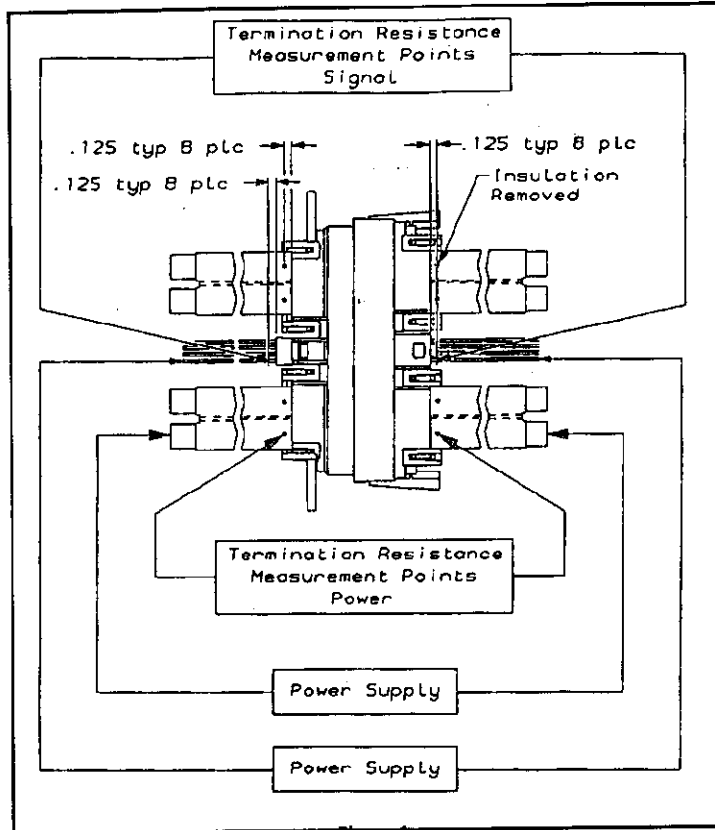


Figure 1
Typical Termination Resistance Measurement Points

3.3 Dielectric Withstanding Voltage

A test potential of 1500 vac was applied between the adjacent power contacts. This potential was applied for one minute and then returned to zero. A test potential of 1200 vac was applied between the adjacent signal contacts. This potential was applied for one minute and then returned to zero.

3.4 Insulation Resistance

Insulation resistance was measured between adjacent power contacts, adjacent signal contacts, and between all contacts and the shell, using a test voltage of 500 volts DC. This voltage was applied for two minutes before the resistance was measured.

3.5 Temperature Rise vs Specified Current

Connector temperature was measured, while energized at the specified current of 40 amperes for 20 mil cable, 32 amperes for 10 mil cable. Thermocouples were attached to the connectors to measure their temperatures. This temperature was then subtracted from the ambient temperature to find the temperature rise. When three readings at five minute intervals were the same, the readings were recorded.

3.6 Vibration, Sine

Mated connectors were subjected to sinusoidal vibration, having a simple harmonic motion with an amplitude of 0.06 inch, double amplitude. The vibration frequency was varied logarithmically between the limits of 10 and 500 Hz and returned to 10 Hz in 15 minutes. This cycle was performed 12 times in each of three mutually perpendicular planes, for a total vibration time of 9 hours. Group 1 connectors were monitored for discontinuities greater than one microsecond, using a current of 100 milliamperes in the monitoring circuit. Group 2 connectors were energized with a current capable of producing an approximate temperature rise of 20° above ambient.

3.7 Physical Shock

Mated connectors were subjected to a physical shock test, having a half-sine waveform of 50 gravity units (g peak) and a duration of 11 milliseconds. Three shocks in each direction were applied along the three mutually perpendicular planes, for a total of 18 shocks. The connectors were monitored for discontinuities greater than one microsecond, using a current of 100 milliamperes in the monitoring circuit.

3.8 Mating Force

The force required to mate individual connectors was measured, using a free floating fixture with the rate of travel at 0.25 inch/minute.

3.9 Unmating Force

The force required to unmate individual connectors was measured using a free floating fixture with the rate of travel at 1.0 inch/minute.

3.10 Contact Retention, plug, power

An axial load of 45 pounds was applied to each full wide cable and held for 60 seconds. The force was applied in a direction to cause removal of the cable from the housing.

3.11 Contact Retention, plug, signal

An axial load of 3 pounds was applied to each signal wire and held for 60 seconds. The force was applied in a direction to cause removal of the wire from the housing.

3.12 Contact Retention, receptacle, power

An axial load of 45 pounds was applied to each full wide cable and held for 60 seconds. The force was applied in a direction to cause removal of the cable from the housing.

3.13 Contact Retention, receptacle, signal

An axial load of 3 pounds was applied to each signal wire and held for 60 seconds. The force was applied in a direction to cause removal of the wire from the housing.

3.14 Crimp Tensile, plug

An axial force was applied to each plug at a crosshead rate of 1.0 inch per minute.

3.15 Crimp Tensile, receptacle

An axial force was applied to each receptacle at a crosshead rate of 1.0 inch per minute.

3.16 Durability

Connectors were mated and unmated 100 times at a rate not exceeding 600 per hour.

3.17 Housing Lock Strength

An axial load of 60 pounds was applied to mated connector assemblies. The force was applied in a direction normal to the plane of the connector.

3.18 Thermal Shock

Mated connectors were subjected to 5 cycles of temperature extremes with each cycle consisting of 30 minutes at each temperature. The temperature extremes were -40°C and 105°C. The transition between temperatures was less than one minute.

3.19 Humidity-Temperature Cycling

Mated connectors were exposed to 10 cycles of humidity-temperature cycling. Each cycle lasted 24 hours and consisted of cycling the temperature between 25°C and 65°C twice while the relative humidity was held at 95%.

3.20 Mixed Flowing Gas, Class III

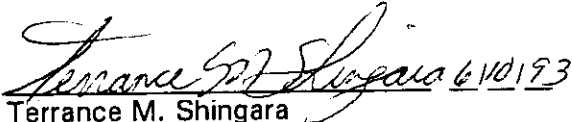
Mated connectors were exposed for 20 days to a mixed flowing gas Class III exposure. Class III exposure is defined as a temperature of 30°C and a relative humidity of 75% with the pollutants of C1₂ at 20 ppb, NO₂ at 200 ppb, and H₂S at 100 ppb.

3.21 Temperature Life

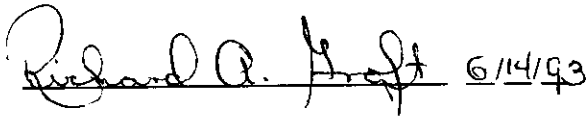
Mated samples were exposed to a temperature of 140°C for 720 hours.

4. Validation


Prepared by:


Terrance M. Shingara
Test Engineer
Design Assurance Testing
Corporate Test Laboratory

Reviewed by:


Richard A. Groft
Supervisor
Design Assurance Testing
Corporate Test Laboratory

Approved by:


Robert Grebe
Manager
Strategic products Center, Phoenix Az.