


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H	REVISED PER PCN E-20-018081	10MAR2021	SCK	-

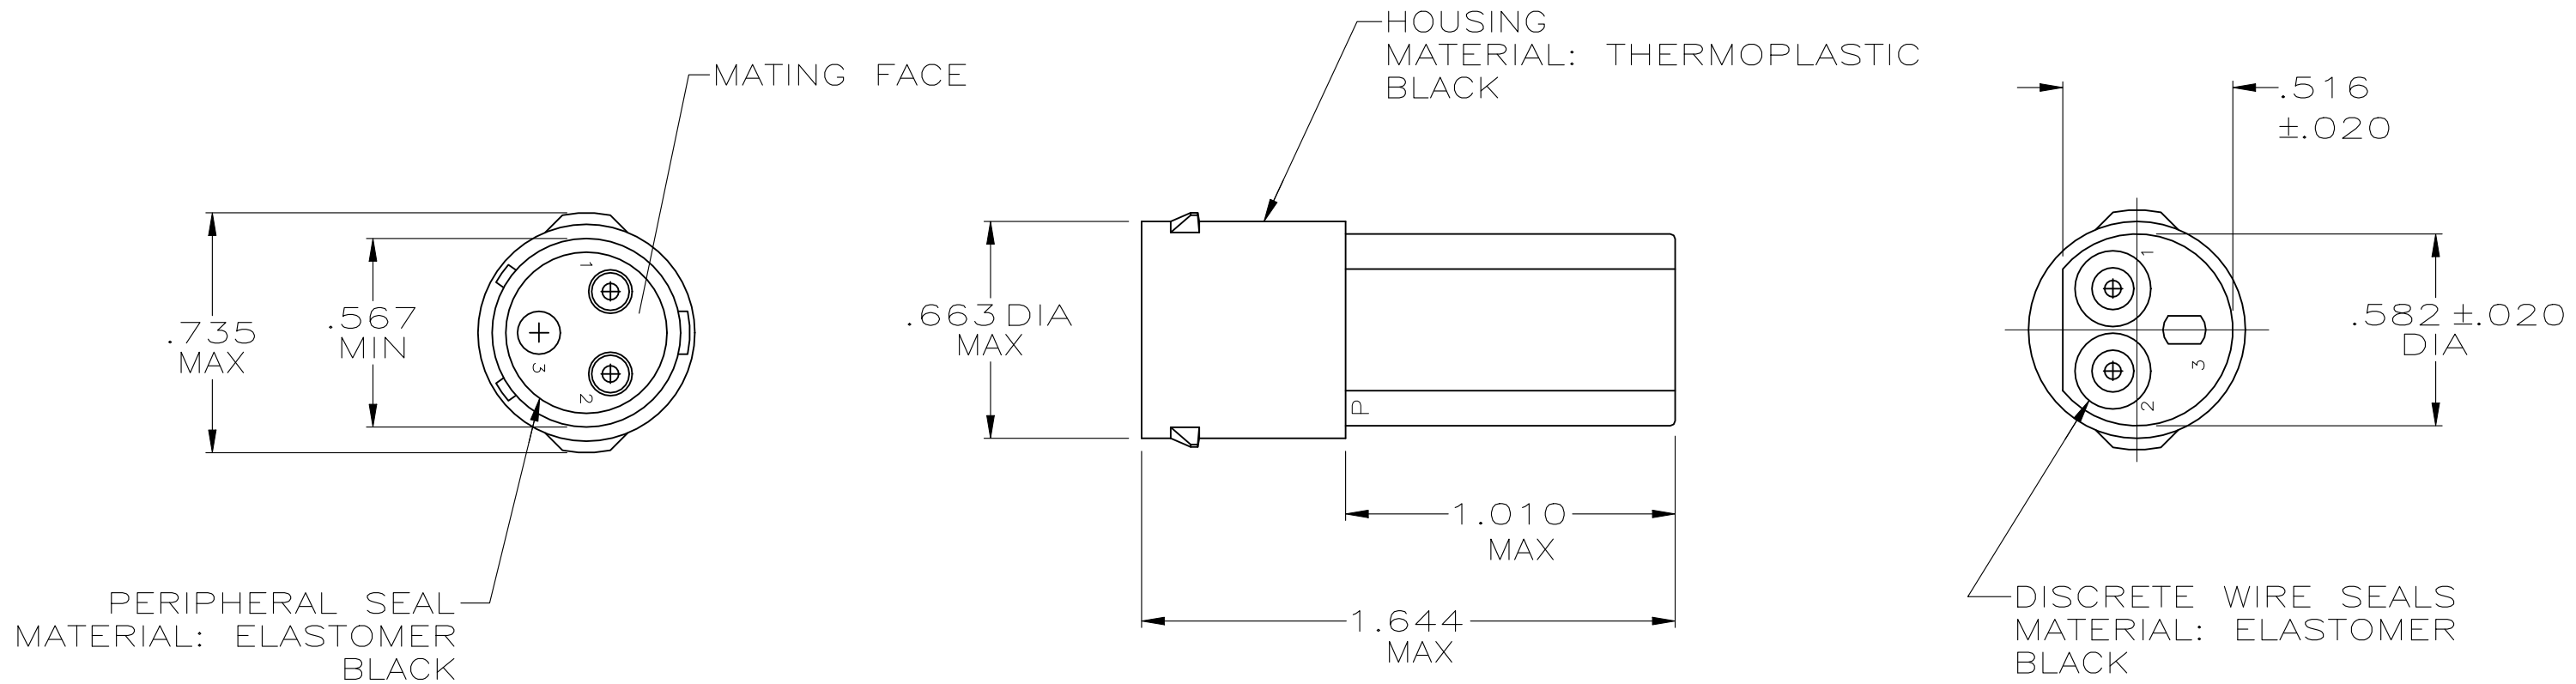

PERIPHERAL SEAL  
MATERIAL: ELASTOMER  
BLACK

HOUSING  
MATERIAL: THERMOPLASTIC  
BLACK

DISCRETE WIRE SEALS  
MATERIAL: ELASTOMER  
BLACK

1. WIRE INSULATION SEALING RANGE .070-.130 DIA.
2. THIN MEMBRANE PERMISSIBLE ON SMALL DIAMETER OF WIRE SEALS.
3. ROTATION OF CAVITY CIRCUIT KEY FROM PART TO PART IS PERMISSIBLE.

OBSOLETE	NO	207846-2
	YES	207846-1
	SEALS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J GALLUCCI BG 8-20-90	<b>STE</b> TE Connectivity		
		CHK J MCCLINTON 1-4-91			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	± -	RECEPTACLE, 2 POSITION, STANDARD ECONOSEAL CONNECTOR	
		1 PLC	± -		
		2 PLC	± -		
		3 PLC	± -		
MATERIAL		4 PLC	± -	SIZE	CAGE CODE
SEE CALLOUT		ANGLES	± -	W	00779
		FINISH	-	DRAWING NO	C-207846
				RESTRICTED TO	-
				SCALE	2:1
				SHEET	1 OF 1
				REV	H
				CUSTOMER DRAWING	