
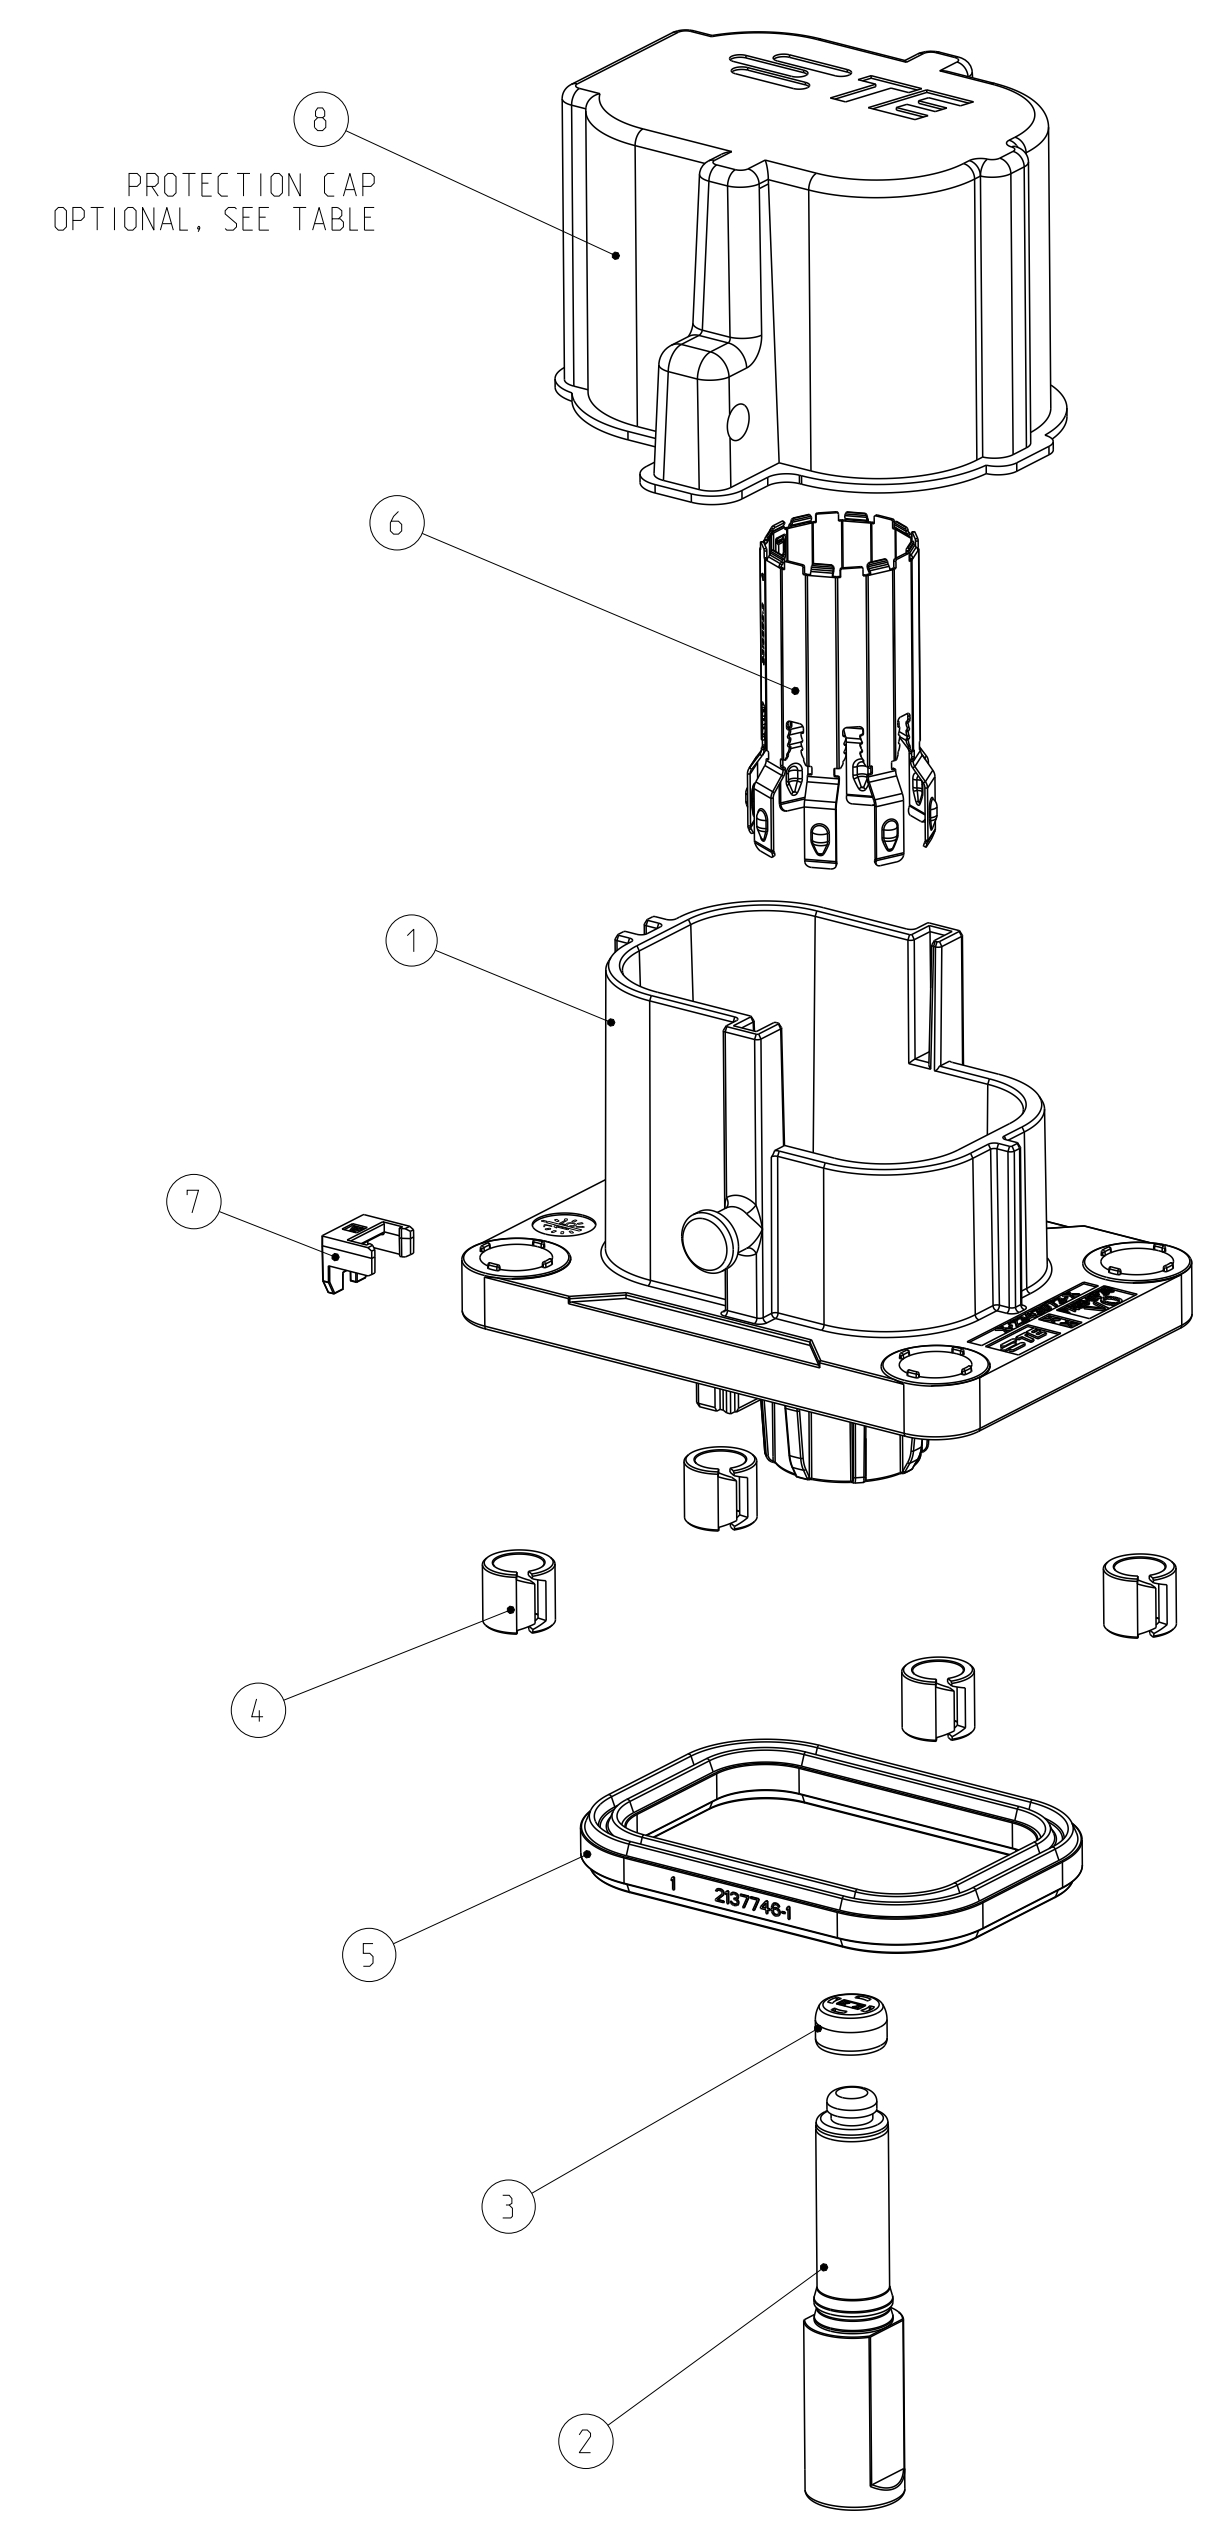
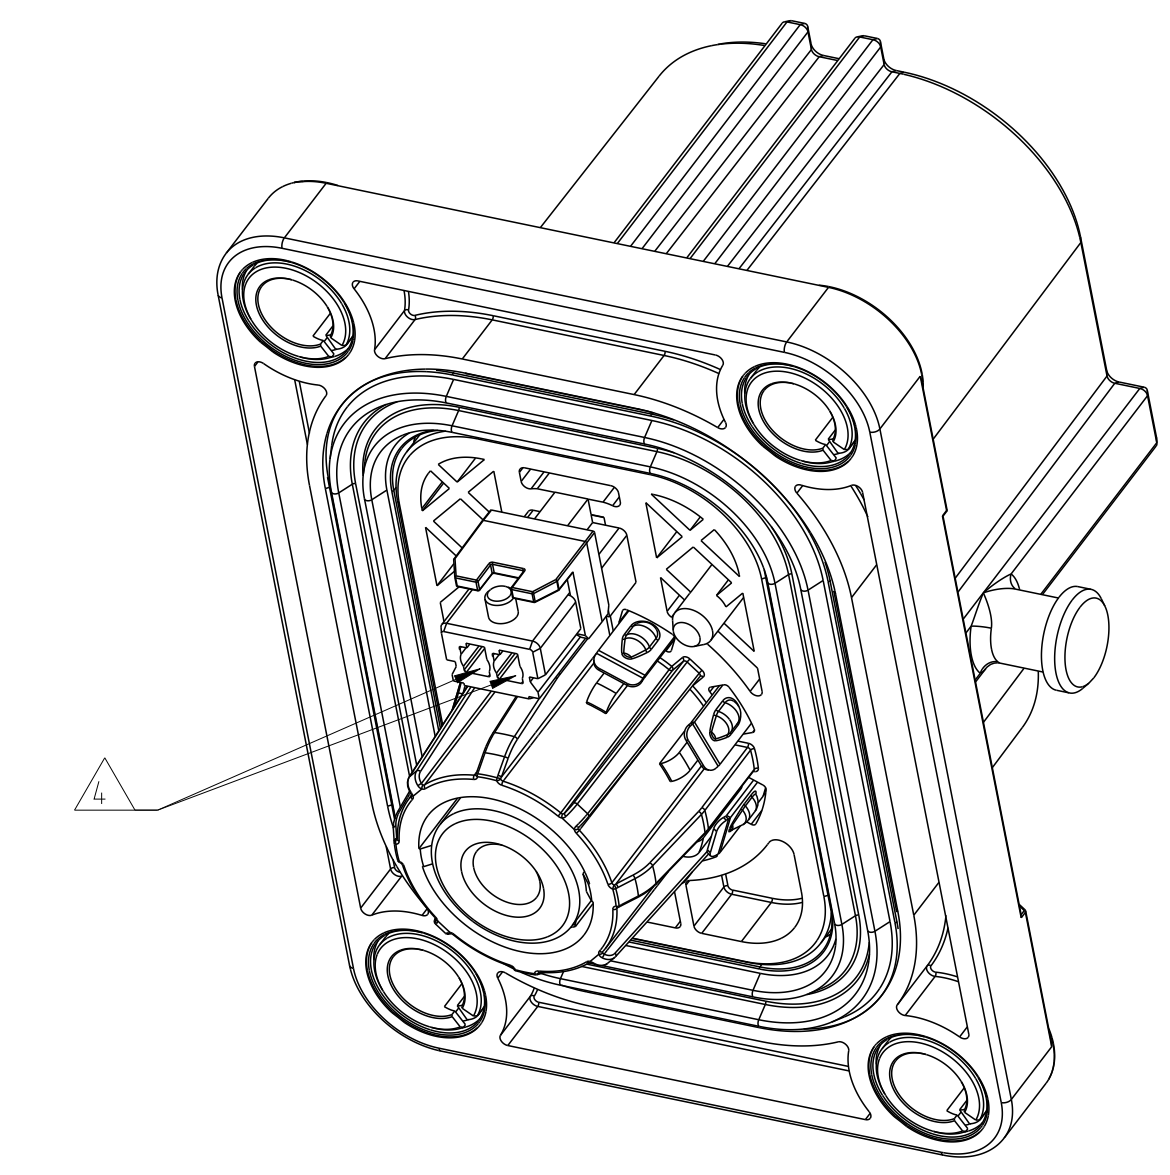
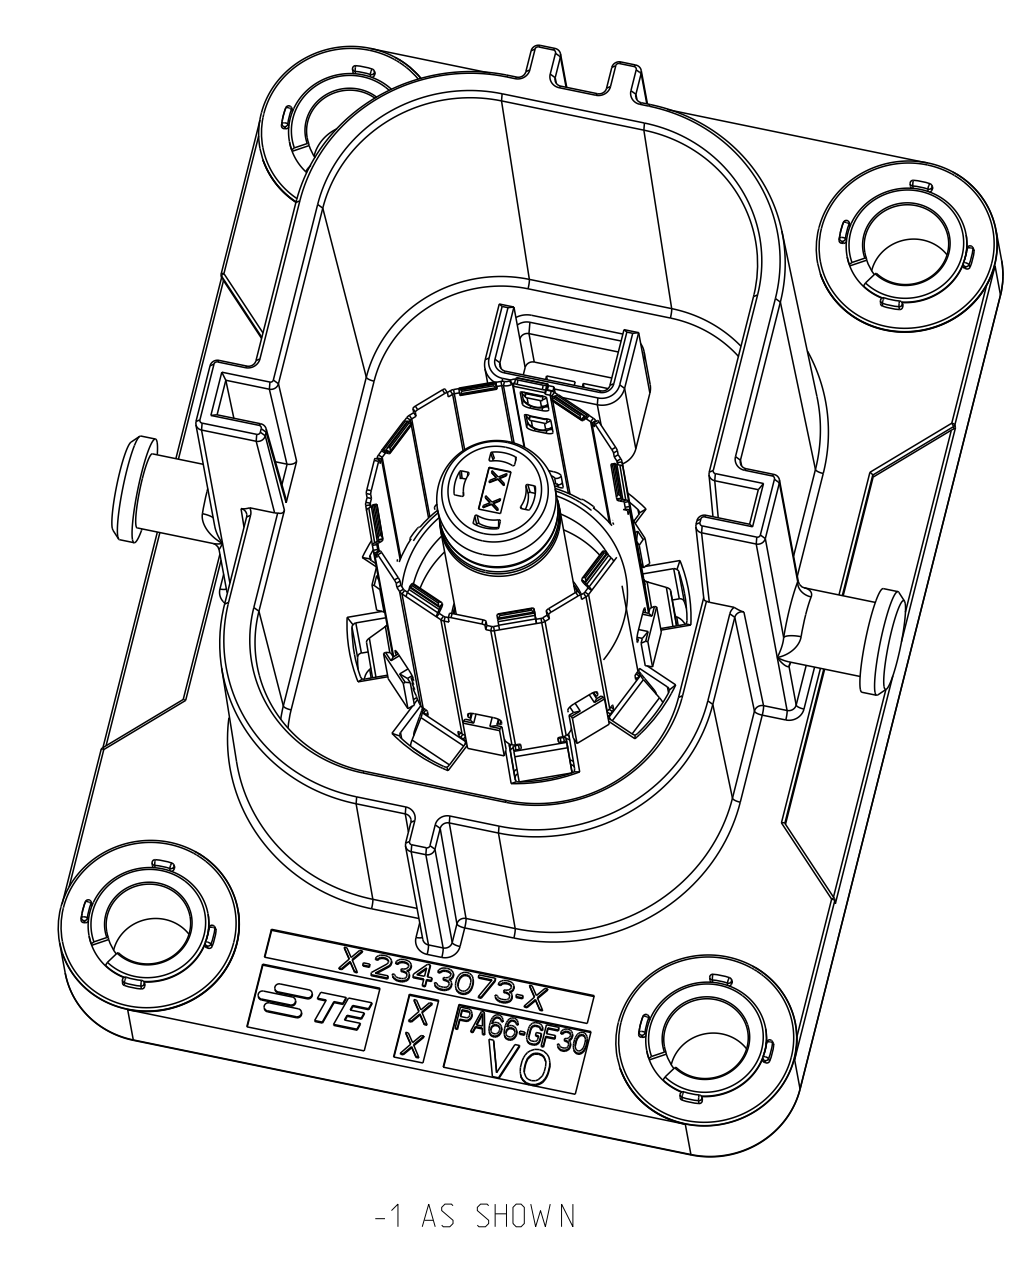
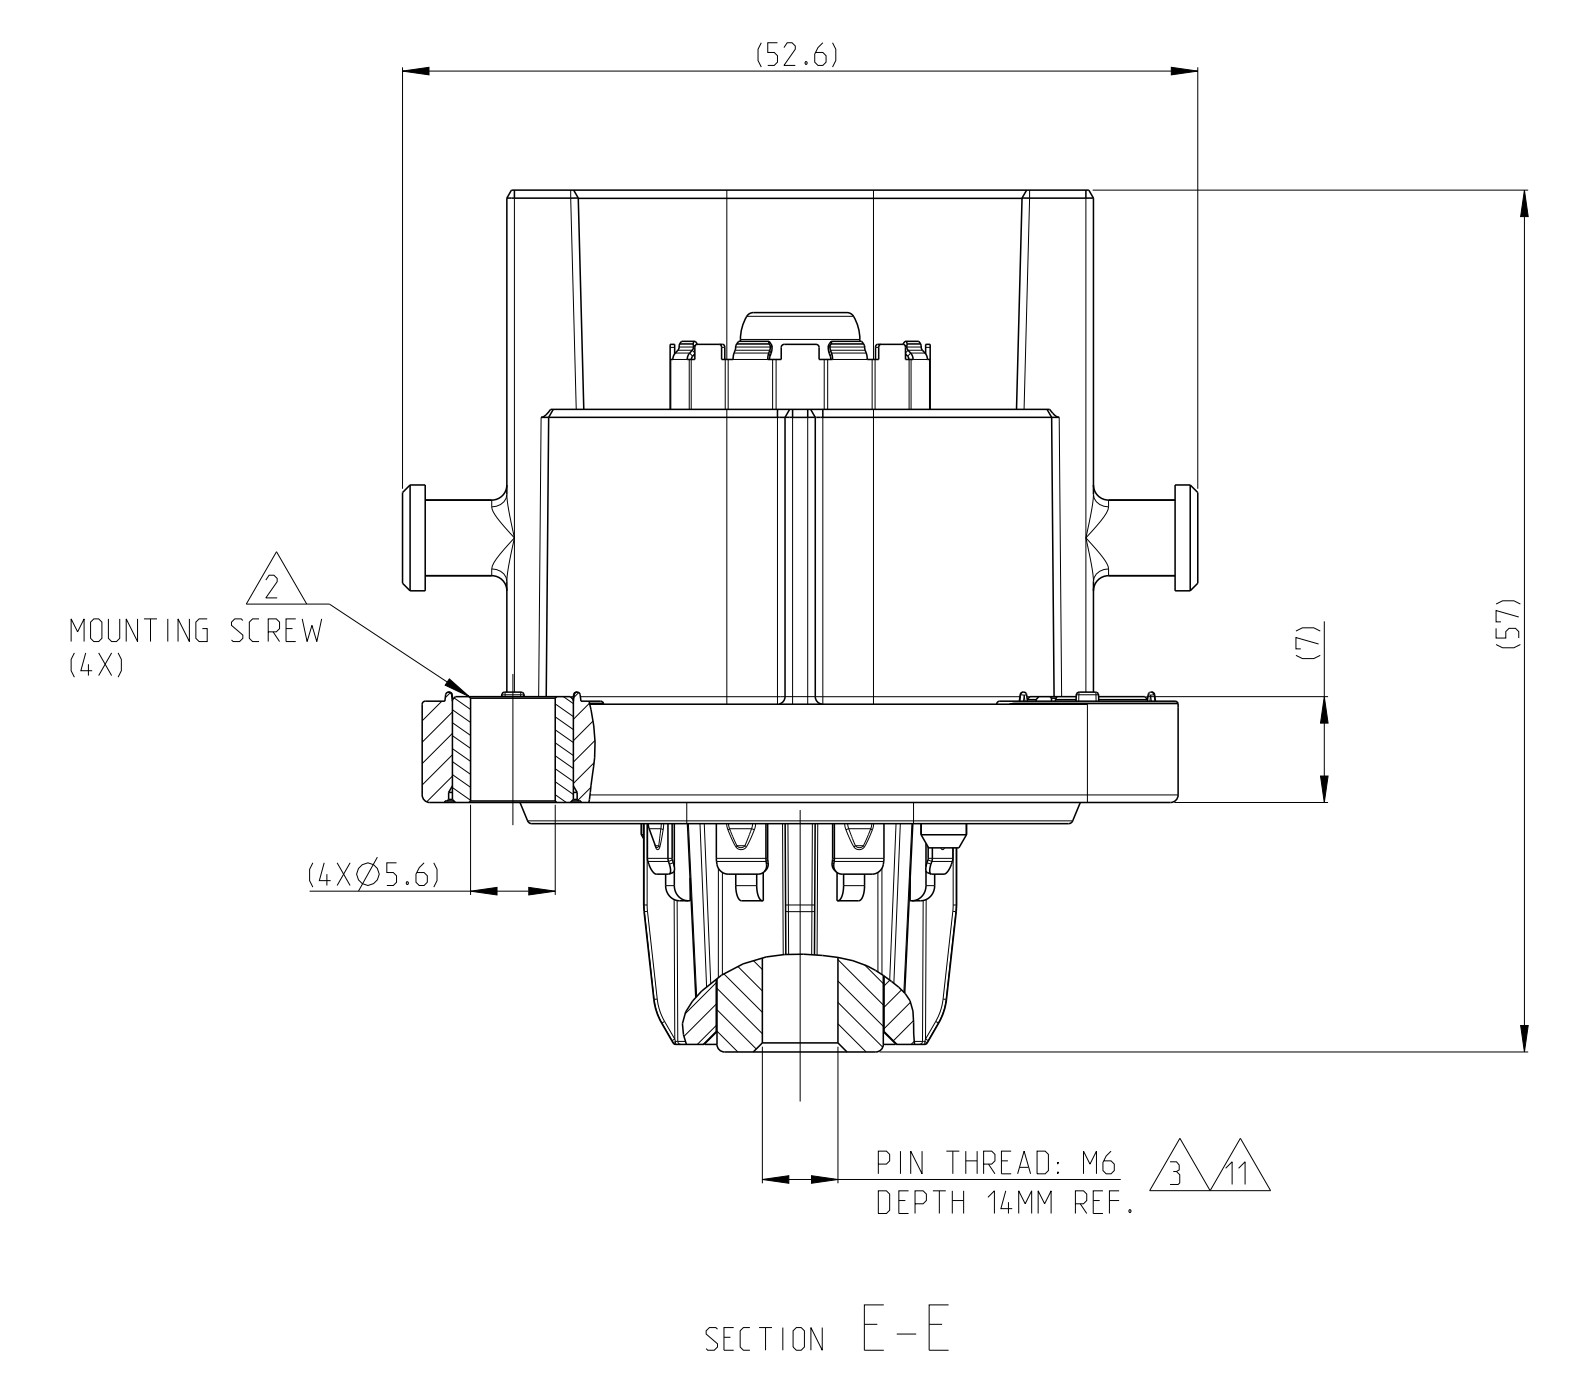
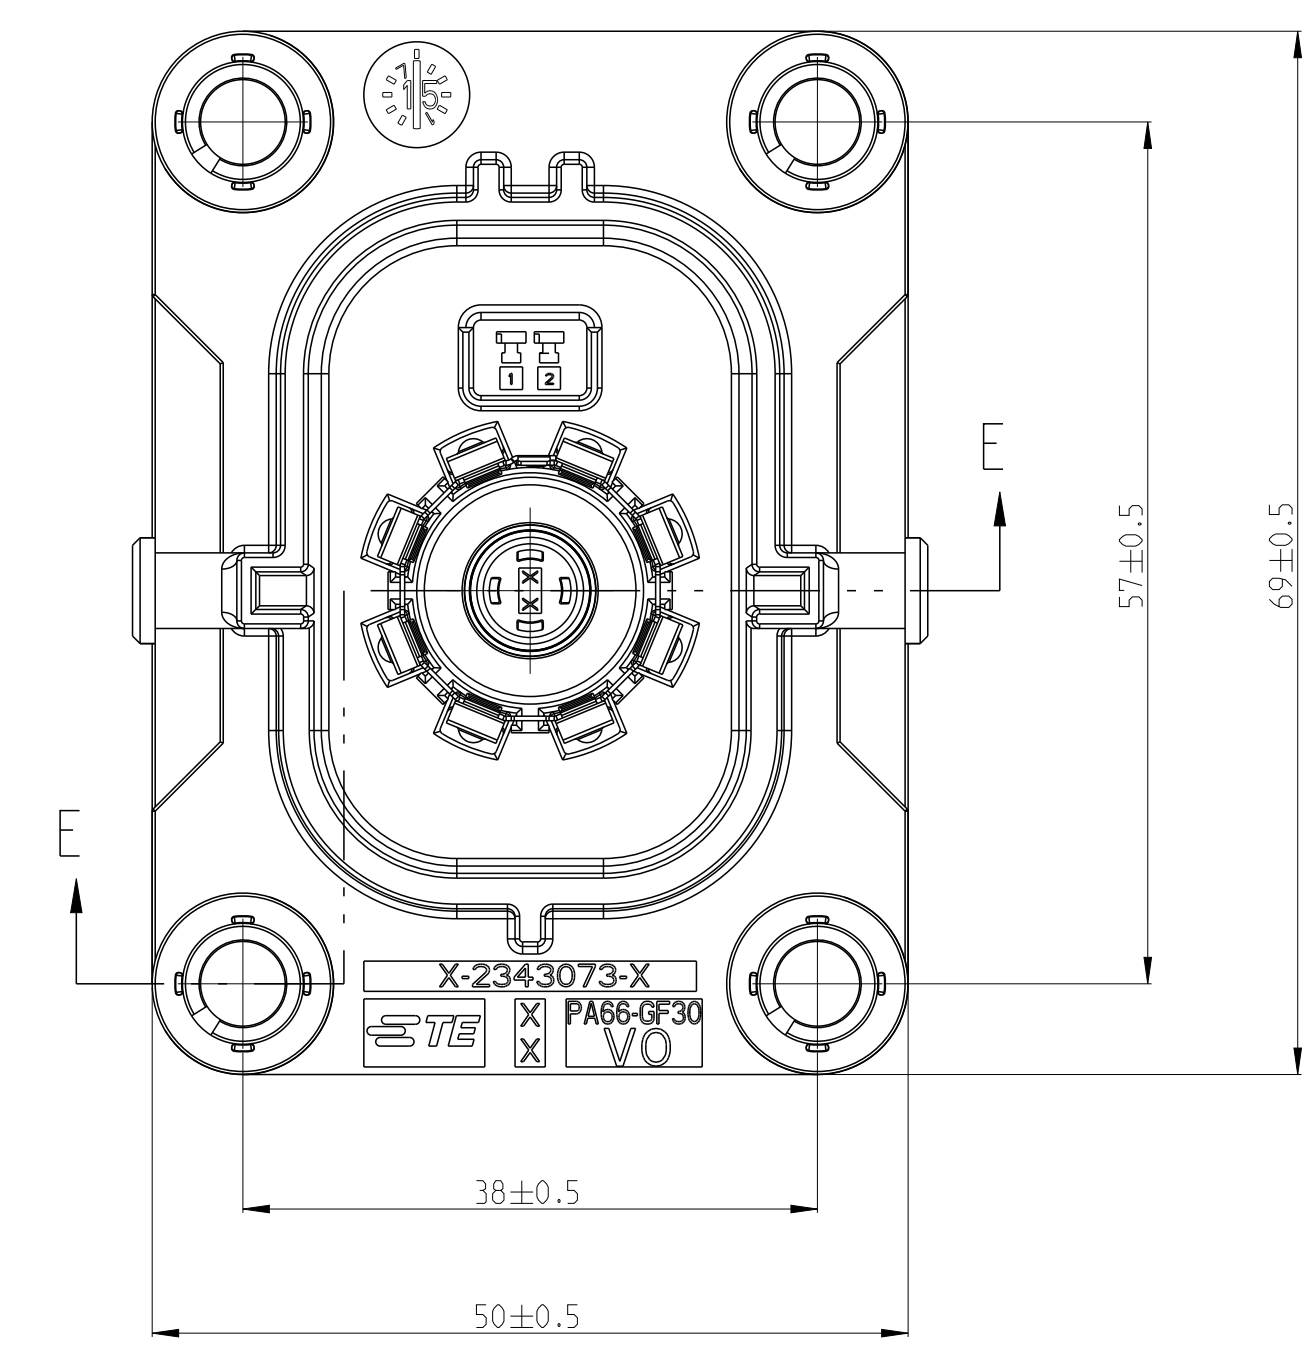


REVISIONS				
REV	DATE	DESCRIPTION	BY	APPD
C	2002119	REVISED (CR-19-01037)	F.S	E.J
C1	29JAN21	ECR-20-007620	SK	E.J
C2	08DEC23	ECR-23-168454	E.C	Z.2
C3	08DEC23	ECR-23-194441	H.P	Z.2




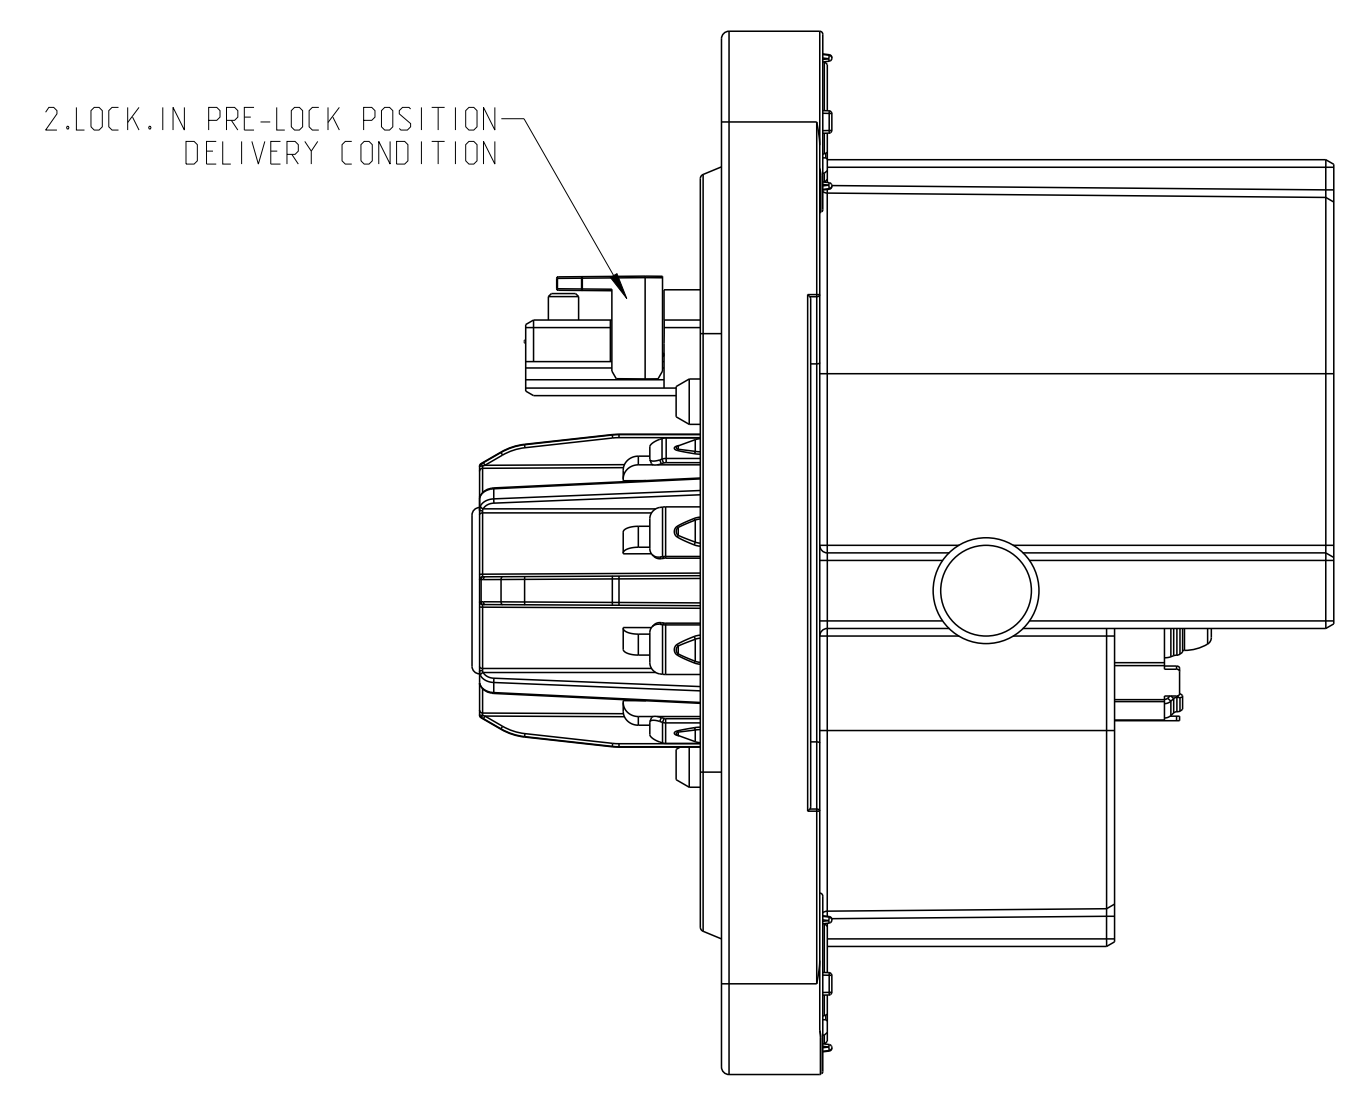


- NOTES:
- 1. LAYER PACKING WITH CORRUGATED
  - △ MOUNTING SCREW M5 WITH MINIMUM SCREW HEAD Ø10mm  
RECOMMENDED TIGHTENING TORQUE OF THE SCREW 6±0.5NM
  - △ RECOMMENDED TIGHTENING TORQUE OF THE SCREW M6=8±1NM; M8=10±1NM
  - △ SUITABLE HVIL CONTACTS TE P/N 1418760-3
  - 5. COUNTERPART SEE TE DRAWING 2324136/2324086
  - △ SEALING AREA: NO BURR, TOOL PARTING, SHRINKAGE, CAVITIES AND GATE MARK PERMITTED. SURFACE QUALITY: Ra<=0.8µm
  - △ MATERIAL: CORROSION RESISTANT. ELECTROCONDUCTIVE FOR INTERFACE
  - △ PRODUCT SPEC:  
90DEG: 108-101439  
180DEG: 108-101481
  - 9. SHIELDING IS TIN PLATING.
  - △ APPLICATION TEMPERATURE -40°C ~ 125°C
  - △ M6 STANDARD PIN VERSION
  - △ M6 BUSBAR PIN VERSION
  - △ M8 BUSBAR VERSION
  - 14 □ MARK SHOWNS THE CHANGE POINT OF REV.C2 DWG.



QTY EACH ASSEMBLY														MATERIAL	DESCRIPTION	SURFACE COLOR/PLATING	ITEM
1	1	1	1	1	1	1	1	-	-	-	-	-	-	PS	PROTECTION CAP	BLACK	8
1	1	1	1	1	1	1	1	1	1	1	1	1	1	PA66-GF UL94 V0	SECONDARY LOCK, HEADER	RED	7
1	1	1	1	1	1	1	1	1	1	1	1	1	1	Cu-ALLOY	SHIELDING SLEEVE	TIN PLATING	6
1	1	1	1	1	1	1	1	1	1	1	1	1	1	MVQ	INTERFACIAL SEAL	NATURAL WHITE	5
4	4	4	4	4	4	4	4	4	4	4	4	4	4	CARBON STEEL	COMPRESSION DELIMITER, M5	ZnNi PLATING	4
-	-	1	-	-	1	-	-	-	1	-	-	1	-	PA66-GF UL94 V0	PTOTECTION COVER 8MM HV	WHITE	3
-	-	-	1	-	-	-	-	-	-	-	1	-	-		PTOTECTION COVER 8MM HV	RED	3
1	1	-	-	1	-	-	-	1	-	-	-	-	1		PTOTECTION COVER 8MM HV	BLACK	3
1	1	1	1	1	1	1	1	1	1	1	1	1	1	Cu-ALLOY	PIN DIA 8mm CONTACT	Ag PLATING	2
-	-	1	-	-	-	-	-	-	1	-	-	-	-	PA66-GF UL94 V0	P2P 1P HEADER HSG. COD.A	GREY	1
-	-	-	1	-	-	-	-	-	-	-	-	-	-		P2P 1P HEADER HSG. COD.F	ORANGE	1
-	-	-	-	1	-	-	-	-	-	-	-	-	-		P2P 1P HEADER HSG. COD.E		1
-	-	-	-	-	1	-	-	-	-	-	-	-	-		P2P 1P HEADER HSG. COD.D		1
-	-	-	-	-	-	1	-	-	-	-	-	-	-		P2P 1P HEADER HSG. COD.C		1
-	-	-	-	-	-	-	1	-	-	-	-	-	-		P2P 1P HEADER HSG. COD.B		1
-	-	-	-	-	-	-	-	1	-	-	-	-	-	P2P 1P HEADER HSG. COD.A	1		
ASSY P/N														DESCRIPTION OF ASSEMBLY			
CODING														ASSY WEIGHT(g)			
P2P 1P HEADER ASSEMBLY														DESCRIPTION OF ASSEMBLY			

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 21AUG2017. CH: JIANG. APPROV: 18SEP2017. PRODUCT SPEC: P2P 1P HEADER ASSY. DIMENSIONS: UNLESS OTHERWISE SPECIFIED, ±0.5. MATERIAL: PA66-GF UL94 V0. SURFACE: ±0.004. TYPICAL TOLERANCE: ±0.1. SCALE: 2:1. SHEET 1 OF 3. REV: C3.

REVISIONS			
NO.	DATE	DESCRIPTION	BY
1		SEE SHEET 1	

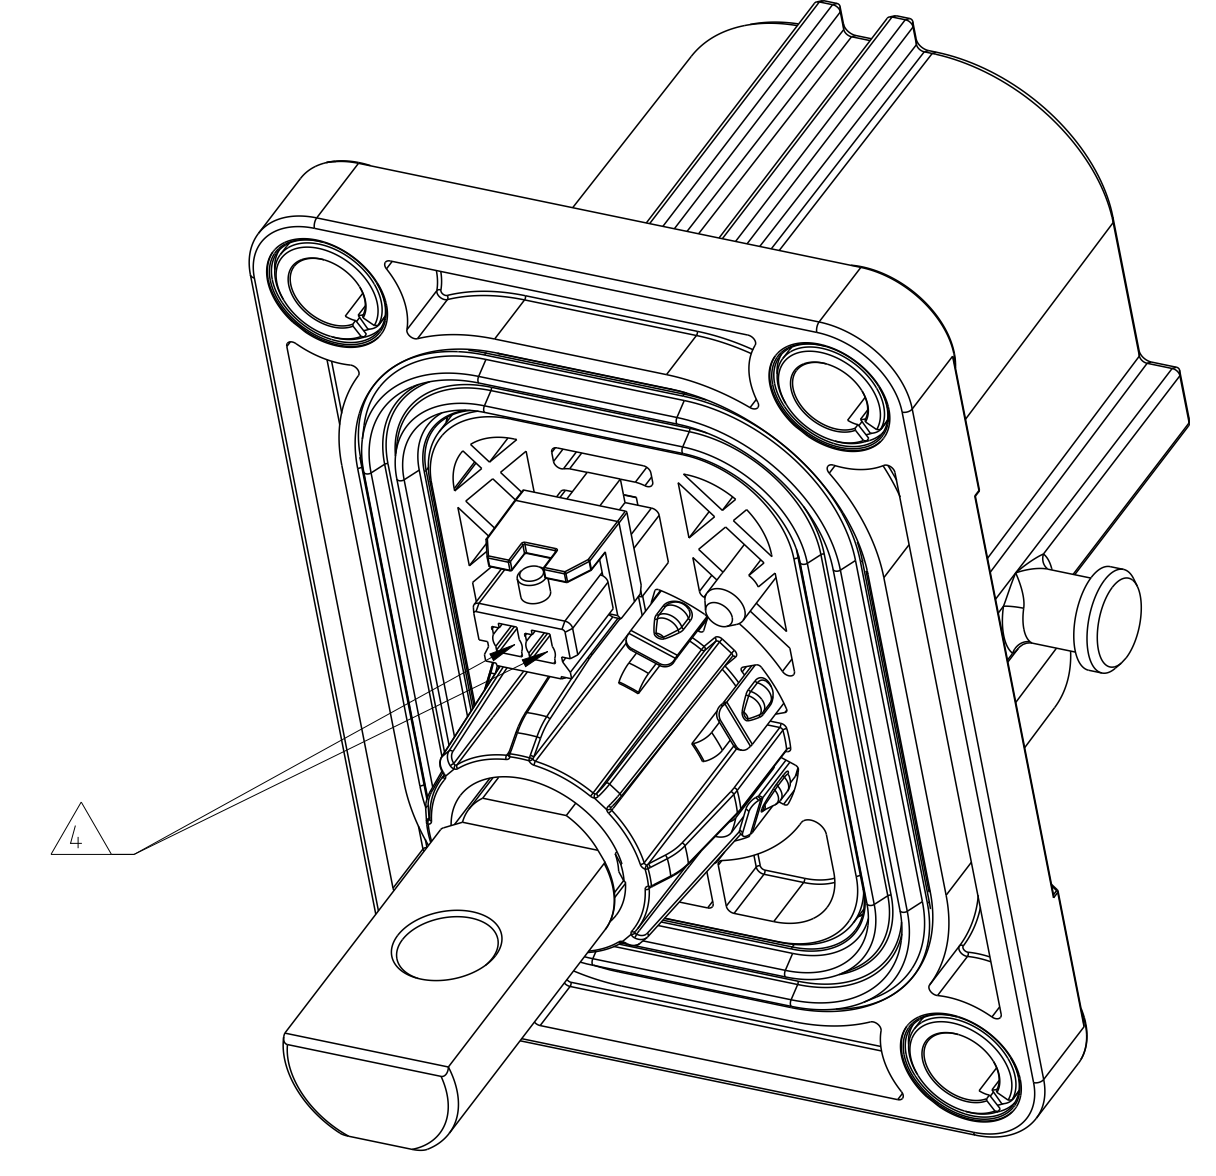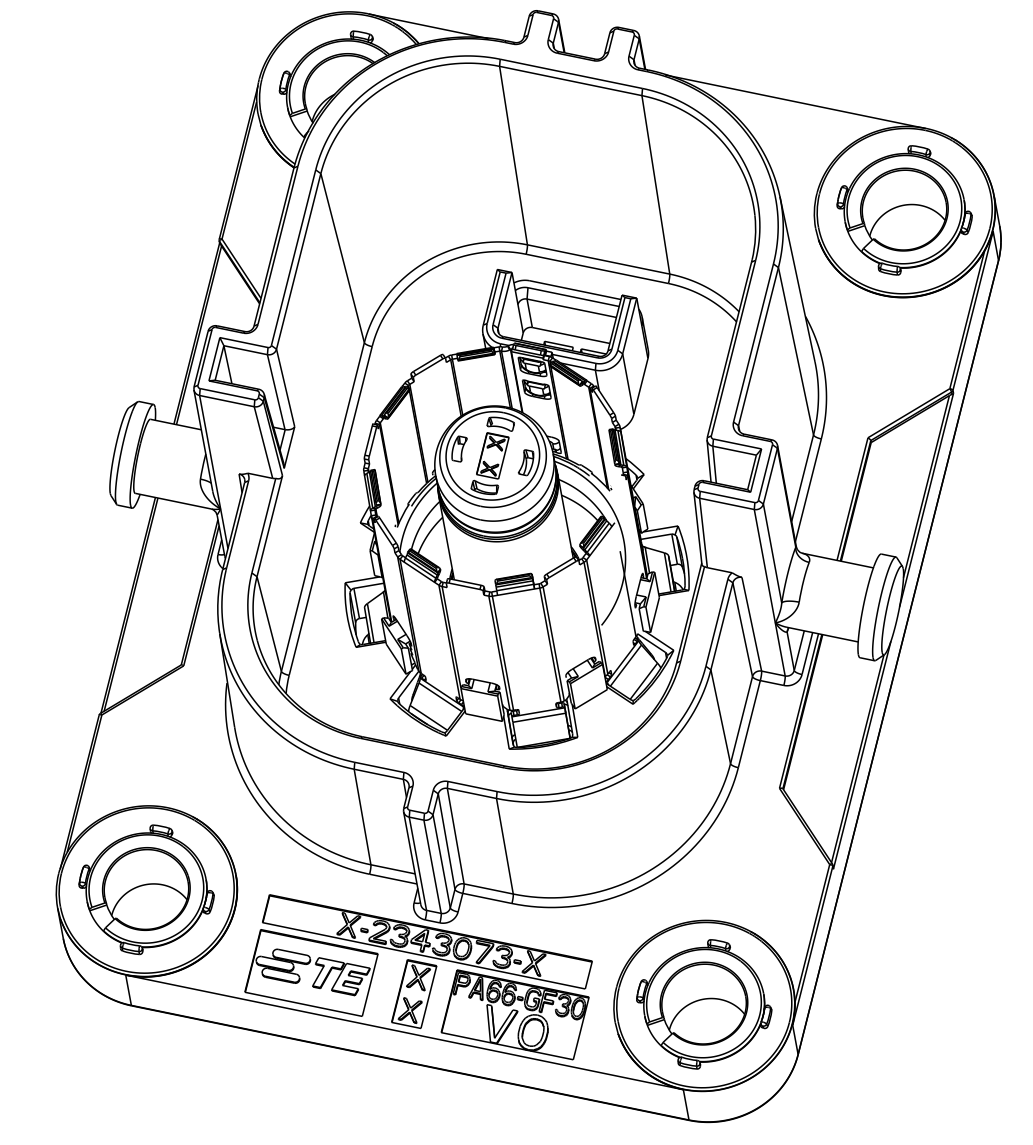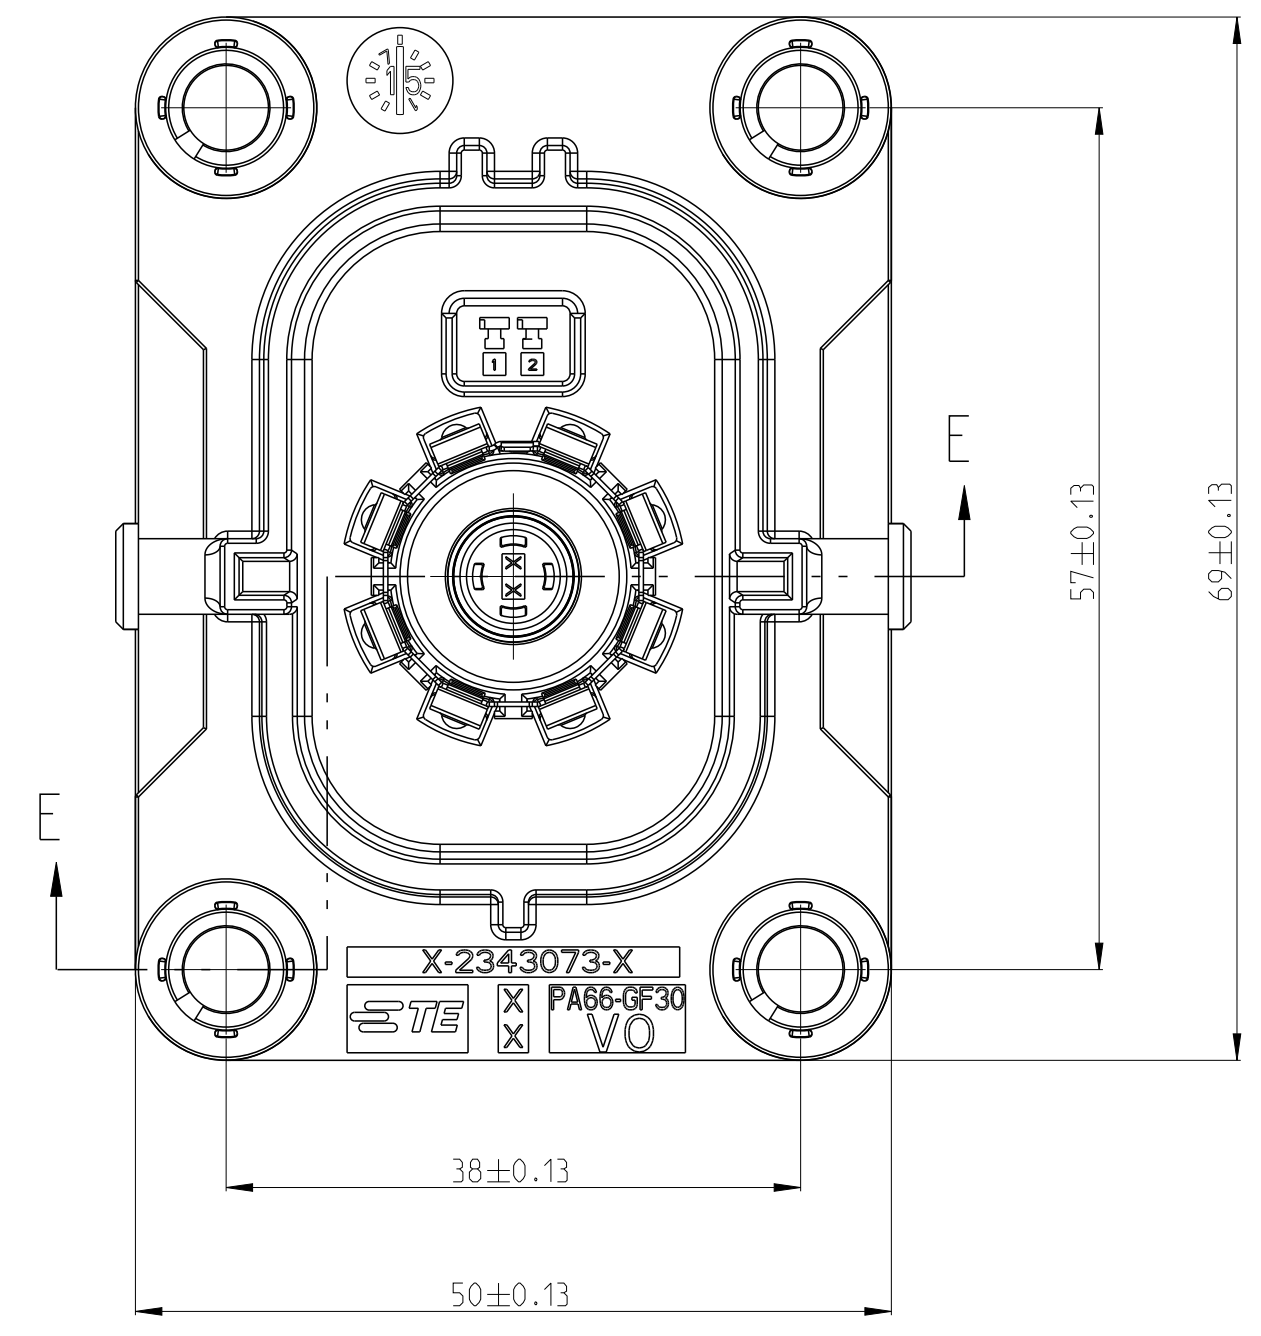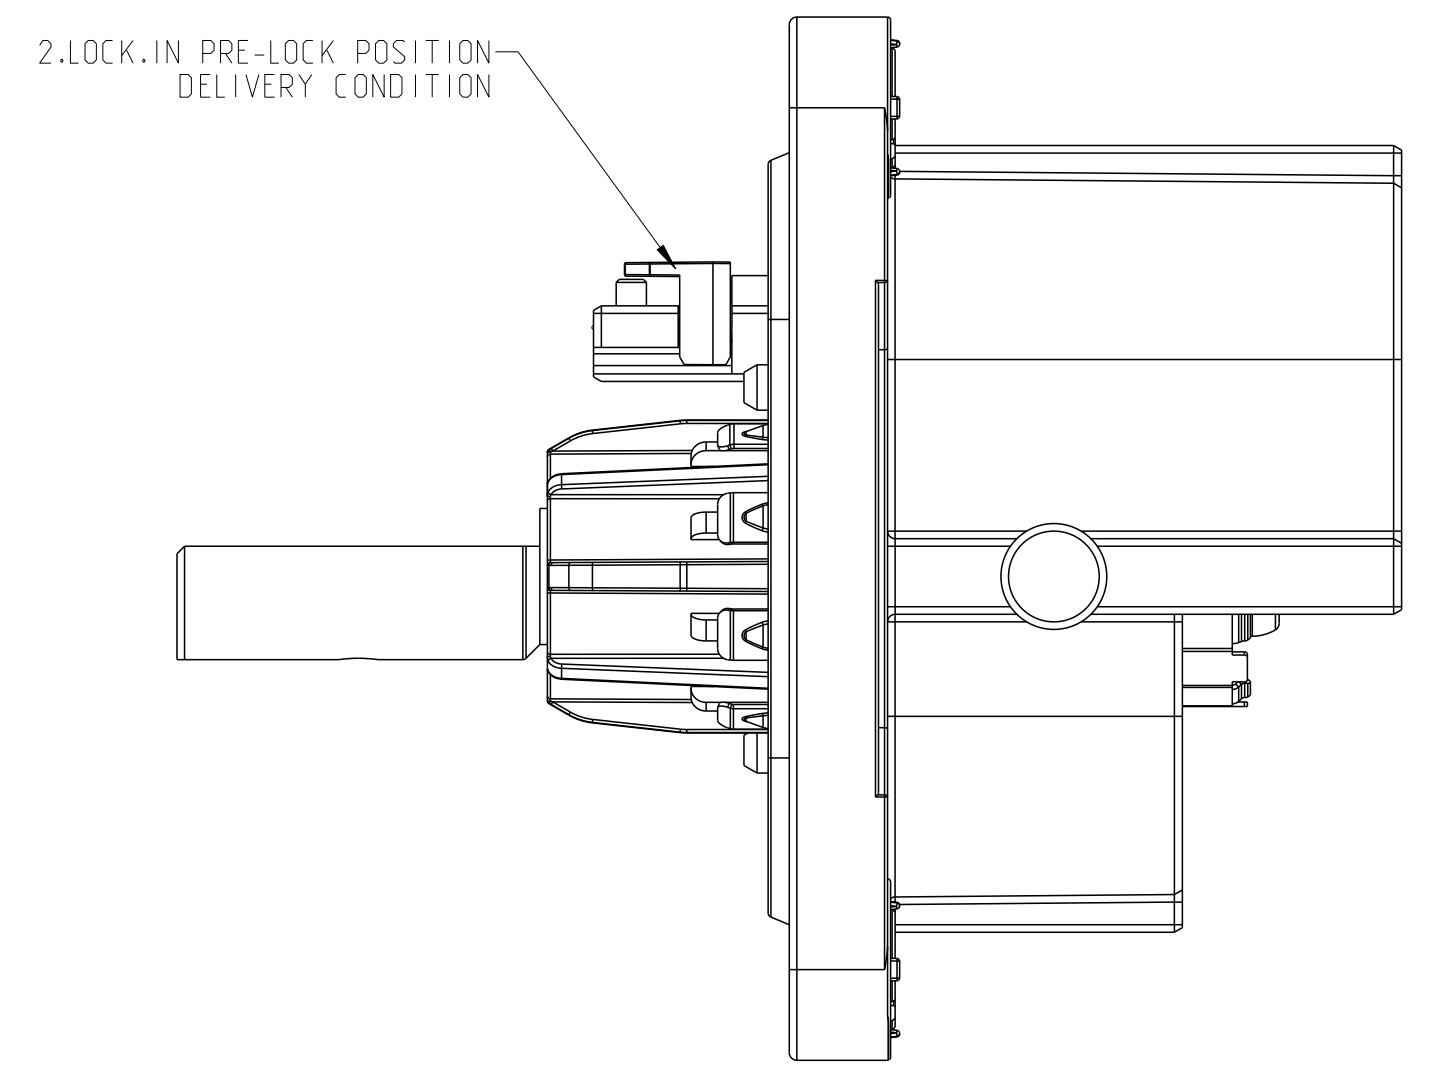


4--1 AS SHOWN

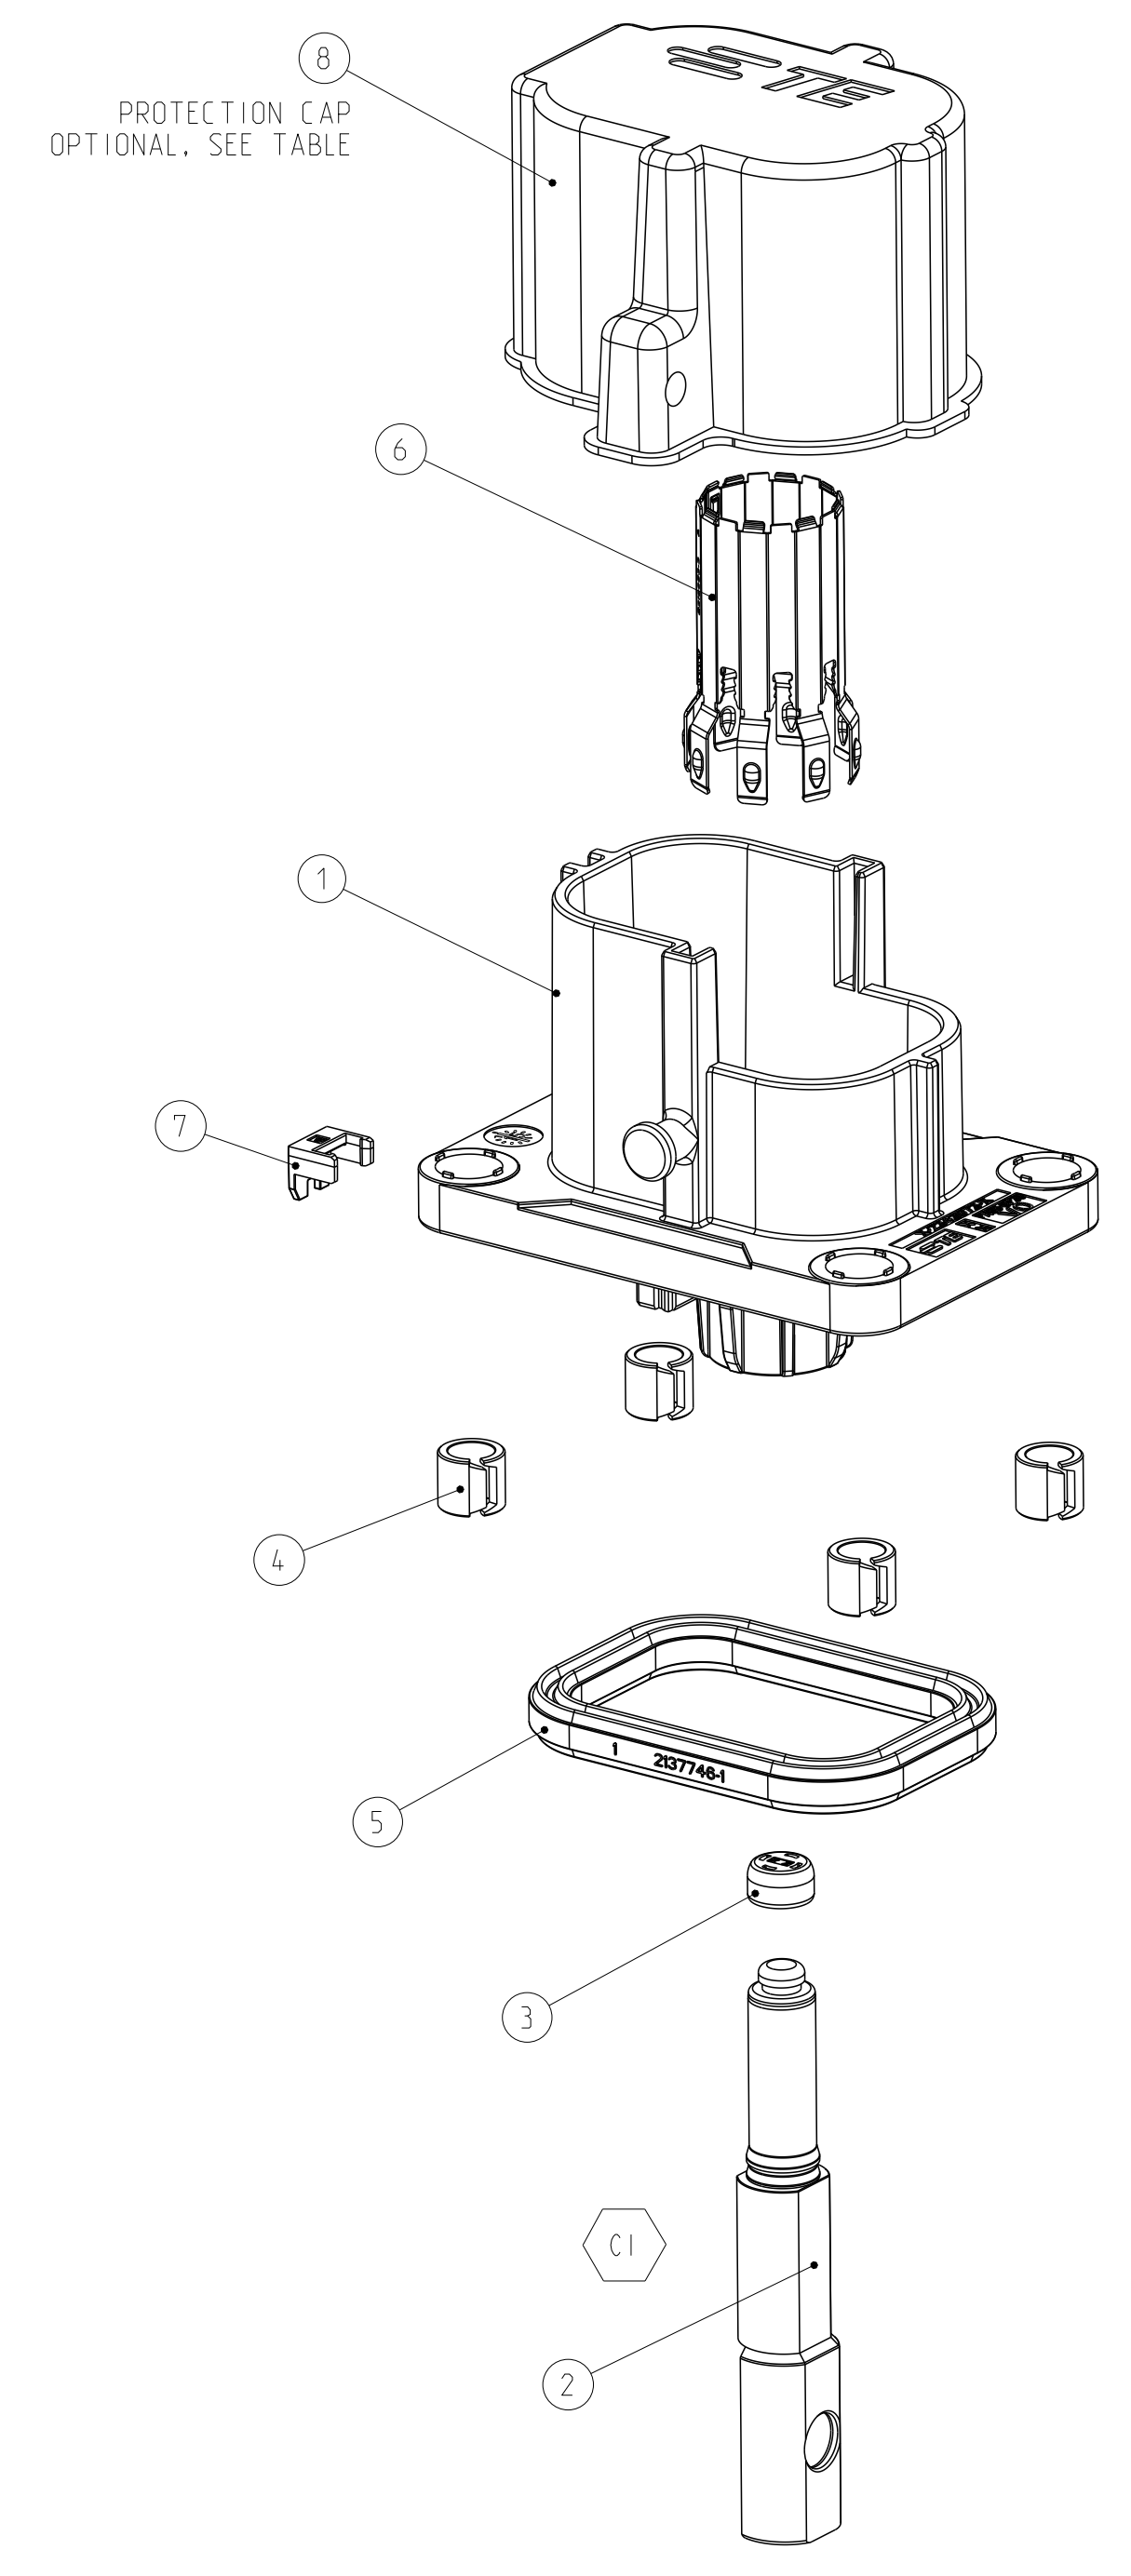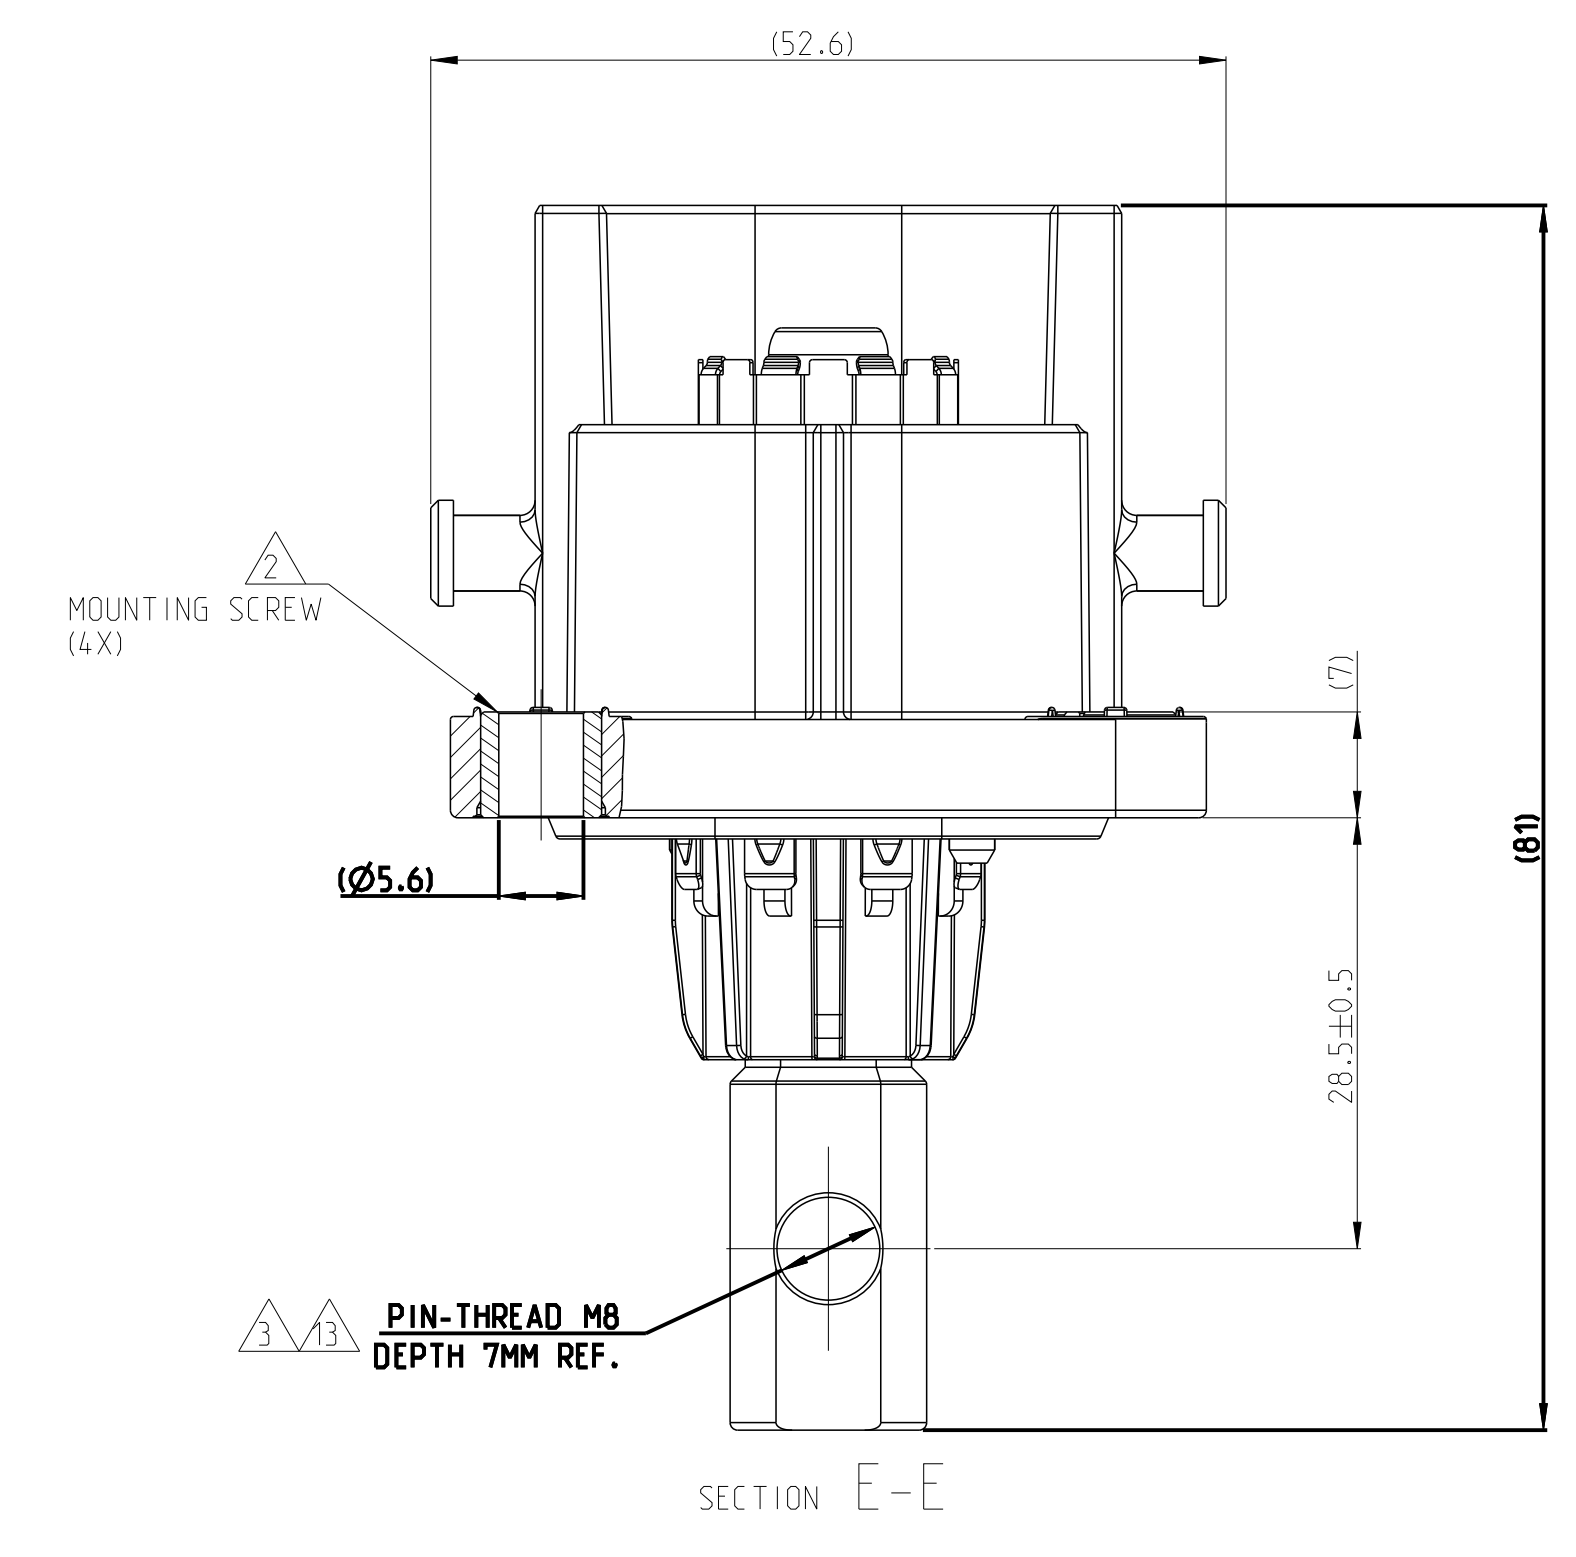


QTY EACH ASSEMBLY												MATERIAL	DESCRIPTION	SURFACE COLOR/PLATING	ITEM
1	1	1	1	1	1	1	-	-	-	-	-	PS	PROTECTION CAP	BLACK	8
1	1	1	1	1	1	1	1	1	1	1	1	PA66-GF UL94 V0	SECONDARY LOCK, HEADER	RED	7
1	1	1	1	1	1	1	1	1	1	1	1	Cu-ALLOY	SHIELDING SLEEVE	TIN PLATING	6
1	1	1	1	1	1	1	1	1	1	1	1	MVQ	INTERFACIAL SEAL	NATURAL WHITE	5
4	4	4	4	4	4	4	4	4	4	4	4	CARBON STEEL	COMPRESSION DELIMITER, M5	ZnNi PLATING	4
-	1	-	-	1	-	-	-	1	-	-	1	-	PTOTECTION COVER 8MM HV	WHITE	3
-	-	1	-	-	1	-	-	-	1	-	-	1	PTOTECTION COVER 8MM HV	RED	3
1	-	-	1	-	-	1	-	-	-	1	-	1	PTOTECTION COVER 8MM HV	BALCK	3
1	1	1	1	1	1	1	1	1	1	1	1	Cu-ALLOY	PIN DIA 8mm CONTACT	Ag PLATING	2
1	-	-	-	-	-	-	-	1	-	-	-	-	P2P 1P HEADER HSG, COD.A	GREY	1
-	1	-	-	-	-	-	-	-	1	-	-	-	P2P 1P HEADER HSG, COD.F	ORANGE	1
-	-	1	-	-	-	-	-	-	-	1	-	-	P2P 1P HEADER HSG, COD.E	ORANGE	1
-	-	-	1	-	-	-	-	-	-	-	1	-	P2P 1P HEADER HSG, COD.D	ORANGE	1
-	-	-	-	1	-	-	-	-	-	-	-	1	P2P 1P HEADER HSG, COD.C	ORANGE	1
-	-	-	-	-	1	-	-	-	-	-	-	1	P2P 1P HEADER HSG, COD.B	ORANGE	1
-	-	-	-	-	-	1	-	-	-	-	-	1	P2P 1P HEADER HSG, COD.A	ORANGE	1
ASSY P/N															
CODING															
ASSY WEIGHT(g)															
DESCRIPTION OF ASSEMBLY															

THIS DRAWING IS A CONTROLLED DOCUMENT. DATE: 21AUG2017  
 DIMENSIONS: UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS. TOLERANCES: ±0.5  
 DRAWN: J. LIANG  
 CHECKED: E. JIANG  
 APPROVED: T. YIN  
 PRODUCT SPEC: 18SEP2017  
 CUSTOMER DRAWING: A0  
 SCALE: 2:1  
 SHEET: 2 of 3  
 REV: 1  
 NAME: P2P 1P HEADER ASSY  
 SIZE: A0  
 CASE CODE: -  
 DRAWING NO: C=2324108  
 RESTRICTED TO: [ ]  
 CUSTOMER DRAWING


REVISIONS			
REV	DATE	BY	APPV
1			
SEE SHEET 1			

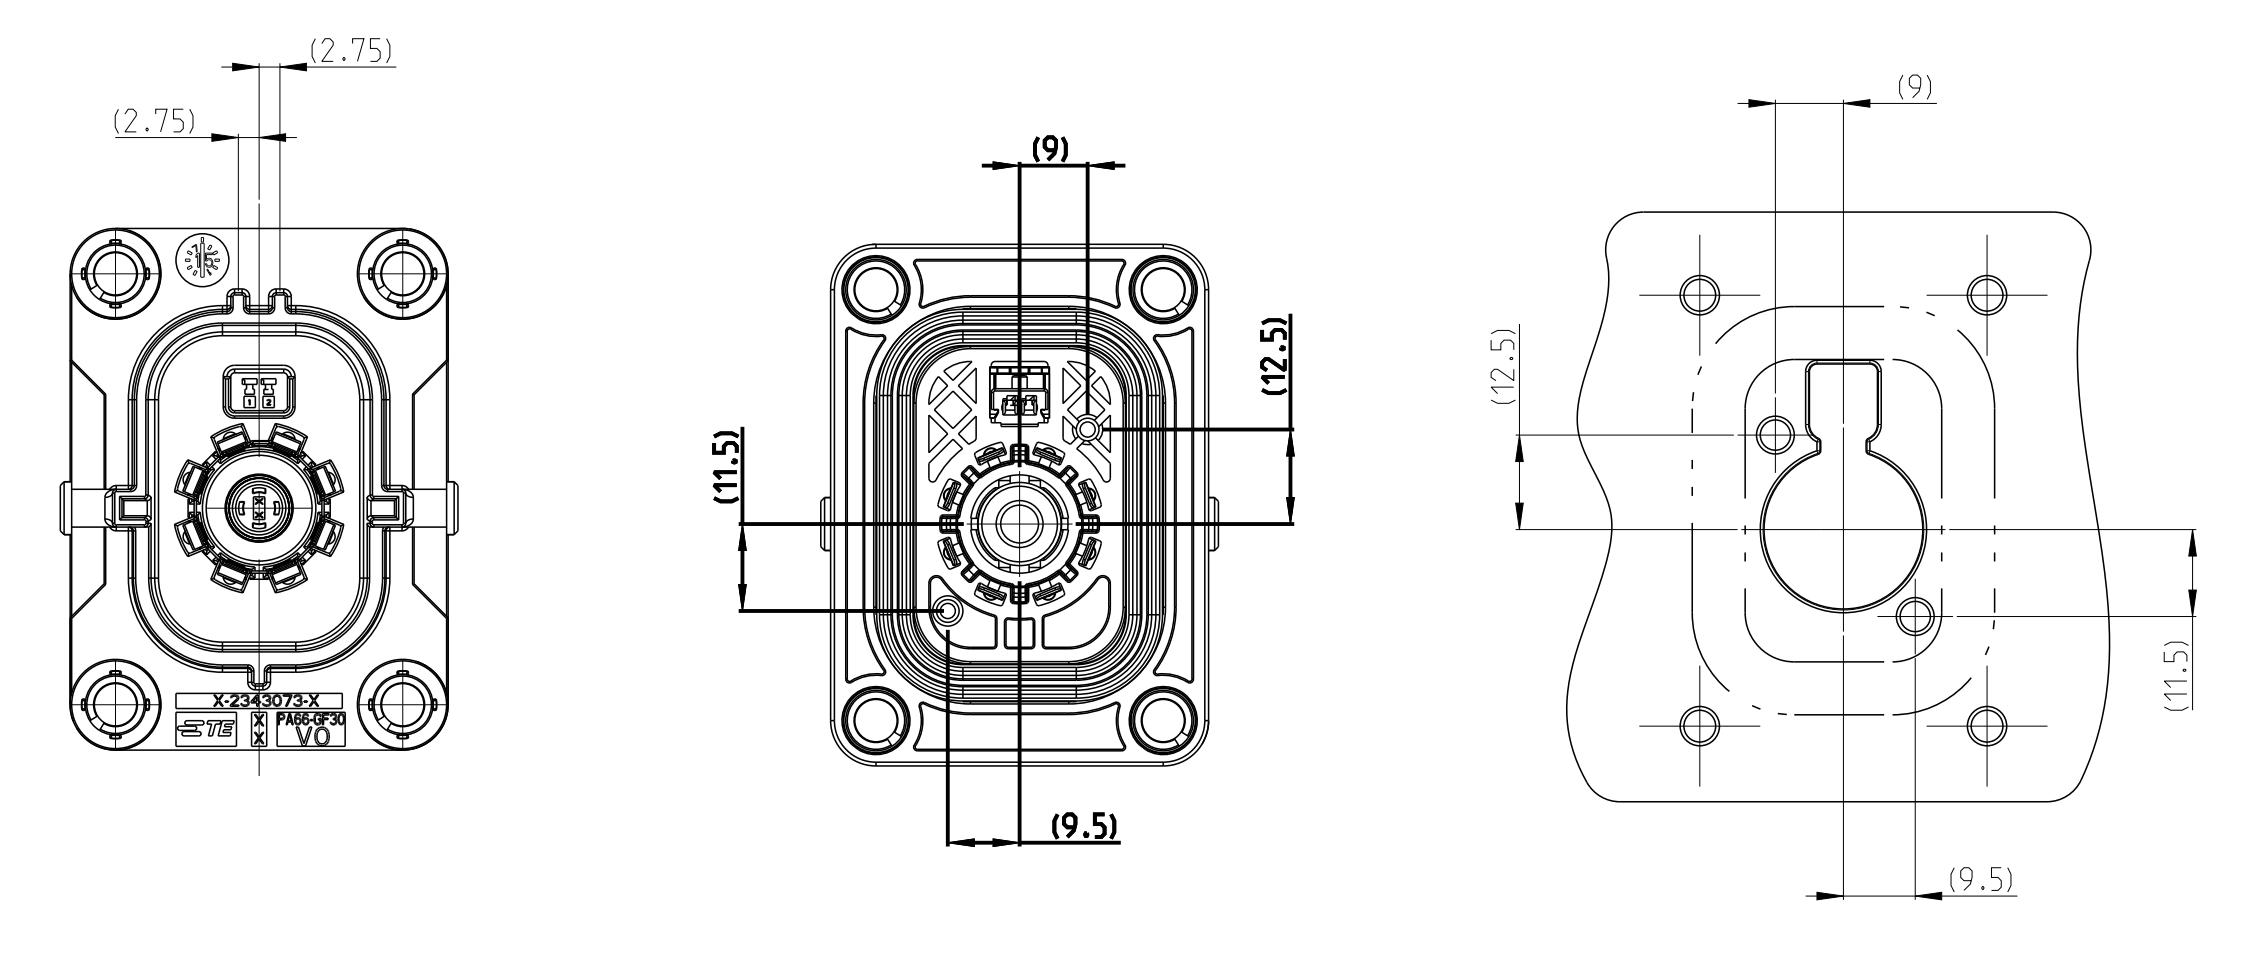


CODING A

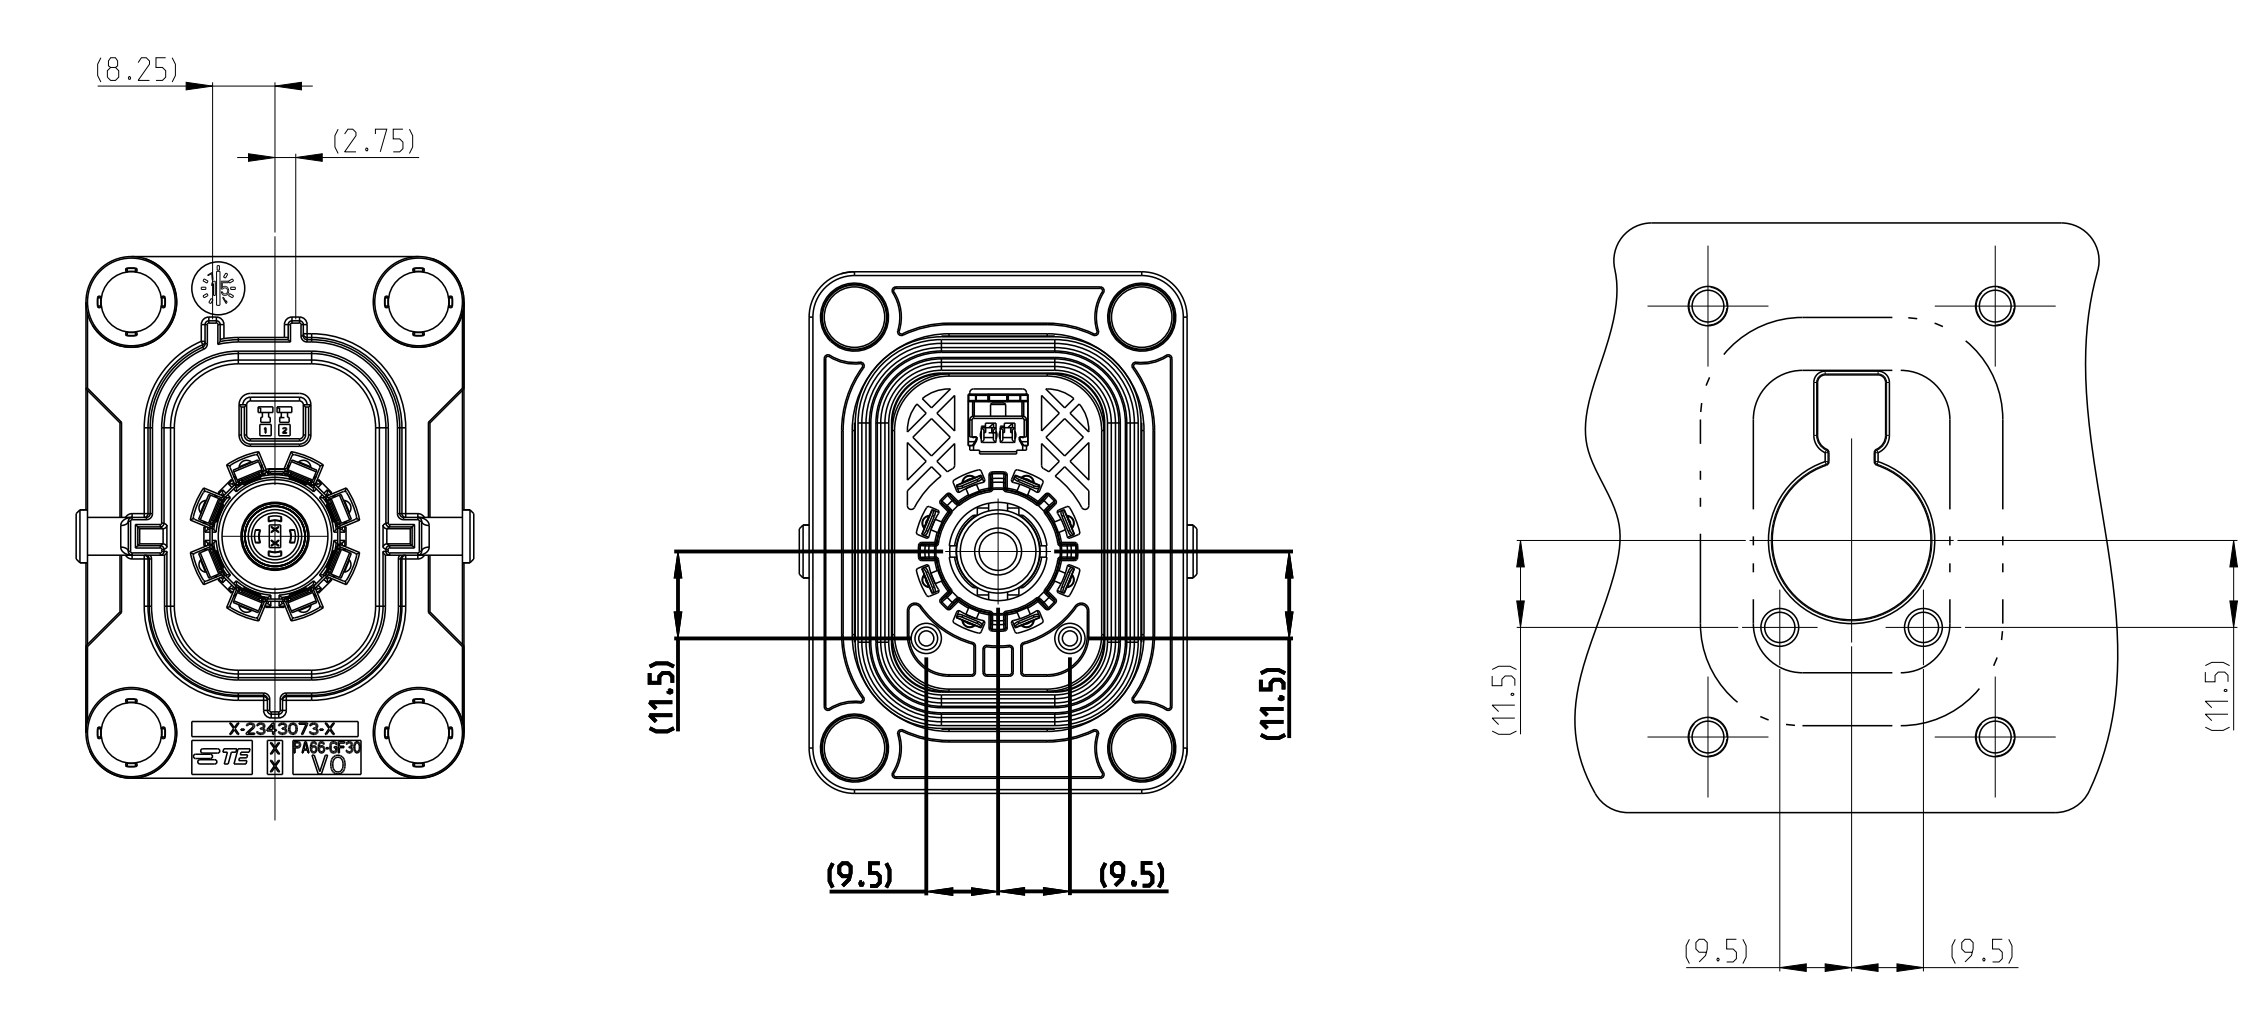


CODING D

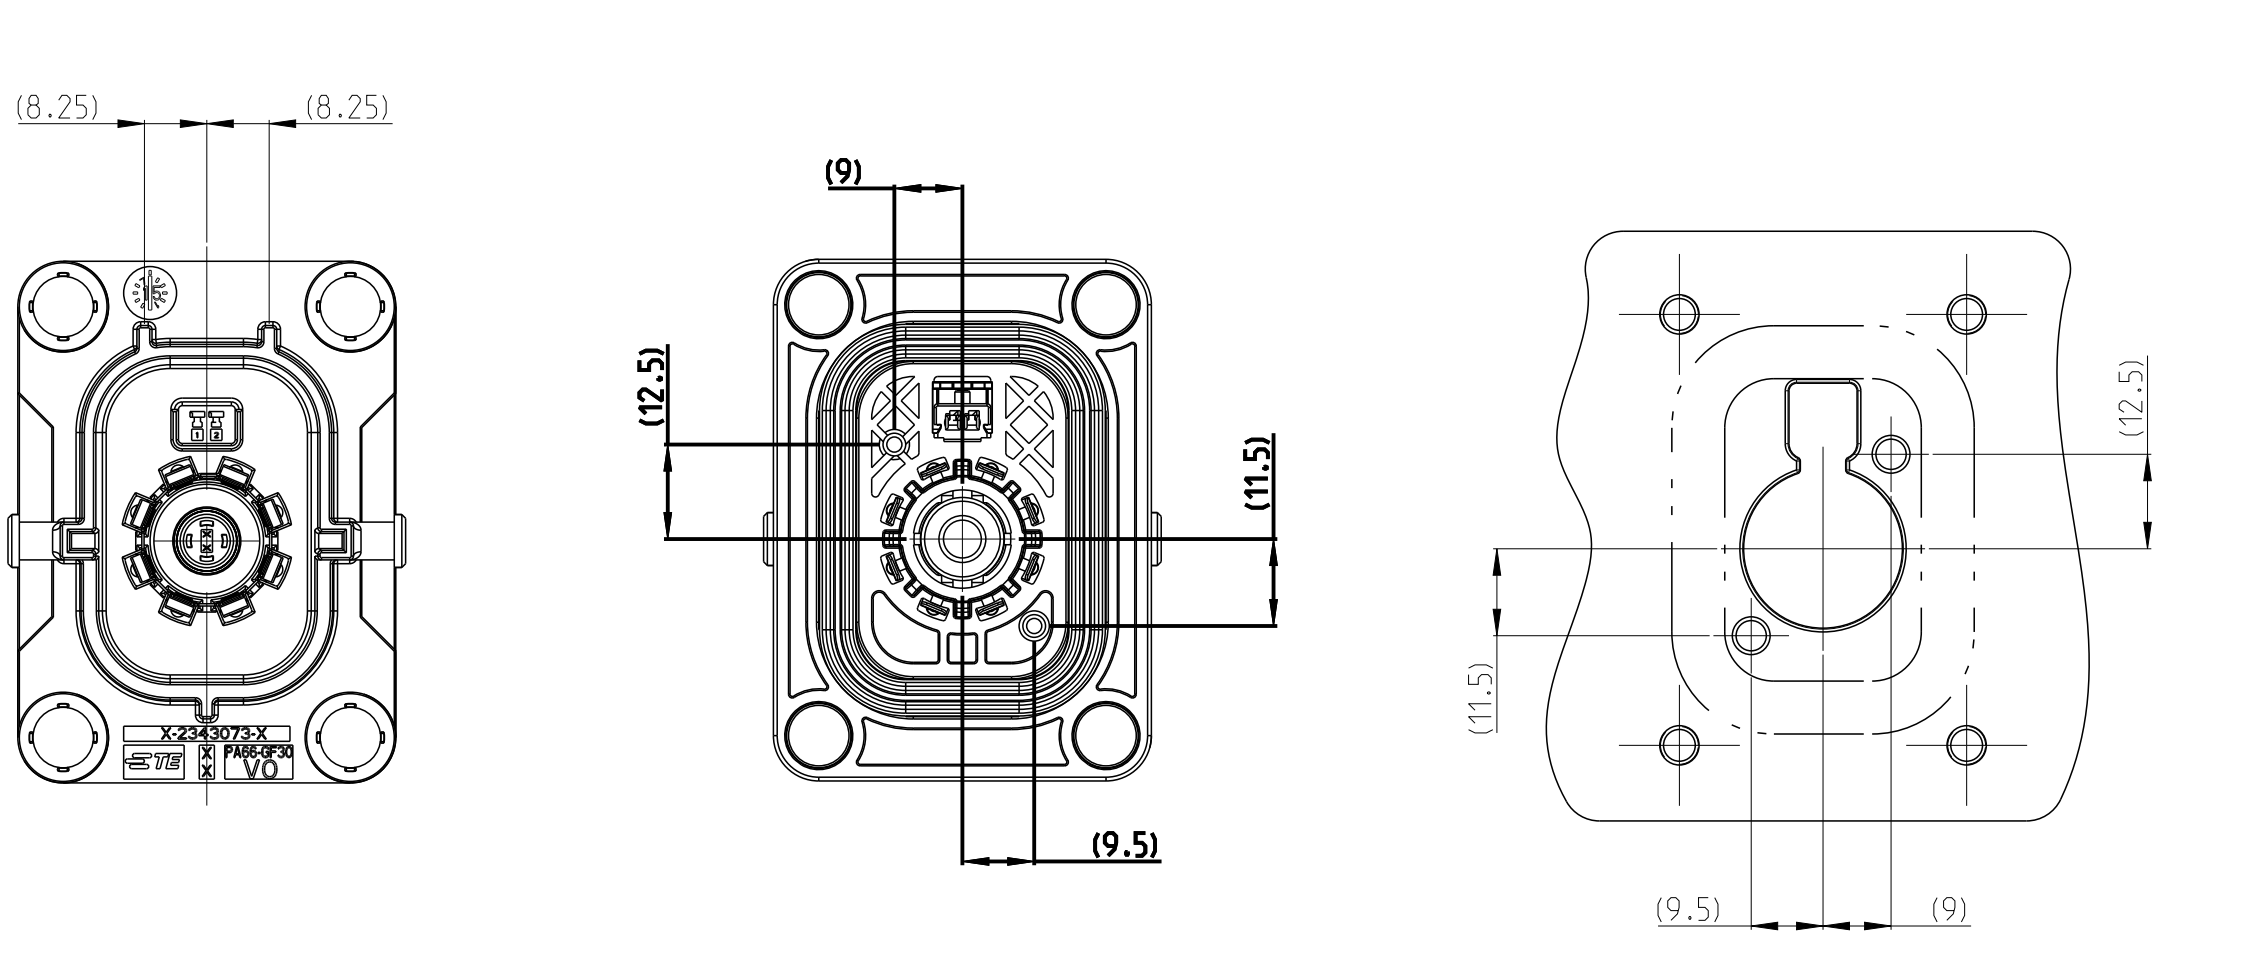


CODING B

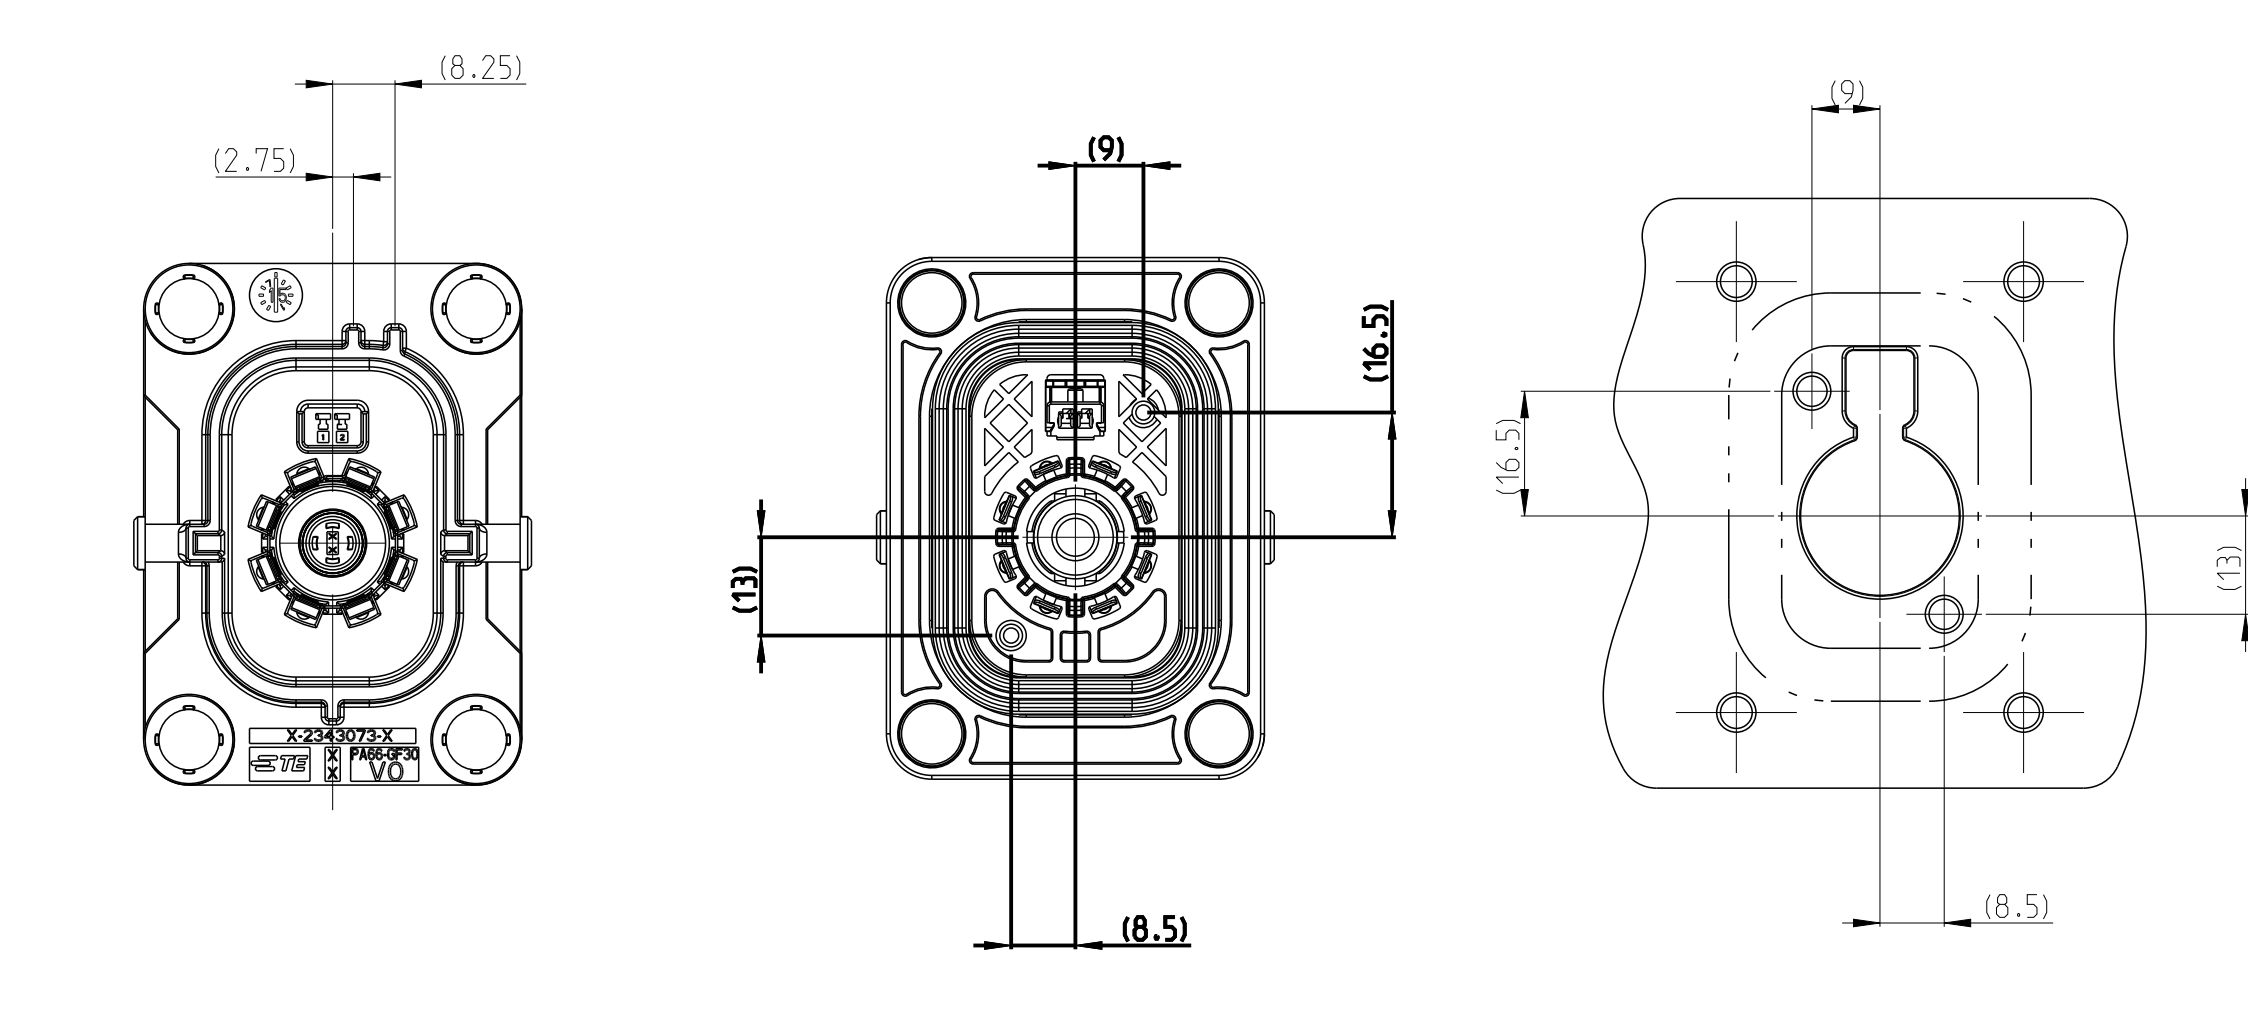



CODING E

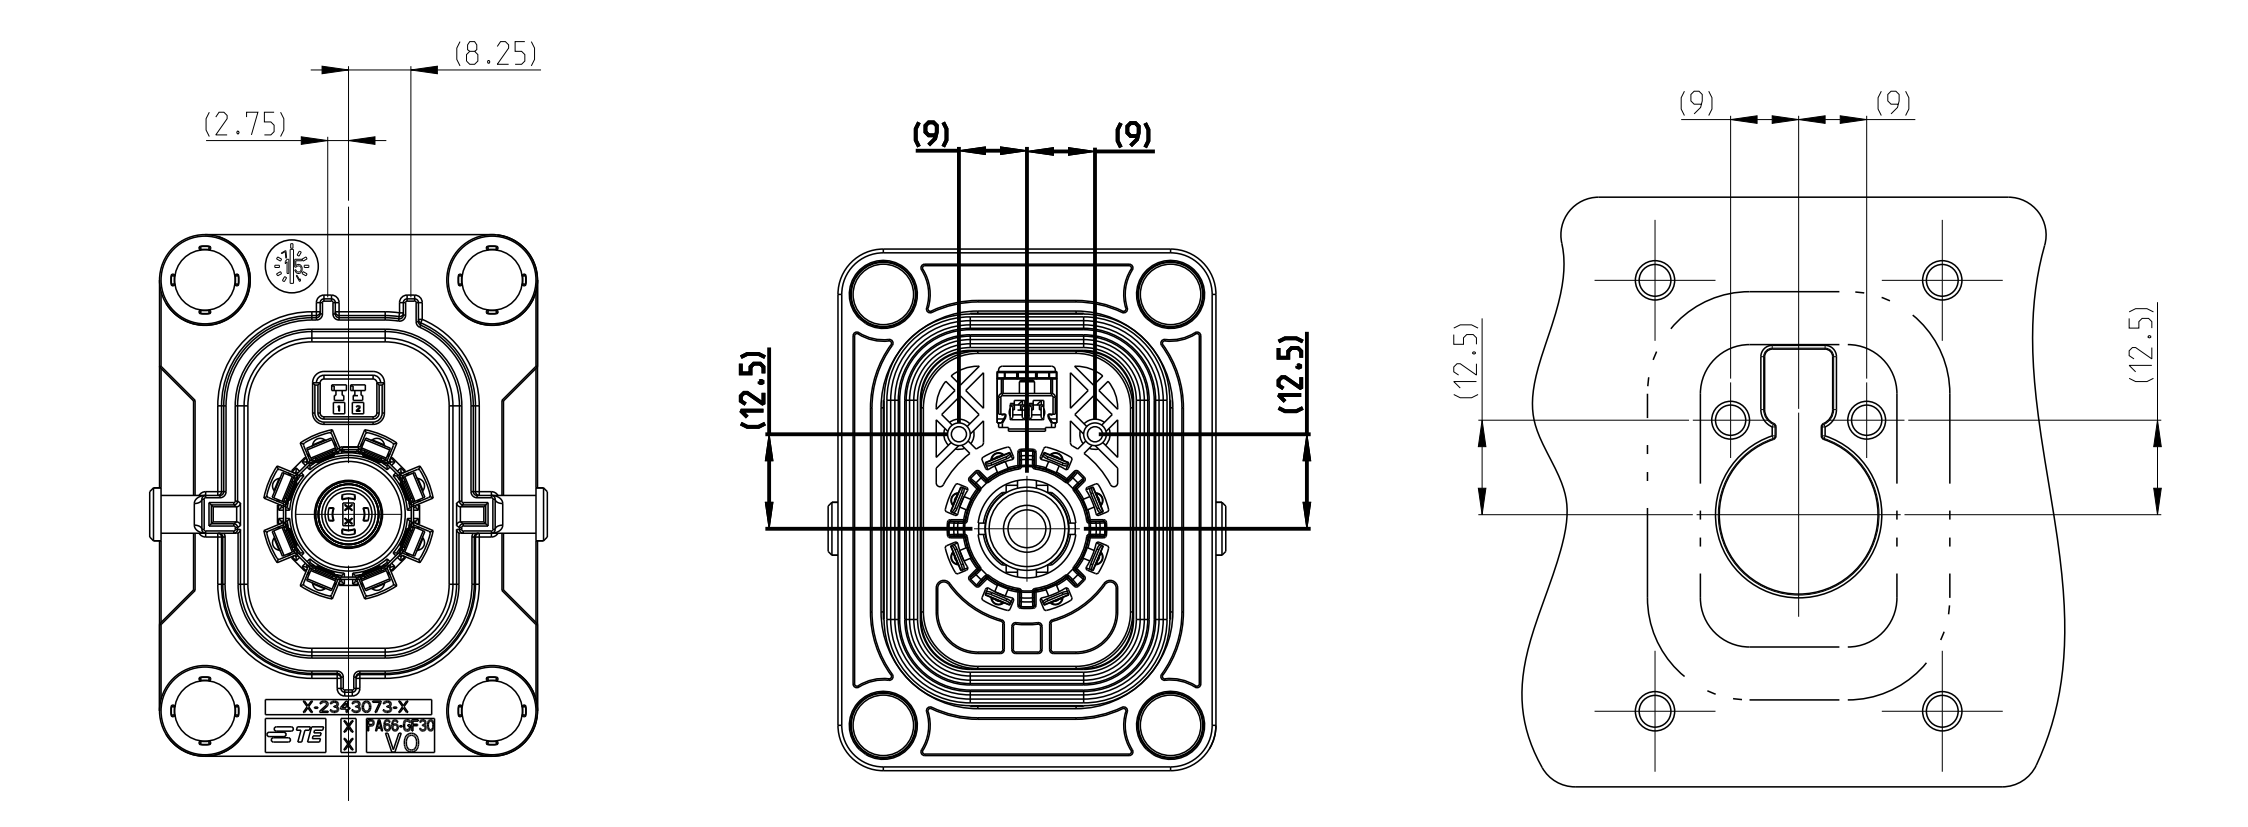

CODING C

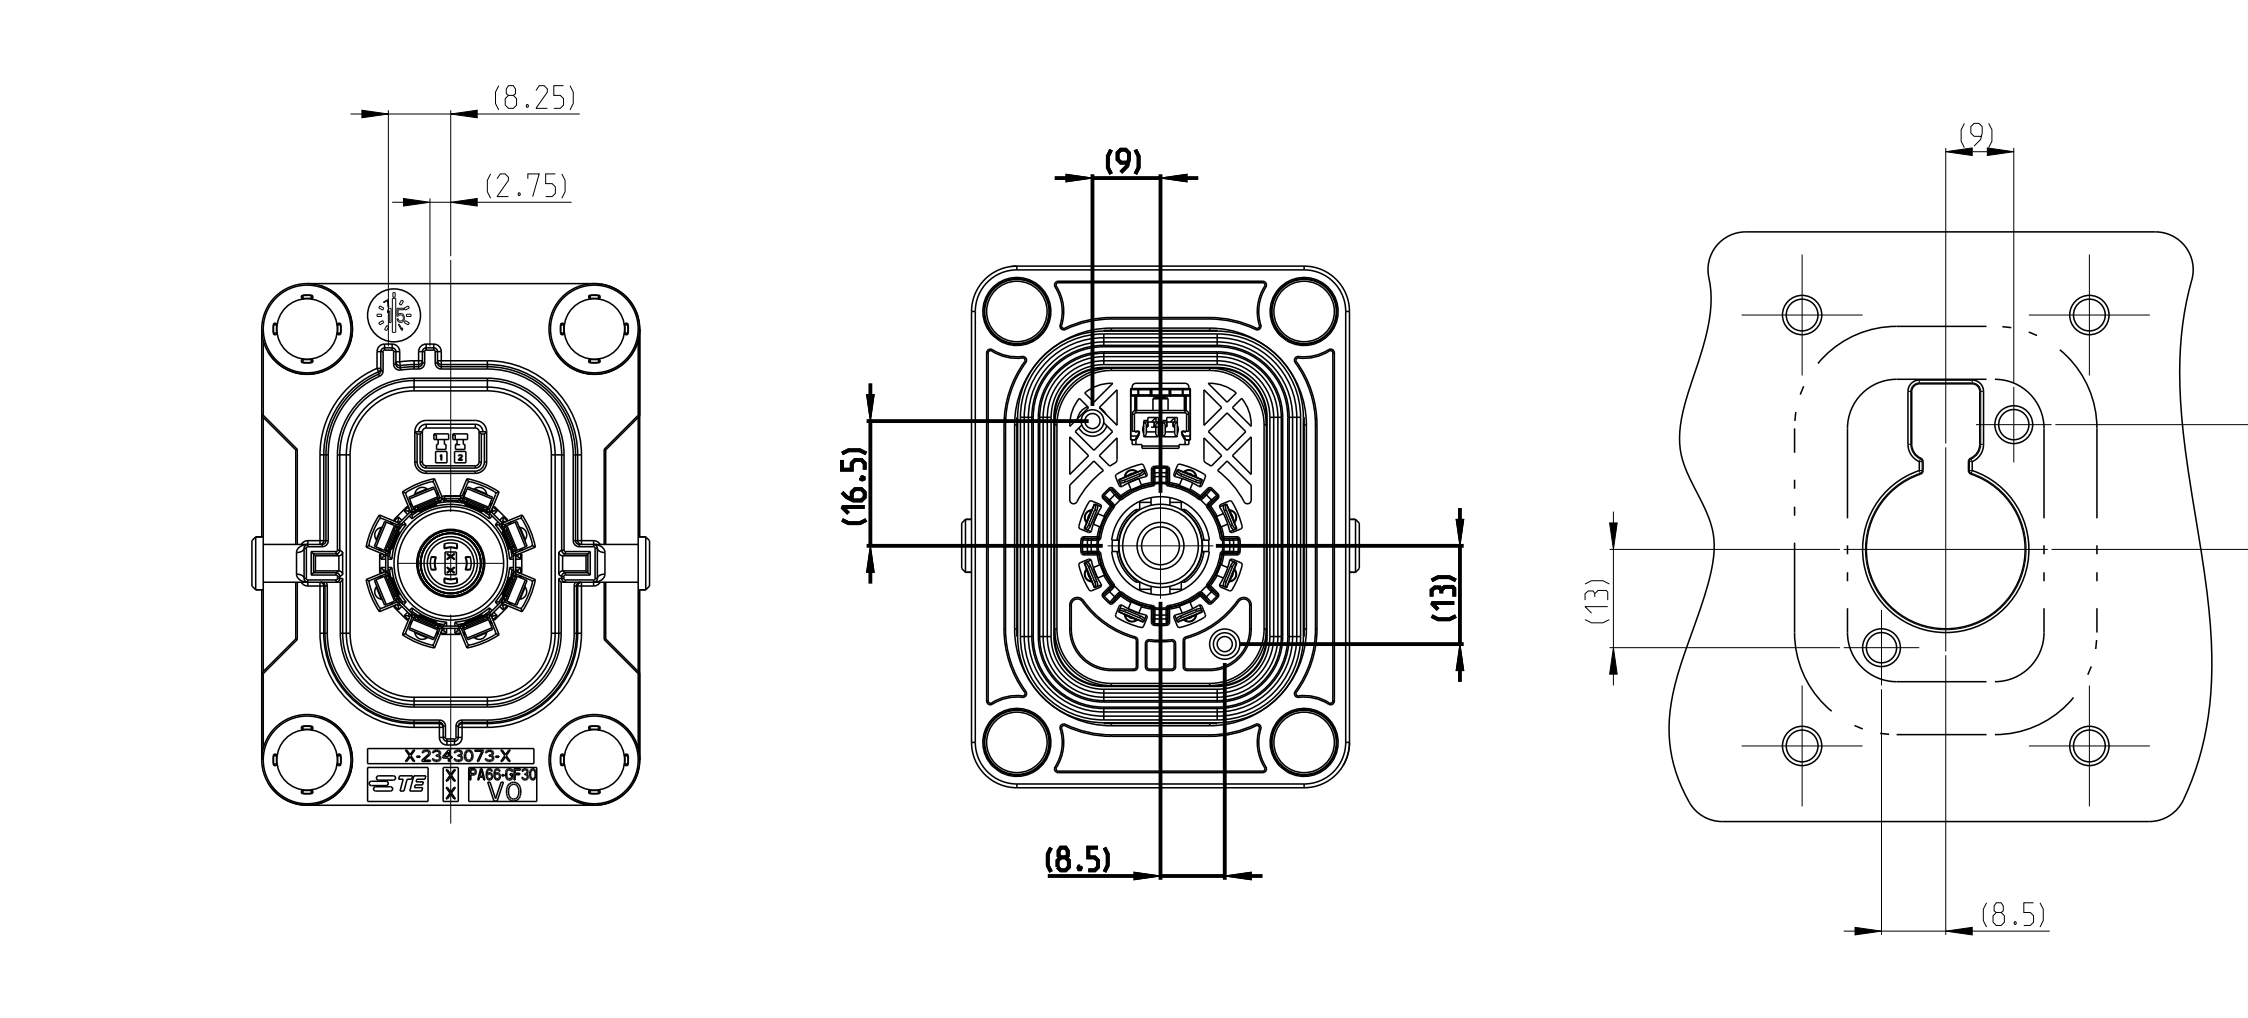

CODING F

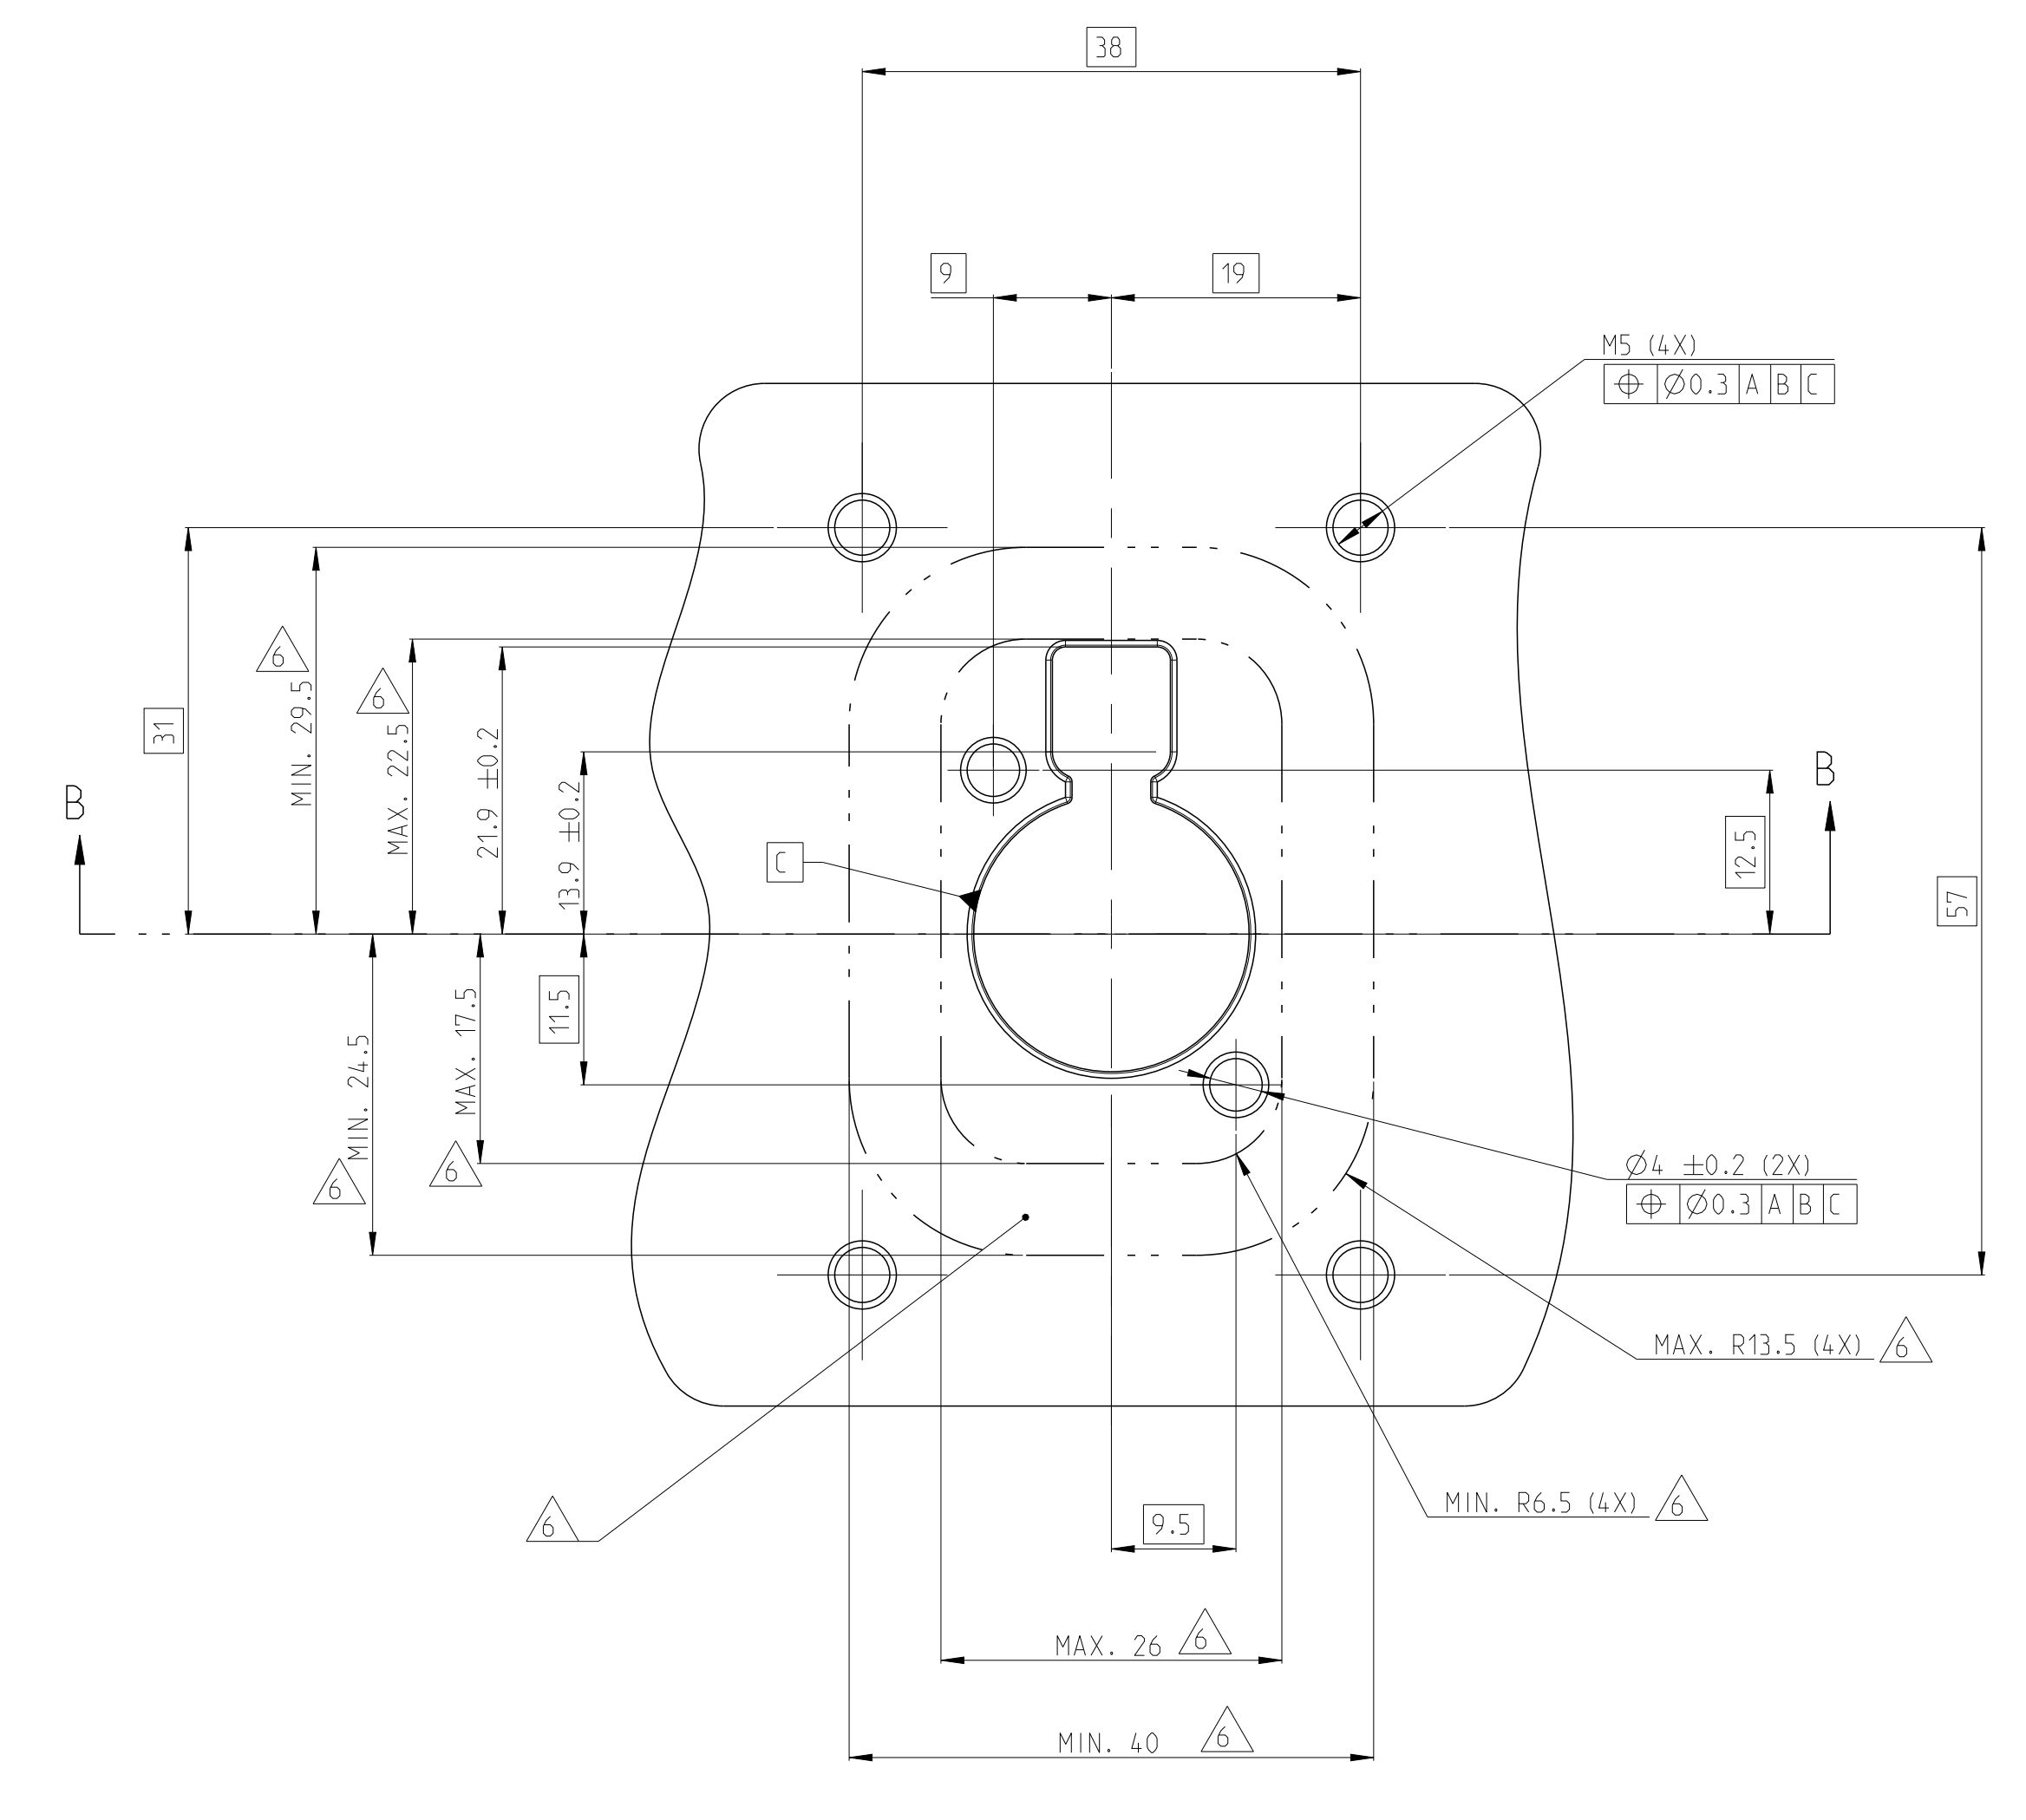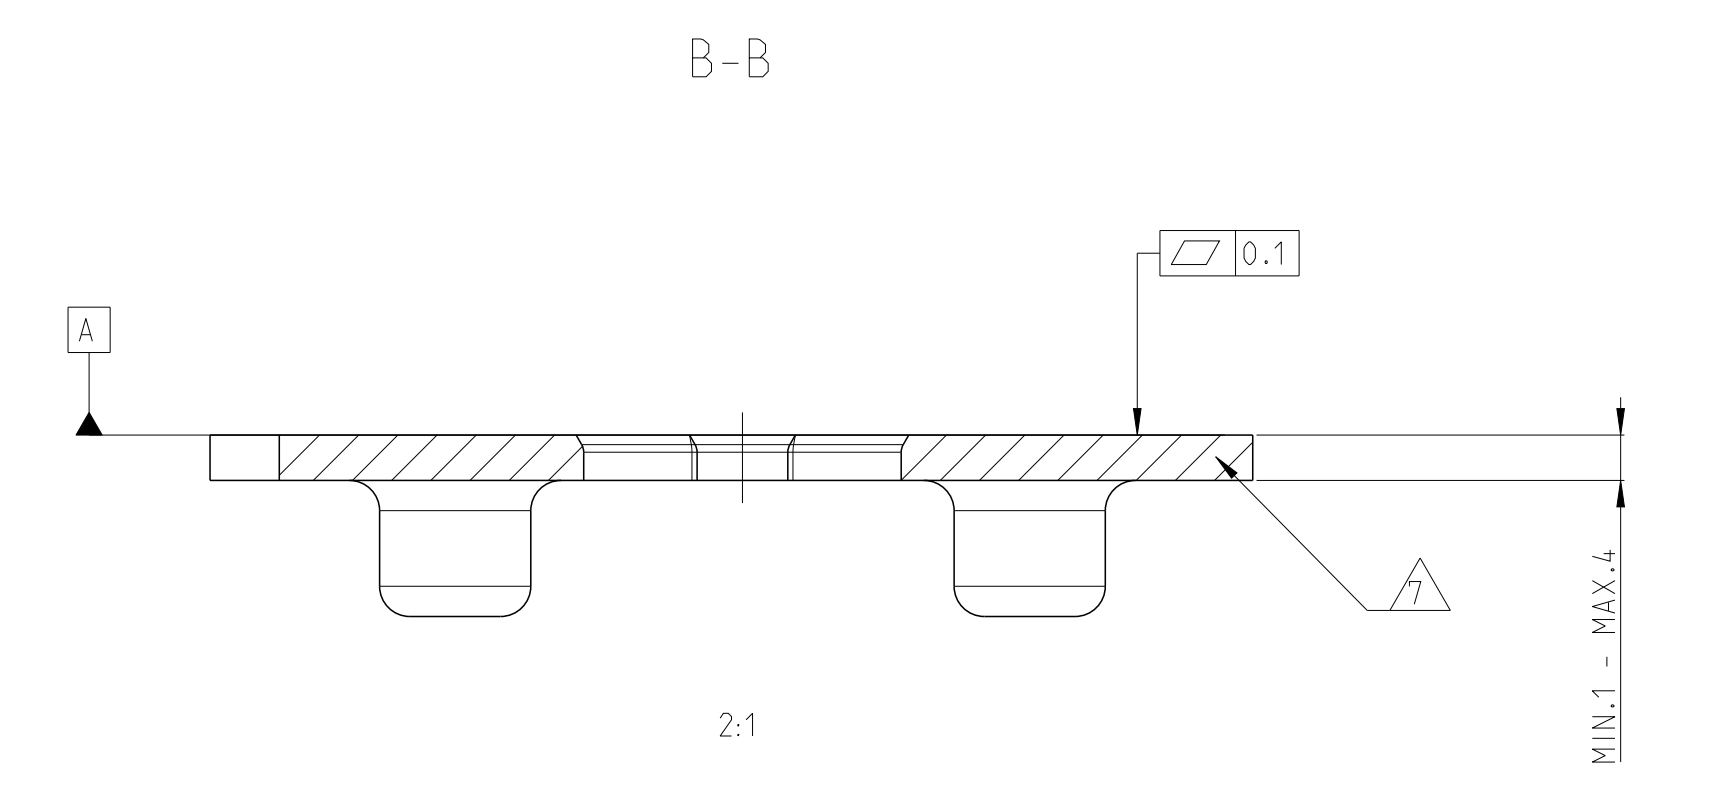

CODING A MOUNTING INTERFACE

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 21AUG2017	BY: J.L.L.	APPV: E. JIANG	DATE: 28AUG2017	REV: 1	DATE: 18SEP2017	BY: L. YIN	APPV: L. YIN	DATE: 18SEP2017	REV: 1	TE Connectivity	
DIMENSIONS: UNLESS OTHERWISE SPECIFIED:		DIM: ±0.5		TYPICAL TOLERANCES:		TYPICAL TOLERANCES:		TYPICAL TOLERANCES:		TYPICAL TOLERANCES:		NAME: P2P IP HEADER ASSY SIZE: A0 CASE CODE: - DRAWING NO: C-2324-108 SCALE: 1:1 SHEET: 3 OF 3 REV: 1	
CUSTOMER DRAWING												RESTRICTED TO	