


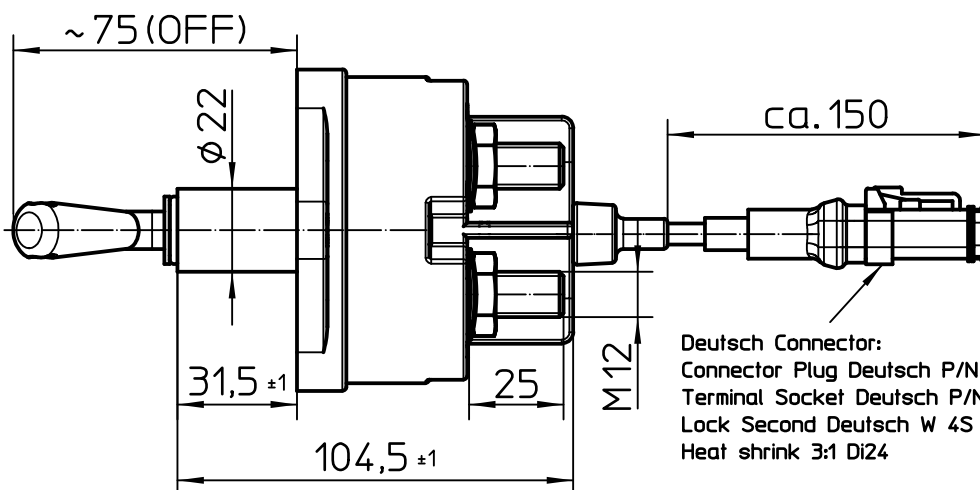


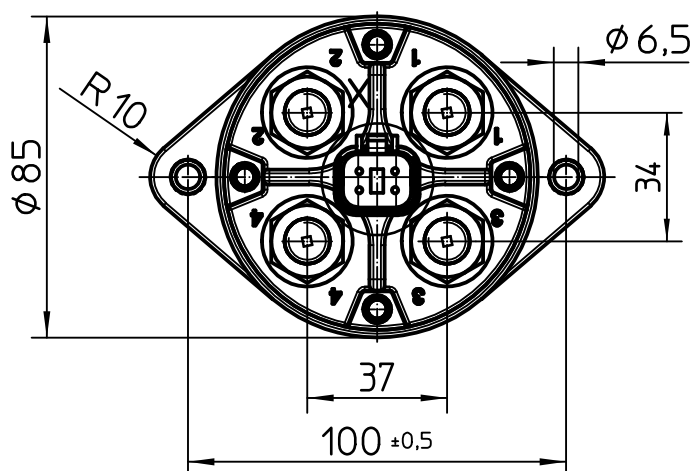

Deutsch Connector:
 Connector Plug Deutsch P/N DT06-4S-E008
 Terminal Socket Deutsch P/N 046220116141
 Lock Second Deutsch W 4S
 Heat shrink 3:1 Di24



Circuit

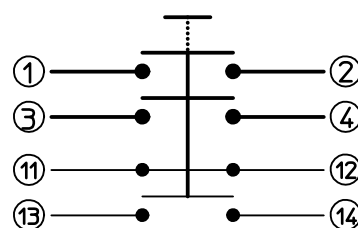


Technical Data:

Case Material: Cover Vyncolit black
 Base Plate PA GF black
 Switch Lever Material PA GF black
 Min. Insulation Resistance 100MΩ
 Dielectric Withstanding Voltage 1050V-1min.
 Max. Contact Drop During Resistive Load 150mV
 Voltage up to 32VDC
 Duty Rating 2x500A
 Overload 2x2000A-1.5min.
 2x2500A-10sec.

Auxiliary Contact:

Continuous Current: 2A
 Make and Brake: 2A

Sealing IP 67/ IEC 529
 Vibration 10G/ 18-500Hz
 Weight 750g/1.65 Pound
 Temperature Range -40°C bis +85°C
 Wire Section (at nominal Load Main Terminals) . min. 250mm²
 Switch Lever removeable
 Max. Torque (Main Terminals) 18-22Nm

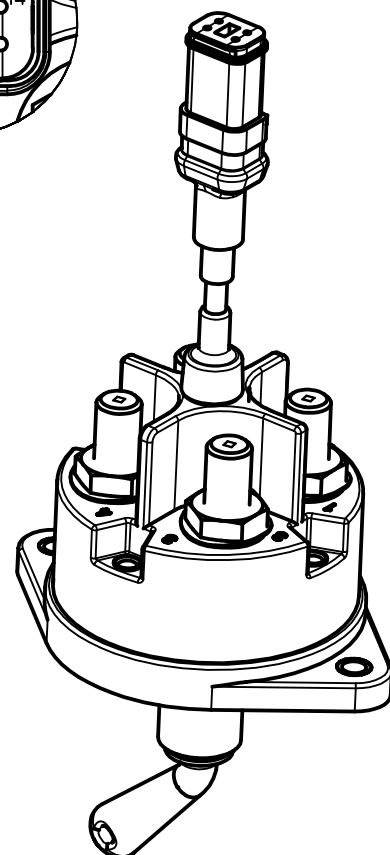

	Date	Name	mm	Scale	
Drawn	14.10.2015	Mielk		1:2	
Check	19.10.2015	Grind			
			General Tolerances		
			DIN ISO 2768 cL		



Elektrotechnik - GmbH & Co KG
 D - 72218 Wildberg

Drawing No:

35-521-220-S-A2

NSN: