

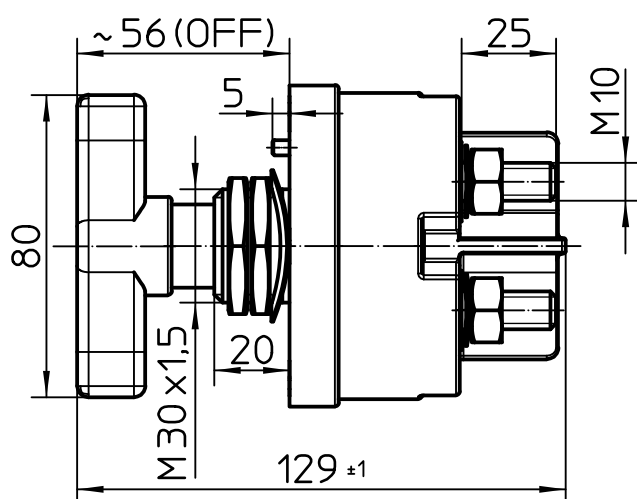
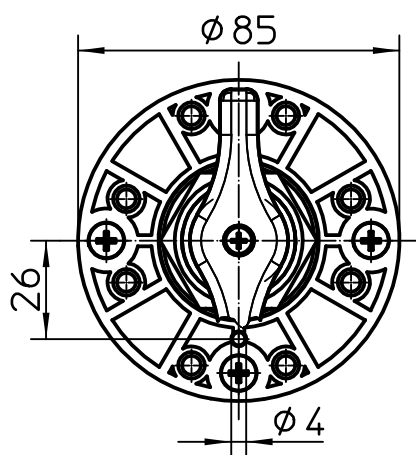
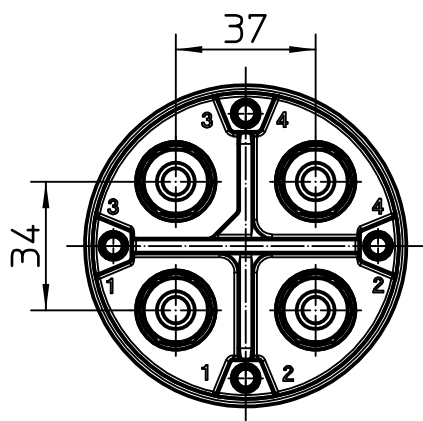


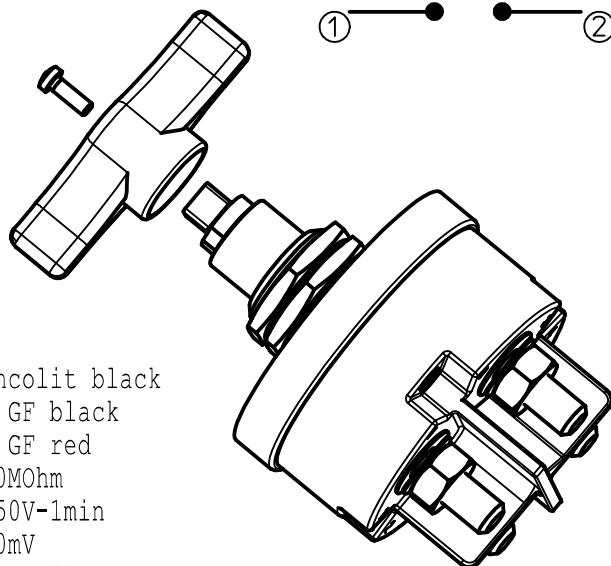

Schaltbild



Technical Data:

Case Material: Cover:.....Vyncolit black
 Base Plate:.....PA GF black
 Switch Lever Material:.....PA GF red
 Min. Insulation Resistance:.....100MΩ
 Dielectric Withstanding Voltage:.....1050V-1min
 Max. Contact Voltage Drop:.....150mV
 Voltage:.....up to 32VDC
 Continuous Rating:.....2x500A
 Overload:.....2x2000A-1.5min
2x2850A-20s
 5 Cycle Intermittend Rating2x2500A 20s ON
3,5min OFF
 Sealing:.....IP 67/IEC 529
 Vibration:.....10G 18-500Hz
 Weight:.....860g / 1.9Pound
 Temperature Range:.....-40°C to +85°C
 Wire Section(at nominal load):.....min.2x250mm²
 Key:.....not removeable
 Max. Tourque (Main Contacts)15-20Nm

	Date	Name	mm	Scale
Drawn	08.02.2012	Mielk		1:2
Check	08.02.2012	Grind	General Tolerances	DIN ISO 2768 cL



Drawing No:

35-523-141-R

NSN.: