


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
EH		H		REV PER ECN 0B10-0035-95	10MAY95	MKB	RS
		J		REV PER ECN 0B10-0075-95	10JUL95	MKB	RS
		K		REV PER ECN 0B10-0102-95	09AUG95	MKB	RS
		L		REV PER ECN 0B10-0122-95	06SEP95	MKB	RS
		M		REV PER ECN 0B10-0130-95	13SEP95	LMH	RS
		N		REV PER ECN 0B10-0086-96	19MAR96	LMH	RS
		P		REV PER ECN 0B10-0143-98	07JUL98	LMH	RS
		P1		REVISED PER ECO-09-022178	21SEP09	KK	AEG

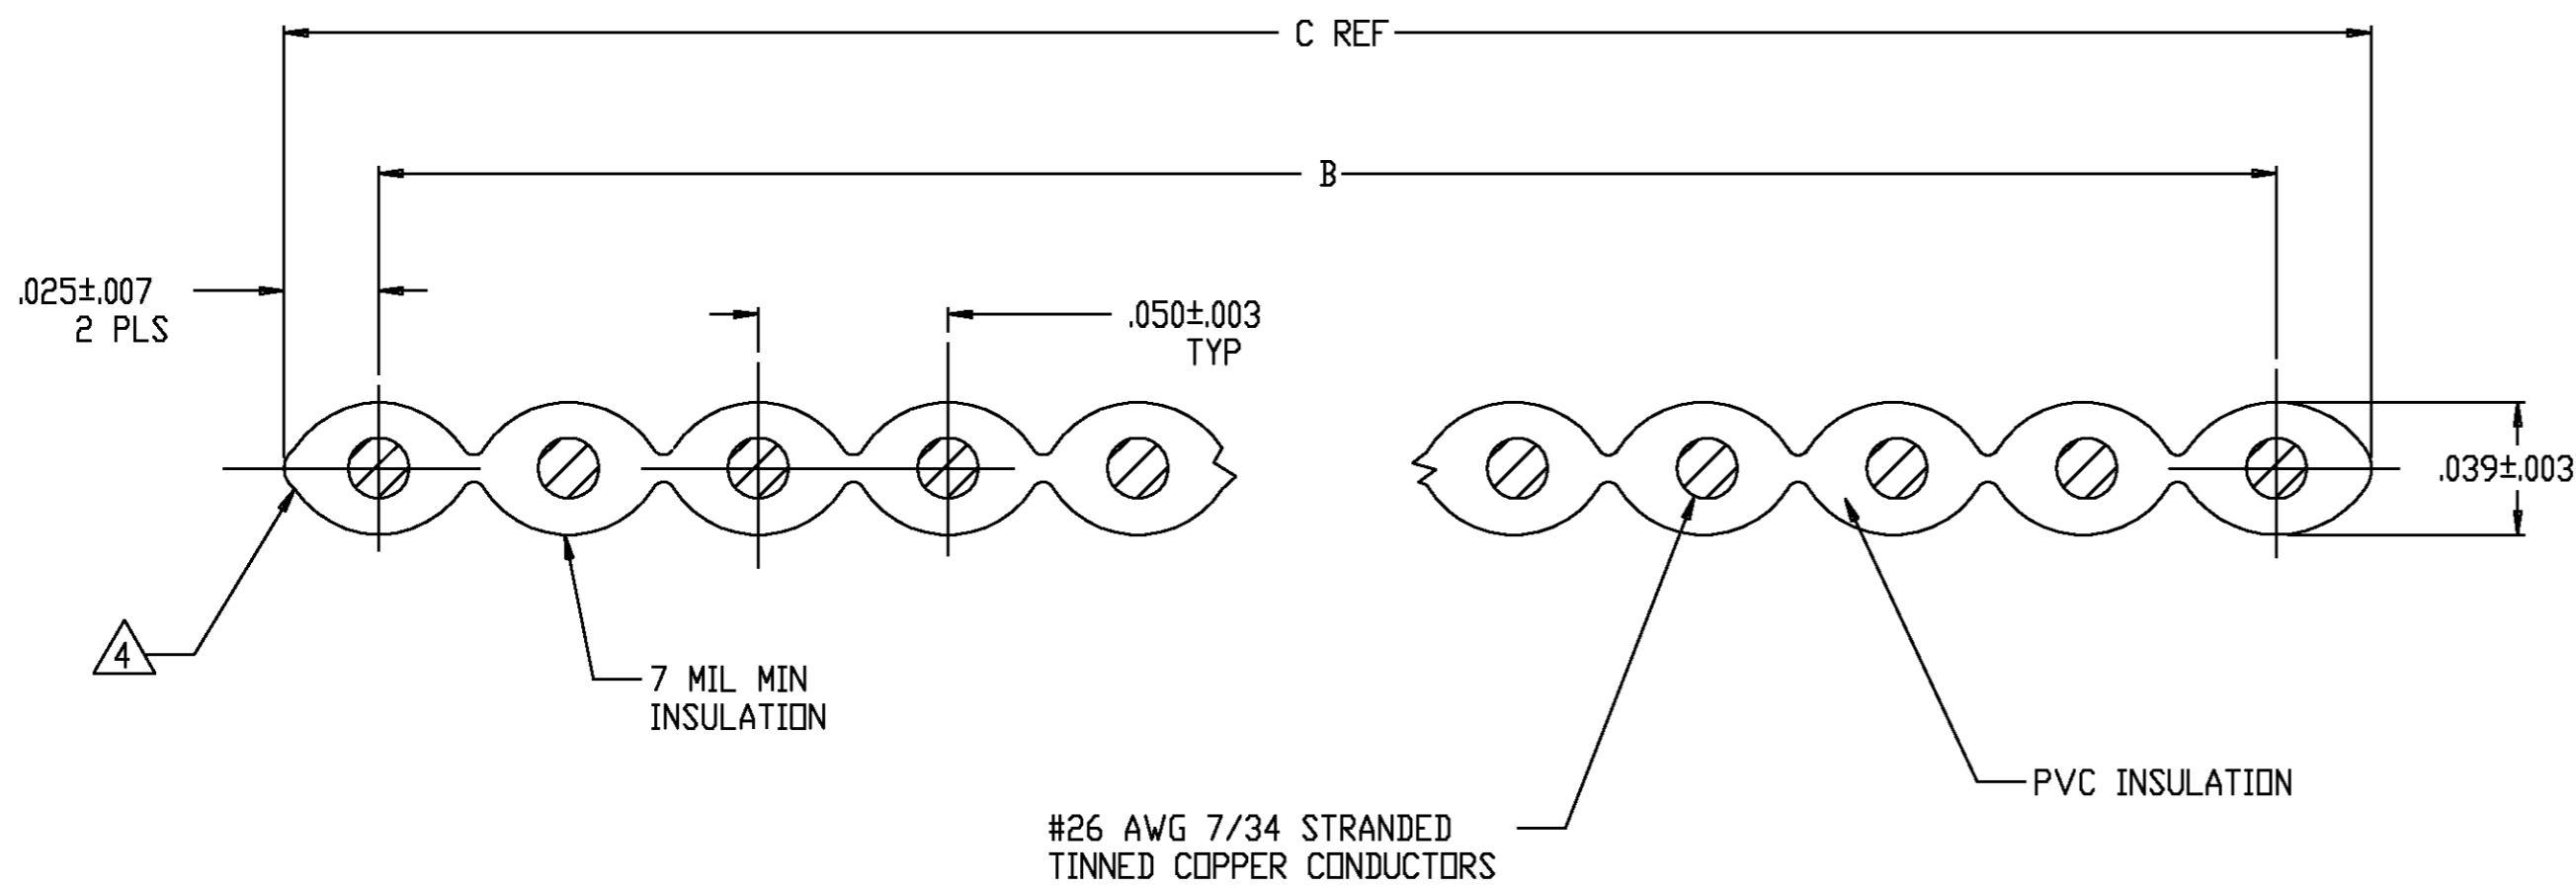

FLAT CABLE CROSS-SECTION

- CABLE CERTIFIED TO:
 - UL CABLE STYLE: 2651
 - CSA: CSA AWM IA 105°C 300V FT1
 - CABLE PHYSICAL SPECIFICATIONS:
 - TEMPERATURE RATING: 105°C
 - FLAMMABILITY:
 - UL: VW1
 - INSULATION: GRAY FLAME RETARDANT FLEXIBLE PVC
 - CONDUCTORS: 26 AWG 7/34 STRANDED TINNED COPPER
 - TYPICAL ELECTRICAL VALUES:
 - VOLTAGE RATING: 300 V
 - INSULATION RESISTANCE: 10,000 MEGOHMS/10 FT
 - IMPEDANCE: 89 OHMS NOMINAL (GND-SIG-GND)
 - CAPACITANCE: 16.2 pf/FT
 - PROPAGATION DELAY: 1.44 ns/FT
 - REEL QUANTITY: 500 FT REEL MAY CONTAIN SEPARATE LENGTHS
20 FT MIN PER LENGTH, TWO LENGTHS MAX PER REEL
 - CABLE SURFACE PRINTED PER UL AND CSA REQUIREMENTS.
- 4 RED EDGE MARK ON CONDUCTOR #1.
7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

7	OBSOLETE	DIM C	DIM B	NO OF COND	PART NUMBER
		.900	.850±.010	18	3-57034-0
		1.500	1.450±.010	30	2-57034-9
	7 OBSOLETE	.600	.550±.010	12	2-57034-0
		.400	.350±.010	8	2-57034-7
		2.200	2.150±.015	44	2-57034-6
		3.200	3.150±.015	64	2-57034-5
		.200	.150±.010	4	1-57034-9
		3.000	2.950±.015	60	1-57034-6
		2.500	2.450±.015	50	1-57034-5
		2.000	1.950±.015	40	1-57034-4
		1.850	1.800±.015	37	1-57034-3
	7 OBSOLETE	1.800	1.750±.015	36	1-57034-2
		1.700	1.650±.010	34	1-57034-1
		1.300	1.250±.010	26	1-57034-0
		1.250	1.200±.010	25	57034-9
		1.200	1.150±.010	24	57034-8
		1.000	.950±.010	20	57034-7
		.800	.750±.010	16	57034-6
		.750	.700±.010	15	57034-5
		.700	.650±.010	14	57034-4
		.500	.450±.010	10	57034-3
		.450	.400±.010	9	57034-2
		.300	.250±.010	6	57034-1
		DIM C	DIM B	NO OF COND	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.KOPPENHEFFER 03JUN92	AMP Incorporated Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK W.HARRIS 05JUN92	AMP	
	0 PLC ±	APVD W.HARRIS 05JUN92	CABLE, PLANAR RIBBON, 26 AWG, 7/34 STRANDED	
	1 PLC ±.1	PRODUCT SPEC	SIZE A2	CAGE CODE 00779
	2 PLC ±.02	APPLICATION SPEC	DRAWING NO C=57034	RESTRICTED TO -
	3 PLC ±.005		SCALE NTS	SHEET 1 OF 1
	4 PLC ±.0005			REV P1
	ANGLES ±			
MATERIAL	FINISH	WEIGHT	CUSTOMER DRAWING	