

REV. C
DCO 301385


TOLERANCES $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
RESISTANCE 400 OHMS $\pm 10\%$
NOMINAL VOLTAGE 28 VDC
MUST OPERATE 13.5 VDC MAX.
TRANSIENT SUPPRESSION - 42 VDC MAX.
MUST RELEASE 5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT: 10 55 0.06" DA
55 500 10 g's
VIBRATION 500 Hz TO 3000 Hz @ 20 g's
SHOCK 50 g's 11 MS. DURATION
TEMPERATURE -70 °C TO +125 °C

NOTES: OPERATE, RELEASE 6 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.
CONTACT BOUNCE 1 MS MAX.
CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

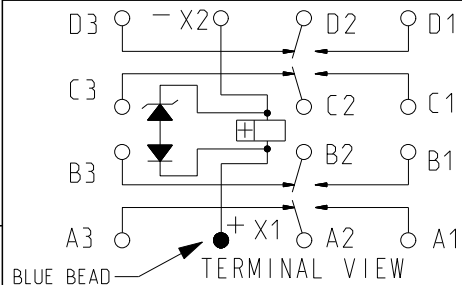

CONTACT RATING: LOW LEVEL
5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE
100,000 OPERATIONS

DR. R.F. 25APR2011 | CK. M.B. 26APR2011



CUST. QPL
CUST. NO. M83536/6-025M REV.

TE NUMBER
8-1617760-6

CII PART NUMBER
FCB-405-0625M