

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	E	See ECO-19-004147	3/22/19	J.B	T.L

QS1500
Polyolefin, Flexible,
Adhesive Lined,
Heat - Shrinkable Tubing

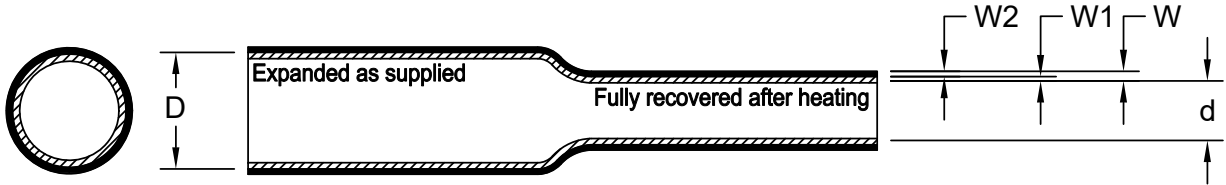


Table 1: Dimensions mm (inches)

Size	As Supplied		As Recovered							
	Minimum Expanded I.D. Including Core (D)		Maximum Recovered I.D. Including Core (d)		Minimum Recovered Jacket Wall (W2)		Nominal Recovered Adhesive Wall (W1)		Nominal Recovered Total Wall (W)	
	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.
No. 1	5.72	0.225	1.27	0.050	0.64	0.025	0.56	0.022	1.20	0.047
No. 2	7.62	0.300	1.65	0.065	0.76	0.030	0.76	0.030	1.52	0.060
No. 3	11.55	0.455	2.41	0.095	0.89	0.035	1.02	0.040	1.91	0.075
No. 4	17.78	0.700	4.45	0.175	1.04	0.041	1.37	0.054	2.41	0.095
No. 5	27.94	1.100	7.62	0.300	1.93	0.076	1.57	0.062	3.51	0.138

Material: Fabricated from flame-retarded crosslinked modified flexible polyolefin, with a thermoplastic adhesive liner.

Color: Jacket color is black or red. Adhesive liner shall be amber.

Reference Specification TEC-108-120016

THIS DRAWING IS UNPUBLISHED.
 ALL RIGHTS RESERVED.
 © COPYRIGHT 2019 TE Connectivity

DIMENSIONS: INCHES	DWN J. Bitter	12MAR2019	MATERIAL	-	FINISH	-	
	CHK Tim Licko	-	TE Connectivity Ltd.				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	APVD Tim Licko	-					NAME QS1500 Polyolefin, flexible, Adhesive Lined, Heat - shrinkable Tubing
	PRODUCT SPEC	-	SIZE	A4	CAGE CODE	06090	
	APPLICATION SPEC	-	DRAWING NO	C= QS1500		RESTRICTED TO	-
	WEIGHT	-	CUSTOMER DRAWING				
			SCALE	None	SHEET	1 OF 1	
					REV	E	