


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	B	REVISED PER ECN-24-251860	12FEB2024	MM CR

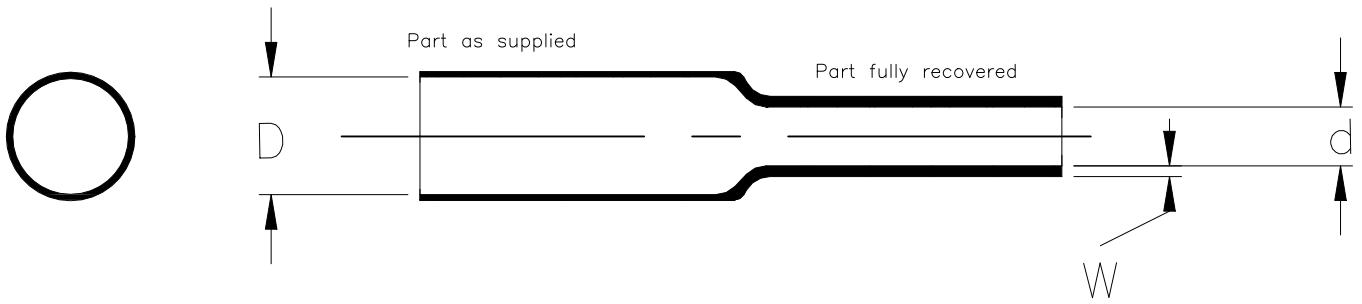

SIZE	ID ϕ AS SUPPLIED	ID ϕ AS RECOVERED	RECOVERED WALL THICKNESS
	D MINIMUM	d MAXIMUM	AFTER HEATING (NOM)
1/4	6.35 (.250)	3.18 (.125)	0.89 (.035)
3/8	9.53 (.375)	4.75 (.187)	0.89 (.035)
1/2	12.70 (.500)	6.35 (.250)	0.89 (.035)
5/8	15.87 (.625)	7.95 (.312)	1.07 (.042)
3/4	19.05 (.750)	9.53 (.375)	1.07 (.042)
7/8	22.22 (.875)	11.09 (.437)	1.14 (.045)
1	25.40 (1.000)	12.70 (.500)	1.24 (.049)
1 1/4	31.75 (1.250)	15.87 (.625)	1.40 (.055)
1 1/2	38.10 (1.500)	19.05 (.750)	1.40 (.055)
2	50.80 (2.000)	25.40 (1.000)	1.65 (.065)
2 1/2	63.50 (2.500)	31.75 (1.250)	1.65 (.065)
3	76.20 (3.000)	38.10 (1.500)	1.65 (.065)

NOTES:

1. THIS PRODUCT IS DESIGNED FOR A WIDE RANGE OF APPLICATIONS, AND MEETS THE PERFORMANCE REQUIREMENTS OF TE SPECIFICATION RT-1148.
2. PACKAGED AND SUPPLIED ON A SPOOL AND LABELED WITH (example: VPB-3/8-0), PART NUMBERING SYSTEM: VPB= PART NUMBER, 3/8= ORDER SIZE, -0= BLACK (STANDARD COLOR).
3. ALWAYS ORDER THE LARGEST SIZE THAT WILL SHRINK SNUGLY OVER THE COMPONENT TO BE COVERED.
4. FOR MATERIAL AND FINISH INFORMATION REFER TO RT-1148 SPECIFICATION. FOR SPECIAL ORDER SIZES, CONTACT TE CONNECTIVITY.

TE Connectivity. All Rights Reserved.



DIMENSIONS: INCHES	DWN M MAZARIEGOS	12FEB2024	MATERIAL	-	FINISH	-
	CHK H CALILONG	12FEB2024				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD C REEDER	12FEB2024				
0 PLC ± -	PRODUCT SPEC	-	NAME	VPB TUBING, HEAT-SHRINKABLE FLEXIBLE, ABRASION RESISTANT		
1 PLC ± -	-	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -	APPLICATION SPEC	-	A4	06090	C-VPB	-
3 PLC ± -	-	-	WEIGHT	0	CUSTOMER DRAWING	
4 PLC ± -	-	-	SCALE	DNS	SHEET	1 OF 1
ANGLES ± -	-	-	REV		B	