


LOAD BREAK DISCONNECT BOXES

DISCONNECT SWITCH RATED FOR 1500 VDC AND 400/500A

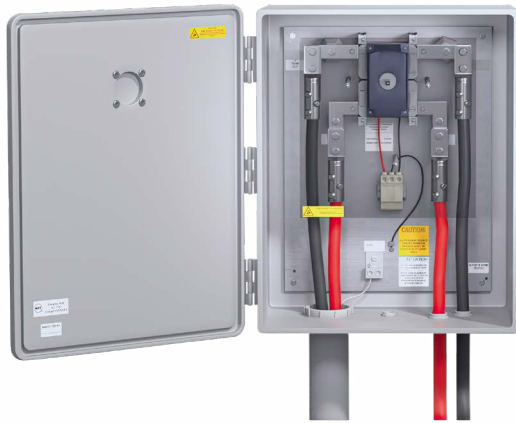

Provide DC circuit isolation that complies with UL standards, designed for safety and reliability.

APPLICATIONS

- Utility-scale Solar Projects
- Community & Industrial Solar Projects

RELEVANT STANDARDS AND TEST REPORTS

- UL1741 Compliant
- NEMA 4X Rated

KEY FEATURES

- Up to 4 inputs per disconnect box
- Range of input/output conductors up to 500-1000 kcmil
- Arc flash safety shield
- DC output cable termination hardware included
- 100% customizable
- Every box is 100% tested prior to shipment

TE Connectivity (TE) Solar Load Break Disconnect LBD boxes are engineered to deliver high performance and reliability within trunk bus DC collection systems. They provide a safe point to isolate sections of the system for routine maintenance, troubleshooting, or repair without disrupting the entire solar array. This helps ensure the continued operation of unaffected parts of the system.

Our LBD boxes help reduce the complexity and cost of electrical infrastructure by providing disconnecting/isolation. This approach also simplifies the system layout and lowers installation costs. They pair with TE Shear Bolts for an easier and faster installation without bending the trunk cable.

They are NEMA4X rated to withstand harsh outdoor environments for long-lasting performance. The input and output conduit holes are configurable based on each project's needs and can fit up to 1000 kcmil trunk cable.

DESIGN INFORMATION

Maximum System Voltage	1500 VDC
Output Current	400A or 500A
Input Current	400A or 500A
No. of Inputs	Up to 4
Enclosure Rating	NEMA4X
Enclosure Material	Fiberglass
Ambient Temperature Range	-30°C to 50°C (-22°F to 122°F)
Input/Output Cable Range	4/0-1000 kcmil

SHEAR BOLT LUG RANGE - OPTIONAL

Part Numbers	Description	Cable Size
1974148-1	ASBT-350-500-U	350-500 kcmil
1974149-1	ASBT-600-750-U	600-750 kcmil
1974153-1	ASBT-1000-U	1000 kcmil

Learn more: [TE.com/cts](https://www.te-connectivity.com/cts)

© 2025 TE Connectivity. All Rights Reserved. EPP-4452-DDS-05/25

TE, TE Connectivity, TE connectivity (logo), EVERY CONNECTION COUNTS are trademarks owned or licensed by TE Connectivity. Other logos, product and company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions, specifications, and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications, and/or information. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Connect with us:
[TE.com/solar-contact](https://www.te-connectivity.com/solar-contact)