
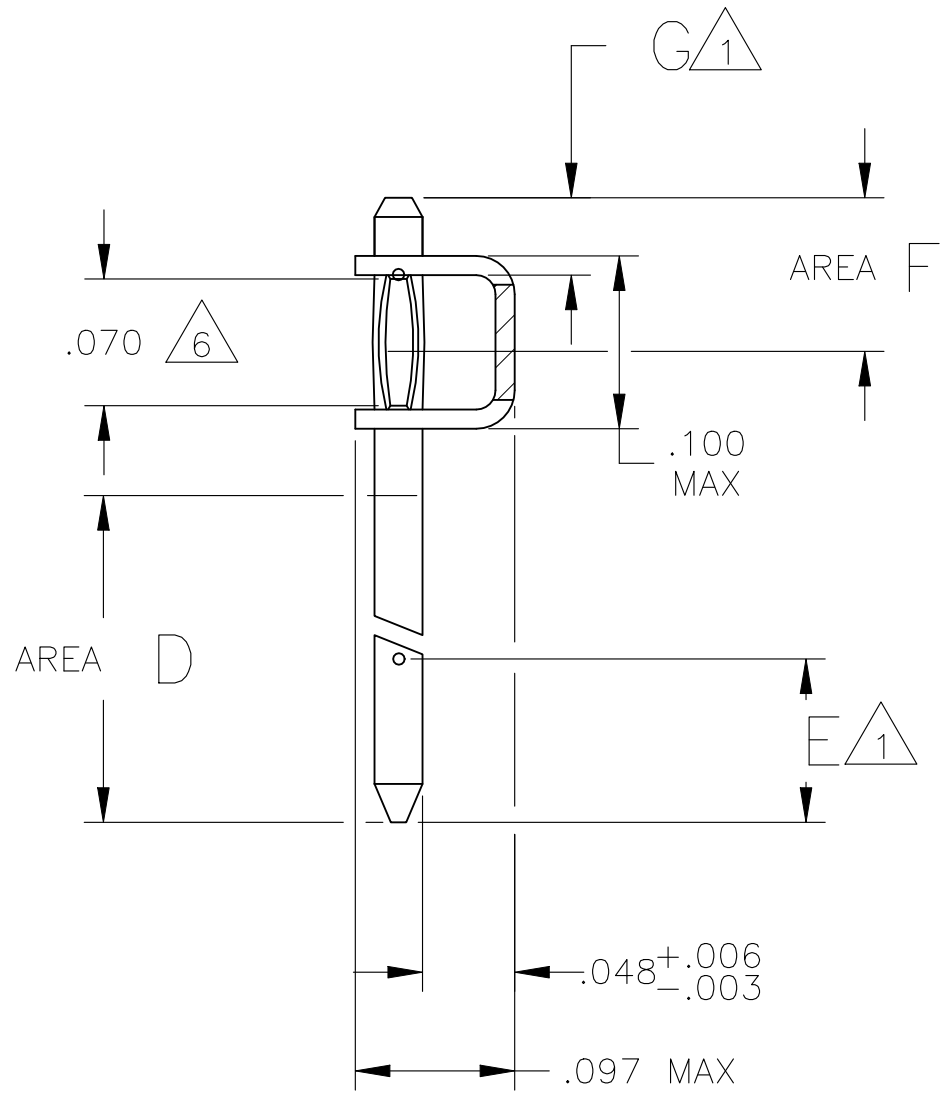


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G5	OBSOLETE THE PN 6-103577-9	12OCT2023	SP	JK

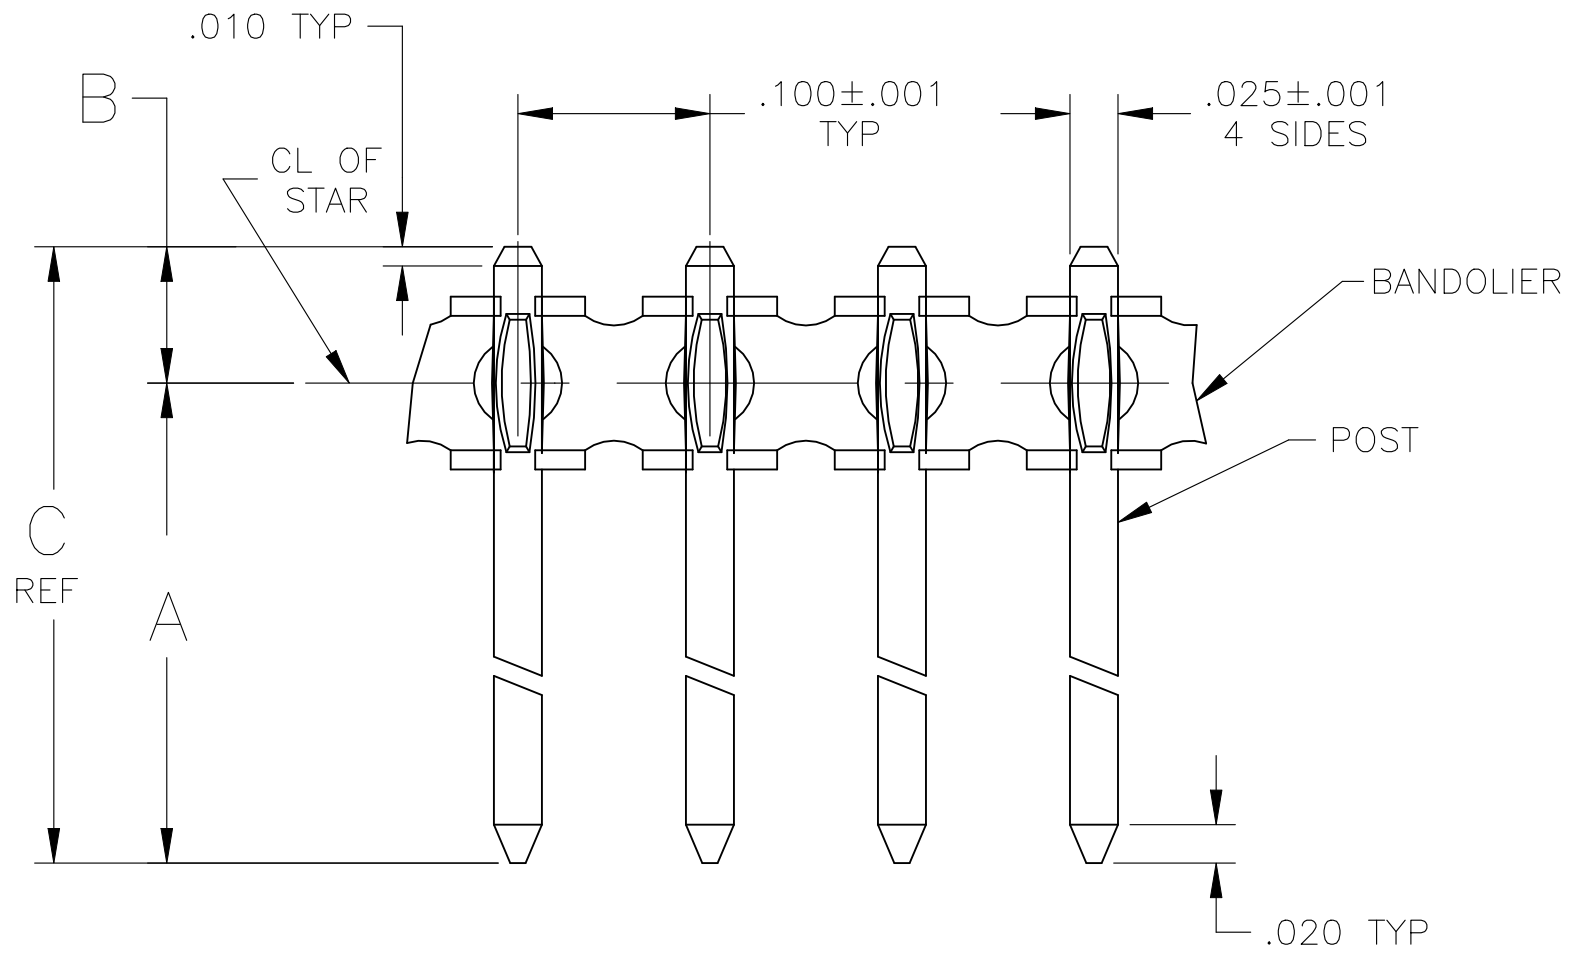

NOTES:

- 1

POINT OF MEASUREMENT FOR PLATING THICKNESS
- 2

.000030 GOLD ON AREA D, .000100 – .000200 MATTE TIN-LEAD ON AREA F, ALL OVER .000050 – .000100 NICKEL ENTIRE POST
- 3

.000100 – .000200 BRIGHT TIN-LEAD OVER .000050 – .000100 NICKEL ENTIRE POST
- 4

RECOMMENDED P.C.BOARD HOLE SIZE:

P C BOARD THICKNESS	PLATED HOLE SIZE	UNPLATED HOLE SIZE
.062	.034±.002	.036±.002
.093	.034±.002	.036±.002
.125	.034±.002	.036±.002
- 5

.000015 GOLD ON AREA D, .000100 – .000200 MATTE TIN-LEAD ON AREA F, ALL OVER .000050 – .000100 NICKEL ENTIRE POST.
- 6

DIMENSION PERTAINS TO THE LENGTH OF THE INTERFERENCE AREA OF THE STAR.
- 7

~~PRELIMINARY PART – NOT RELEASED FOR PRODUCTION.~~
- 8

.000030 GOLD ON AREA D, .000100-.000200 MATTE TIN ON AREA F. ALL OVER .000050 – .000100 NICKEL ENTIRE POST.
- 9

.000100-.000200 MATTE TIN OVER .000050 – .000100 NICKEL ENTIRE POST.
- 10

.000015 GOLD ON AREA D, .000100-.000200 MATTE TIN ON AREA F, ALL OVER .000050 – .000100 NICKEL ENTIRE POST.
- 11

ROHS 2002/95/EC COMPLIANT.
- 12

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

12	OBSOLETE	.245	10	.015	.080	.080	.230	.451	.071	.380	11	6-103577-9
12	OBSOLETE	.235	10	.015	.080	.100	.185	.341	.071	.270	11	6-103577-7
		.283	10	.015	.080	.100	.185	.389	.071	.318	11	6-103577-5
12	OBSOLETE	.318	10	.015	.080	.100	.200	.424	.071	.353	11	6-103577-3
		.235	9	–	–	–	–	.341	.071	.270	11	6-103577-1
12	OBSOLETE	.283	9	–	–	–	–	.389	.071	.318	11	5-103577-9
12	OBSOLETE	.318	9	–	–	–	–	.424	.071	.353	11	5-103577-7
		.235	8	.015	.080	.100	.185	.341	.071	.270	11	5-103577-5
		.283	8	.015	.080	.100	.185	.389	.071	.318	11	5-103577-3
		.318	8	.015	.080	.100	.200	.424	.071	.353	11	5-103577-1
12	OBSOLETE	.245	5	.015	.080	.080	.230	.451	.071	.380		1-103577-9
		.235	5	.015	.080	.100	.185	.341	.071	.270		1-103577-7
		.283	5	.015	.080	.100	.185	.389	.071	.318		1-103577-5
		.318	5	.015	.080	.100	.200	.424	.071	.353		1-103577-3
		.235	3	–	–	–	–	.341	.071	.270		1-103577-1
12	OBSOLETE	.283	3	–	–	–	–	.389	.071	.318		103577-9
		.318	3	–	–	–	–	.424	.071	.353		103577-7
		.235	2	.015	.080	.100	.185	.341	.071	.270		103577-5
		.283	2	.015	.080	.100	.185	.389	.071	.318		103577-3
		.318	2	.015	.080	.100	.200	.424	.071	.353		103577-1
MATING HEIGHT ABOVE BOARD (REF)		FINISH	G	F	E	D	C	B	A	ASSEMBLY PART NUMBER		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

MATERIAL
BANDOLIER – BRASS
POST–PHOS BRONZE

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± – ± –
FINISH
BANDOLIER – NONE
POST–SEE TABLE

WEIGHT –

CUSTOMER DRAWING

DWN C.DOUTY 12AUG87
CHK R.FEIDT 12SEP87
APVD R.FELICKER 12SEP87
PRODUCT SPEC
APPLICATION SPEC
NAME

SIZE CAGE CODE DRAWING NO
A1 00779 103577

RESTRICTED TO
–

TE Connectivity

ASSEMBLY, BANDOLIER, .100 CL, .025 SQUARE POSTS

SCALE 10:1 SHEET 1 OF 1 REV G5