

te.com







Features

- Low Transverse Sensitivity
- Critical 0.7 Damping Ratio
- Standard <25mV ZMO
- 10,000g Shock Protection
- 2-10Vdc Excitation
- Silicon Piezoresistive Elements
- -20°C to +80°C Temperature Range

Applications

- Anthropomorphic Dummy Instrumentation
- Crush Zone Testing
- Pedestrian Impact Testing
- Auto Safety Testing Applications
- · Shock and Impact Testing
- Transient Drop Testing
- Munitions Testing

MODEL 40B CRASH TEST ACCELEROMETER

Specifications

- Critically Damped DC Accelerometer
- Pedestrian Impact Testing
- Compliant to SAE J211/J2570
- Compliant to ISO 6487
- ±25g to ±2000g Dynamic Range
- Temperature Compensated

The TE Connectivity model 40B is a critically fluid damped DC accelerometer designed for anthropomorphic dummy and pedestrian impact testing and is compliant with the latest SAE J211/J2570 safety regulations. The accelerometer features a full bridge output configuration with built-in mechanical over-range stops for optimum protection. The model 40B accelerometer has a standard cross-talk accuracy of <3% (with option for <1%) and a standard ZMO of <±25mV.

The model 40B crash test accelerometer is offered in ranges from ±25g to ±2000g and features anodized aluminum housing with an industry standard mounting footprint.

The crash test accelerometer has a standard operating temperature range of -20°C to +80°C and is environmentally sealed with an integral cable strain relief. The flexible cable is also designed for high-g impact testing with minimal triboelectric induced noise.

For a triaxial option, TE Connectivity also offers the critically damped model 43 accelerometer with identical performance.

CLICK HERE > CONNECT WITH A SPECIALIST

Performance Specifications

All values are typical at $\pm 24^{\circ}$ C, 80Hz and 10Vdc excitation unless otherwise stated. TE Connectivity reserves the right to update and change these specifications without notice.

PARAMETERS

DYNAMIC							NOTES
Range (g)	±25	±100	±250	±500	±1000	±2000	
Sensitivity (mV/g) ¹	6.0	1.5	0.60	0.30	0.15	0.075	@10Vdc Excitation
Frequency Response (Hz)	0-200 0-350	0-400 0-675	0-600 0-1100	0-1100 0-2000	0-1500 0-2700	0-2500 0-4500	±2.5%/-8% ±2.5%/-20%
Natural Frequency (Hz)	>800	>1500	>2500	>4500	>6000	>10000	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1% Option
Non-Linearity (%FSO)	<±1	<±1	<±1	<±1	<±1	<±1	
Damping Ratio	0.7	0.7	0.7	0.7	0.7	0.7	Typical
Shock Limit (g)	5000	10000	10000	10000	10000	10000	
ELECTRICAL							
Zero Acceleration Output (mV)	<±25						Differential
Excitation Voltage (Vdc)	2 to 10						
Input Resistance (Ω)	2000						Nominal
Output Resistance (Ω)	1000						Nominal
Insulation Resistance (MΩ)	>100						@100Vdc
Residual Noise (μV RMS)	<10						
Ground Isolation	Isolated from mounting surface						
ENVIRONMENTAL							
Thermal Zero Shift (mV)	±3.0						From -10°C to +50°C
Thermal Sensitivity Shift (%/°C)	±0.1						From -10°C to +50°C
Operating Temperature (°C)	-20 to +80						
Humidity	Epoxy Sealed, IP65						
PHYSICAL							
Case Material	Anodized Aluminum						
Cable	5x #30 AWG Leads, PFA Insulated, Braided Shield, PU Jacket						
Weight (grams)	<5						Cable not included
Mounting	2x #0- 80 x 3/16" Socket Head Cap Screws						
Mounting Torque 1.0-1.5 lb-in (0.11-0.17 Nm)							
Output is retismative to evolution voltage. Televance is . F00/ / 200/							

¹ Output is ratiometric to excitation voltage. Tolerance is +50%/-30%.


Calibration supplied: CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to Upper Frequency Limit

Supplied accessories: AC-A03923 2x #0-80 (3/16" length) Socket Head Cap Screw, 2x #0 Washer, 1x Allen Key


Optional accessories: MTG-E4 Triaxial Mounting Block

121 3-Channel Precision Low Noise DC Amplifier


Typical Frequency Response

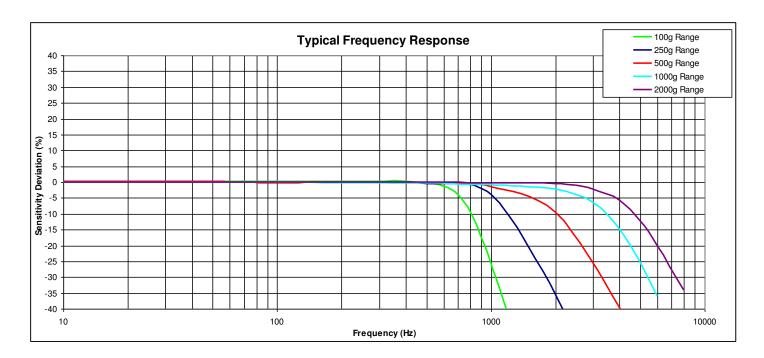


Schematic

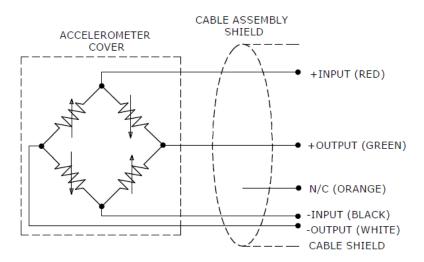


Dimensions

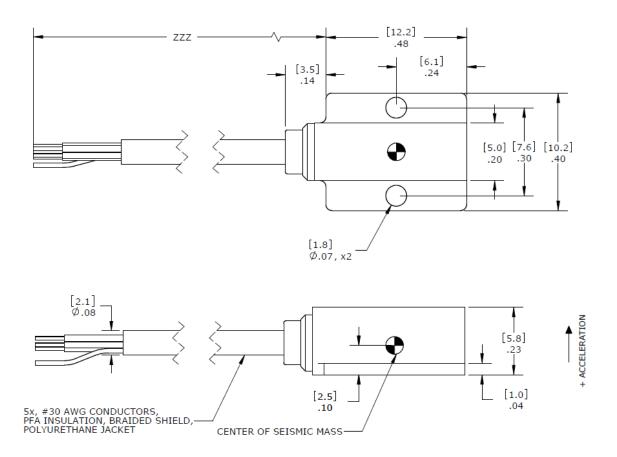

Triaxial Mounting Block

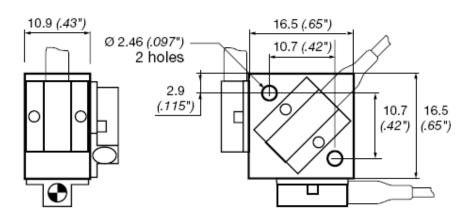

Ordering Information

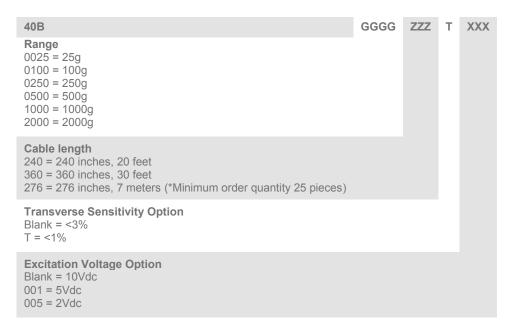

Example; 40B-2000-360

Model 40B, 2000g range, 360inch (30ft) cable length

Example; 40B-0500-276T

Model 40B, 500g range, 276inch (7m) cable length, <1% transverse sensitivity option

CLICK HERE > CONNECT WITH A SPECIALIST

NORTH AMERICA

Measurement Specialties, Inc., a TE Connectivity Company Tel: 800-522-6752 customercare.hmpt@te.com

EUROPE

MEAS France SAS a TE Connectivity Company Tel: +31 73 624 6999 customercare.lcsb@te.com

ASIA

Measurement Specialties (China), Ltd., a TE Connectivity Company Tel: 0400-820-6015 customercare.shzn@te.com

te.com

TE Connectivity, TE, TE Connectivity (logo) and Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2019 TE Connectivity Corporation. All Rights Reserved.

Version # 10/2020