

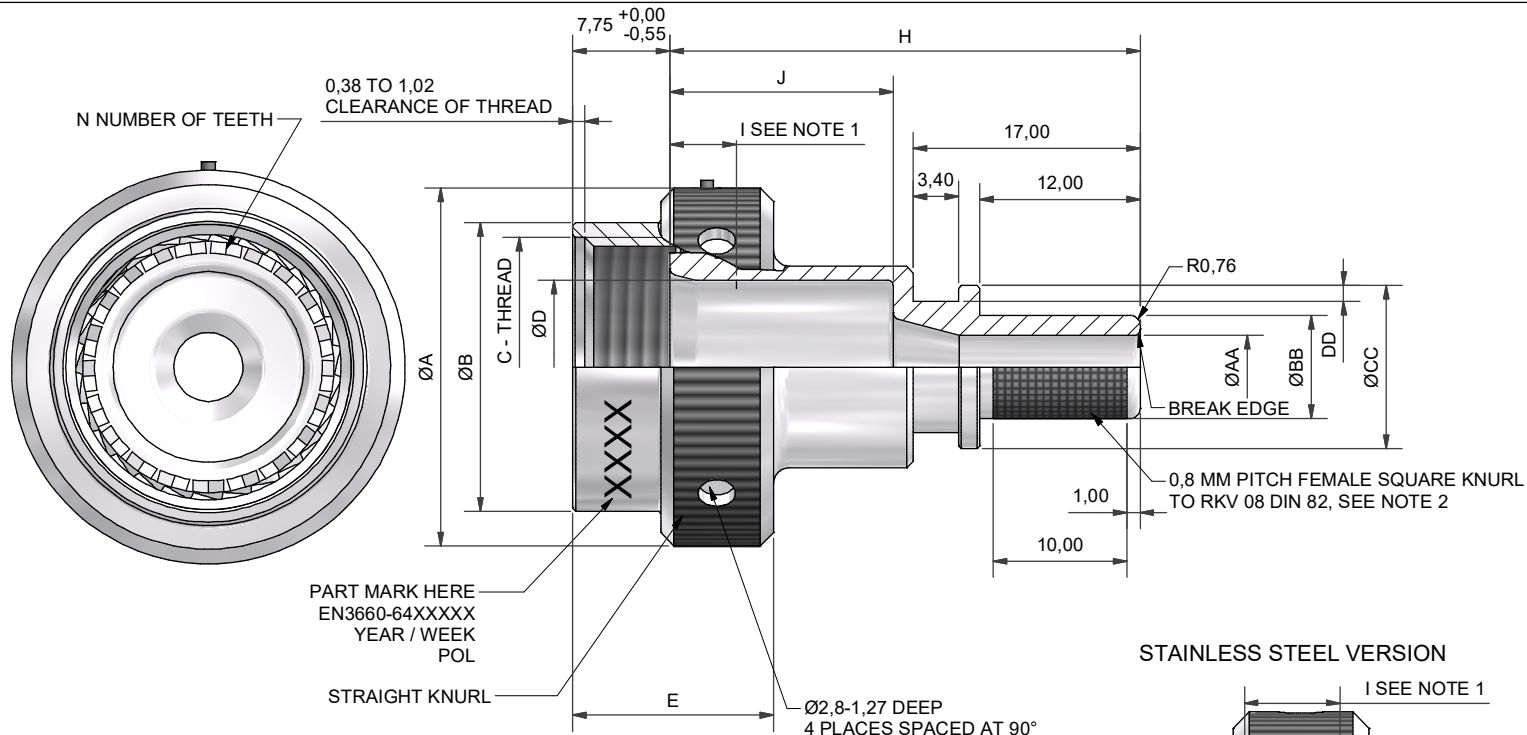


TABLE 1

CLASS	MATERIAL/FINISH
F	ALUMINIUM/NICKEL PLATED
K	STAINLESS STEEL/PASSIVATED
KE	STAINLESS STEEL/PASSIVATED
W	ALUMINIUM/OLIVE DRAB CADMIUM PLATED
Z	ALUMINIUM/ZINK NICKEL PLATED

TABLE 3

LENGTH CODE WIRING CHAMBER	H MAX	J
A	27,5	8,57
B	35,5	16,57
C	40,5	21,6
D	50,5	31,6

TABLE 2

SHELL SIZE	A MAX	B MAX	C THREAD	D +0/-0,25	D2 +0/-0,25	E MAX	I MIN	N	MAXIMUM ENTRY SIZE
08	22,48	15,67	1/2-20 UNF	6,86	6,68 see note 3	15,30	4,95	12	D
10	25,65	18,64	5/8-24 UNEF	9,53	9,35 see note 3	15,30	4,95	15	F
12	28,83	21,79	3/4-20 UNEF	12,98	12,62 see note 3	15,30	4,95	21	H
14	32,00	24,99	7/8-20 UNEF	14,86	14,86	15,30	4,95	24	J
16	35,18	28,24	1-20 UNEF	18,03	17,73 see note 3	15,30	4,95	30	K
18	38,55	30,94	1 1/16-18 UNEF	20,04	20,04	15,30	4,95	33	K
20	41,53	34,16	1 3/16-18 UNEF	23,22	23,22	15,30	4,95	36	L
22	44,70	37,29	1 5/16-18 UNEF	26,39	26,39	15,30	4,95	39	M
24	47,89	40,46	1 7/16-18 UNEF	29,31	29,31	15,30	4,95	42	M
28	54,23	49,45	1 3/4-18 UNS	35,28	35,28	15,30	4,95	54	M

TABLE 4

CABLE ENTRY SIZE CODE	AA +/-0,1	BB +/-0,1	CC +/-0,3	DD +0,2/-0
A	4,7	7,7	12,2	1,12
B	6,4	9,4	14,0	1,12
C	7,9	11,0	15,5	1,12
D	9,5	12,6	17,1	1,12
E	11,1	14,1	18,7	1,12
F	12,7	15,7	20,3	1,12
G	15,9	18,9	23,5	1,12
H	19,1	22,0	26,7	1,12
J	22,2	25,2	29,8	1,75
K	25,5	28,4	33,0	1,75
L	28,6	31,5	36,2	1,75
M	31,8	34,7	39,4	1,75

* NOTES:

- 1 - MINIMUM PENETRATION OF ØD OR ØD2 FROM FRONT OF SERRATIONS
 2 - PLEASE NOTE THERE MAY BE CROSSOVER DEPENDENT ON DIAMETER AND PITCH
 3 - APPLY TOLERANCE +0,18/-0

EN3660-064W10BB

SERIES _____
 CLASS, MATERIAL FINISH (TABLE 1) _____
 SHELL SIZE (TABLE 2) _____
 LENGTH CODE WIRING CHAMBER (TABLE 3) _____
 CABLE ENTRY SIZE CODE (TABLE 4) _____

DRAWN	W.RUST	DATE 26/04/2018		 POLAMCO LTD www.polamco.com	WESTON LOCK LOWER BRISTOL ROAD BATH BA2 1EP	THIS DRAWING IS COPYRIGHT AND THE PROPERTY OF POLAMCO LTD IT MUST NOT BE COPIED, USED FOR MANUFACTURE OR OTHERWISE DISCLOSED WITHOUT PRIOR WRITTEN CONSENT OF THE COMPANY.	
SALES APPR	H.TAILLANDIER	26/04/2018					
DESIGN APPR	M.PAUL	06/01/2015	UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS IN MILLIMETRES GENERAL TOL LINEAR +/-0.25MM ANGULAR +/- 1°	ASSY USED ON: EN2997			
PROD APPR	J.STEPHENSON	06/01/2015	MATERIAL SEE ABOVE FINISH SEE ABOVE	TITLE:	ANTI-DECOUPLING BANDING ADAPTOR		
QUAL APPR	P.REES	06/01/2015					
ISSUE 3	DCR 6780				PART NUMBER:	EN3660-064*****	
NCAGE CODE U5792		WEIGHT					
						DRAWING NO: P20027	SHT 1