
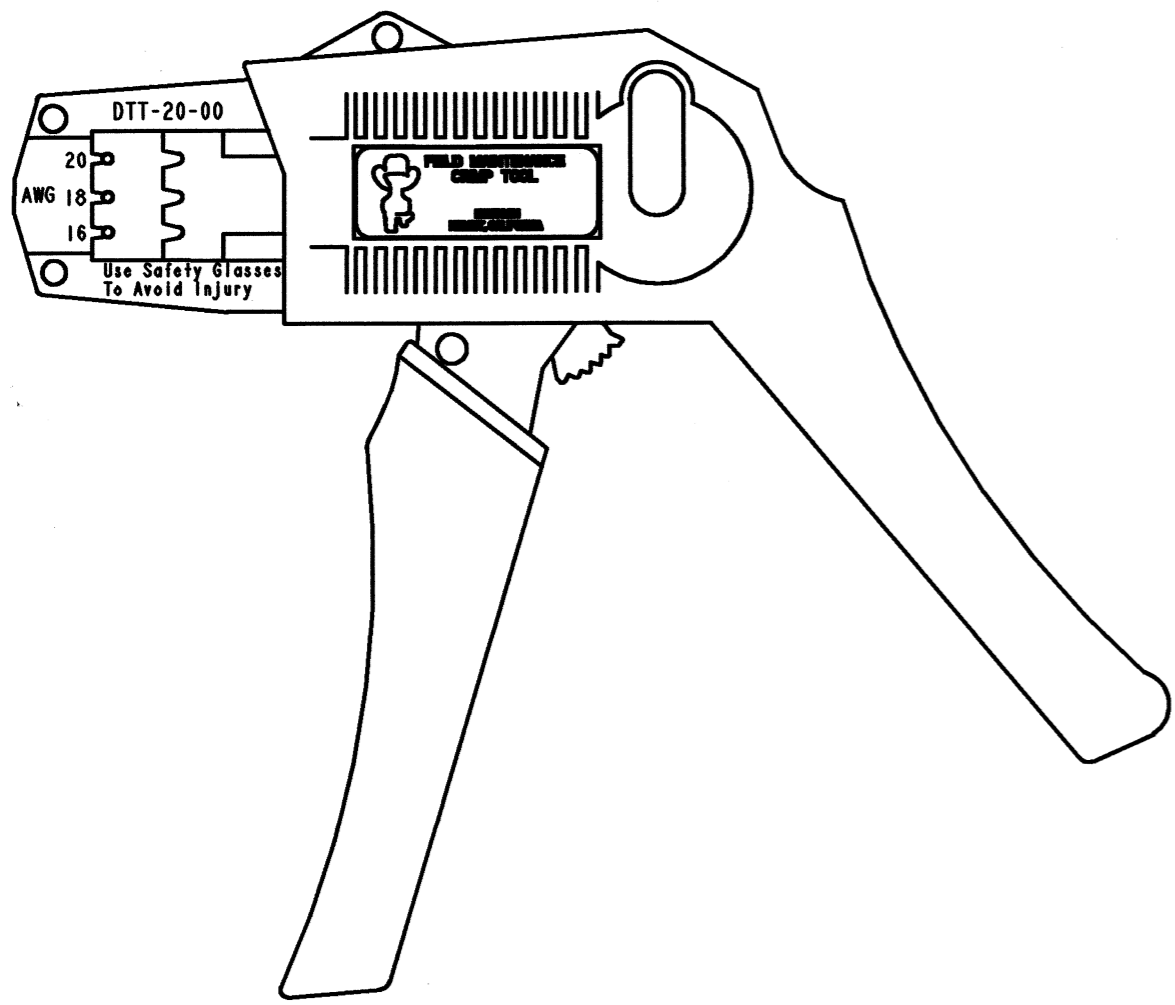


REV  
E DTT-20-00

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
B	REVISED PER E.O. P19405	11-20-06	R.D.R.
C	REVISED PER E.O. P19742	1-24-08	R.D.R.
D	REVISED PER E.O. P20232	5-20-09	R.D.R.
E	REVISED PER E.O. P20709	12-23-10	RDR

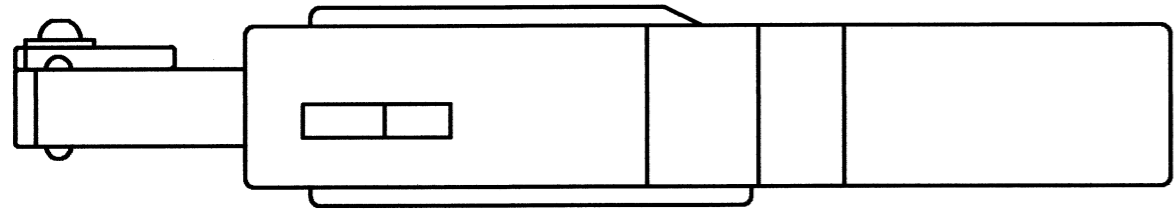

CONTACT PART NUMBER	CONTACT SIZE	TOOL CAVITY	CONDUCTOR RANGE	INSULATION RANGE
△ 1060-20-01** PIN 1062-20-01** SOCKET 1062-20-03** SOCKET, SLEEVELESS	20	20	20 AWG [0.50 - 0.80mm <sup>2</sup> ]	.075 - .125 [1.91 - 3.18]
		18	18 AWG [0.60 - 0.80mm <sup>2</sup> ]	.075 - .125 [1.91 - 3.18]
		16	16 - 18 AWG [0.75 - 1.50mm <sup>2</sup> ]	.075 - .125 [1.91 - 3.18]

- △ 3. THIS TOOL IS DESIGNED TO CRIMP SIZE 20 STAMPED CONTACTS TO WIRE INDICATED.
- △ 2. WHEN \*\* = 22, CONTACT PLATING IS NICKEL.  
 WHEN \*\* = 44, CONTACT PLATING IS SELECTIVE GOLD.  
 WHEN \*\* = 66, CONTACT PLATING IS TIN/NICKEL.

1. ALL DIMENSIONS ARE IN INCHES [mm].  
 NOTES: UNLESS OTHERWISE SPECIFIED

TOLERANCES UNLESS OTHERWISE SPECIFIED DECIMALS: .XXX±.005 ANGLES: ±0°30'0" TIR: .010 PARTS TO BE FREE OF BURRS AND SHARP EDGES	SIGNATURE & DATE	
	DR	A. LEE 12JUNE97
MATERIAL	CHK	Paul Cal 12/23/10
	PE	Paul Cal 12/6/2010
FINISH	APPD	S. Beard 12-20-10
	SCALE	NONE WT _____

**FIELD MAINTENANCE  
 CRIMP TOOL  
 20 SIZE  
 STAMPED CONTACT**

ENVELOPE

EP	MATL. CODE
3850 INDUSTRIAL AVE. HEMET, CA 92545	
<b>B</b>	<b>DTT-20-00</b>
DWG SIZE	CODE 11139 SHEET   OF