




## Dimensions

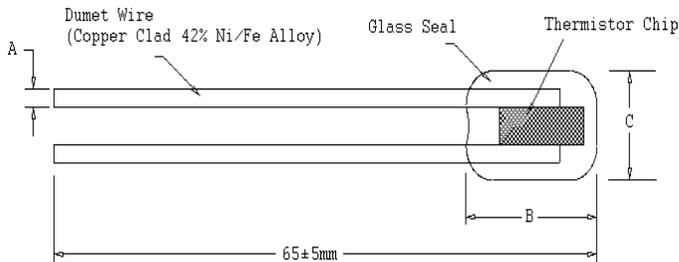

Dimensions			
	A	B	C
Series A Thermistor	0.3mm	4mm Max	2.5mm Max

## RADIAL GLASS NTC THERMISTORS – SERIES A

### SPECIFICATIONS

- 2 to 500K Ohms Resistance @25°C
- Hermetically Sealed Package
- High Temperature Stability
- Available in  $\pm 1\%$ ,  $\pm 2\%$ ,  $\pm 3\%$  or  $\pm 5\%$  tolerance @25°C.
- Rated up to +250 °C.
- Low cost

### RADIAL GLASS THERMISTORS

The NTC Chip hermetically sealed in a glass encapsulation package

### FEATURES

- 2 to 500K Ohms Resistance @25°C
- Proven Stability
- Glass Encapsulation
- Low cost
- Temperature range -40°C to +250°C
- RoHS Compliant

### APPLICATIONS

- Air conditioning systems
- Refrigeration control
- Assembly into probes for a wide variety of applications
- In environments where thermal shock and humidity are present
- Hot water boiler systems
- Sensor for engine temperature control

## RADIAL GLASS NTC THERMISTORS – SERIES A

### STABILITY

Reliability Tests	Standard	Test Condition	Delta R
Storage in Dry Heat	IEC 60068-2-2	Storage temperature: +250°C Duration: 1000 hours	< 3%
Storage in Damp Heat	IEC 60068-2-3	Temperature of air is 50°C & RH 93% Duration: 56 days.	< 2%
Rapid Temperature Cycling	IEC 60068-2-14	Lower Test Temperature -55°C Upper Test Temperature +200°C Number of Cycles 1000	< 2%

### PRODUCTION DEFINITION

Part Number	Resistance [Ω] @ +25°C	Tolerance @ +25°C	Beta Value 25/85	Beta Tolerance	Dissipation Constant in still air @ +25°C	Time response (Still Air)	Time response (Stirred Oil)
G2K3348A1	2,000	± 1%	3348	± 2%	1.3 mW/°C	12 Seconds	1.1 Seconds
G2K3499A1	2,000	± 1%	3499	± 2%	1.3 mW/°C	12 Seconds	1.1 Seconds
G5K3976A1	5,000	± 1%	3976	± 2%	1.3 mW/°C	12 Seconds	1.1 Seconds
G10K3435A1	10,000	± 1%	3435	± 2%	1.3 mW/°C	12 Seconds	1.1 Seconds
G10K3694A1	10,000	± 1%	3694	± 2%	1.3 mW/°C	12 Seconds	1.1 Seconds
G10K3976A1	10,000	± 1%	3976	± 2%	1.3 mW/°C	12 Seconds	1.1 Seconds
G30K3942A1	30,000	± 1%	3942	± 2%	1.3 mW/°C	12 Seconds	1.1 Seconds
G50K3976A1	50,000	± 1%	3976	± 2%	1.3 mW/°C	12 Seconds	1.1 Seconds
G100K4000A1	100,000	± 1%	4000	± 2%	1.3 mW/°C	12 Seconds	1.1 Seconds
G200K4261A1	200,000	± 1%	4261	± 3%	1.3 mW/°C	12 Seconds	1.1 Seconds
G500K4261A1	500,000	± 1%	4261	± 3%	1.3 mW/°C	12 Seconds	1.1 Seconds

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1711 139th Lane NW  
Andover, MN 55304  
Tel: +1 763 689 4870  
Fax: +1 763 689 5033  
customer care.ando@te.com

#### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Ballybrit Business Park  
Galway Ireland  
Tel : +353-91-753238  
Fax : +353-91-770789  
Email: customer care.glwy@te.com

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 368 Wulian 1st Road  
Gongxing Town  
Shuangliu, Chengdu  
Sichuan, 610200  
China  
Tel: +86 (0) 28 8573 9088  
Fax: +86 (0) 28 8573 9070  
Email: customer care.chdu@te.com

#### te.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties (MEAS), American Sensor Technologies (AST), TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2016 TE Connectivity Ltd. family of companies All Rights Reserved.