


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REV; ECO 17-005457	8-10-17	CT	EH

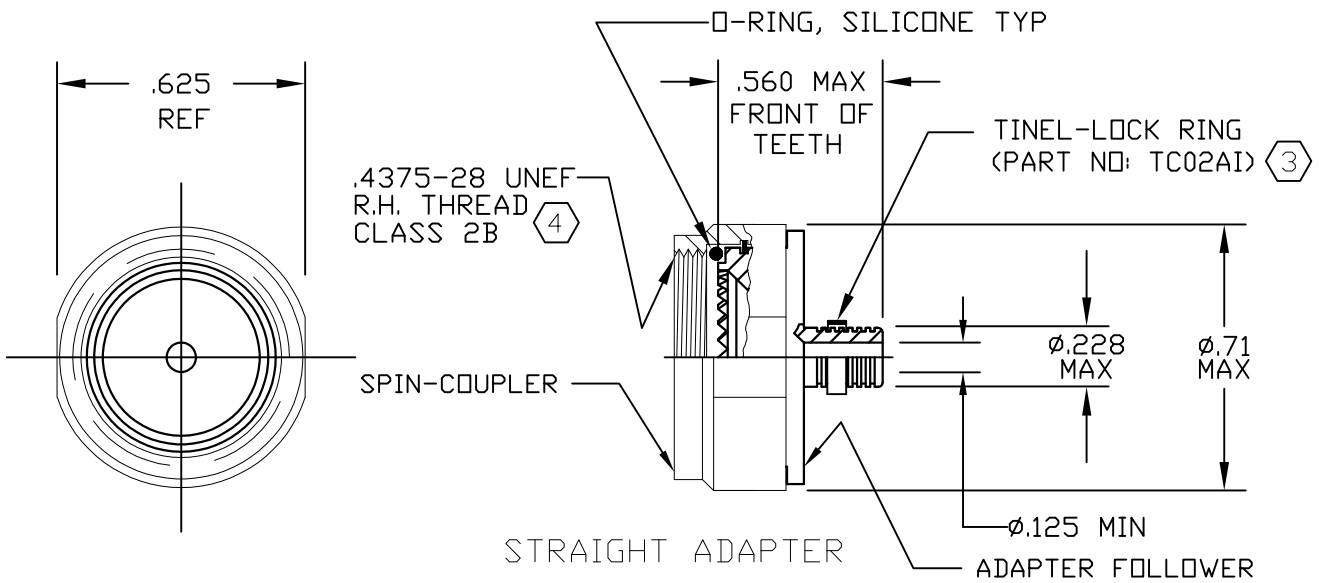

1. THIS PRODUCT IS DESIGNED TO TERMINATE A BRAIDED CABLE SHIELD AND A HEAT SHRINKABLE NON-LIPPED BOOT OR HEAT SHRINKABLE TUBING TO A CONNECTOR.
2. ADAPTER TO BE PERMANENTLY MARKED WITH CODE IDENT. NO. AND PART NO. LESS RING DESIGNATOR (EG. 06090-TXS30AC00-0802). RINGS SHALL BEAR NO MARKING.
3. SEE DRAWING 925177 FOR DETAILS ON TINEL-LOCK RING. RINGS ARE DESIGNED TO BE HEATED ELECTRICALLY. ALL RINGS ARE MARKED WITH THERMOCHROMIC PAINT WHICH CHANGES COLOR WHEN INSTALLATION TEMPERATURE IS REACHED.
4. ADAPTER MATES TO CANNON CONNECTOR # KPDRF6EE8-2S1

PART NUMBER: T X S 3 0 A C 0 0-0 8 0 2 A I

PRODUCT DESIGNATOR \_\_\_\_\_  
 MATERIAL: \_\_\_\_\_  
 A: ALUMINUM ALLOY PER QQ-A-225  
 FINISH: \_\_\_\_\_  
 C: ELECTROLESS NICKEL PER MIL-C-26074  
 CLASS 3 OR 4, GRADE B  
 STRAIGHT CONFIGURATION \_\_\_\_\_  
 ORDER NO. \_\_\_\_\_  
 ENTRY SIZE: \_\_\_\_\_  
 RING OPTION (AI = RING INCLUDED) \_\_\_\_\_  
 ( LEAVE BLANK - FOR NO RING)

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT - TE Connectivity

DIMENSIONS: INCHES	DWN C.C.THOMAS	10AUG2017	MATERIAL	-	FINISH	-
	CHK E.HALEY	8-10-17	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD E.HALEY	8-10-17				
0 PLC ± -	PRODUCT SPEC	-	NAME TINEL-LOCK ADAPTER			
1 PLC ± -	APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -			A4	06090	C-TXS30	-
3 PLC ± -	WEIGHT	0	CUSTOMER DRAWING			
4 PLC ± -			SCALE	NTS	SHEET	1 OF 1
ANGLES ± -						REV C