
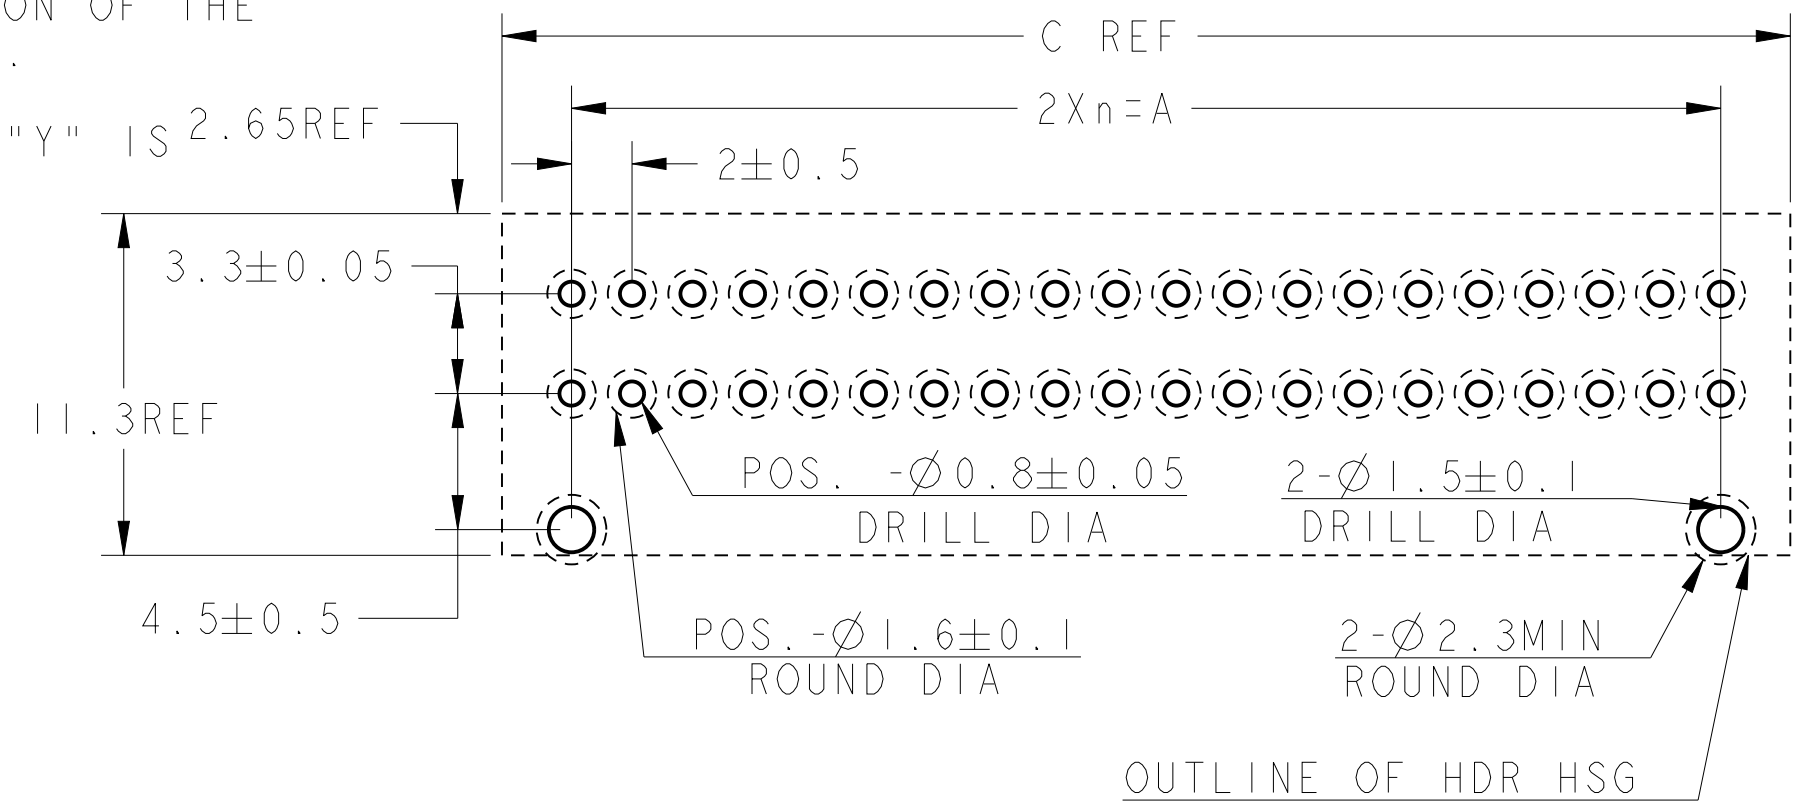




1. MATERIAL: HOUSING: GLASS FILED THERMO PLASTIC
POLYESTER(94V-0), COLOR: BLACK
CONTACT: COPPER ALLOY
RETENTION LEG: PRE-TIN COPPER ALLOY

LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
J	-		B	REVISED	14JUL2010	HMR	TM	
			C	REVISED	17DEC2012	H.M	N.Y	
			C1	REVISED ECR-17-005500	5MAY2017	N.W	C.W	
			C2	REVISED	04FEB2021	F.Z	R.B	

2. FINISH(ALL OVER): NICKEL PL. 1.27μmMIN
3. FINISH(CONTACT AREA): GOLD PL. 0.38μmMIN OR
Sn PLATED 1.0μmMIN AFTER 2
4. FINISH(CONTACT TAIL): TIN PL. 2μmMIN AFTER 2
5. THE SHAPE, SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLINE. THEY DON'T SHOW DETAILS.
6. THE KEYING ARRANGEMENT OF "Y" IS 2.65REF
SYMMETRIC WITH "X".

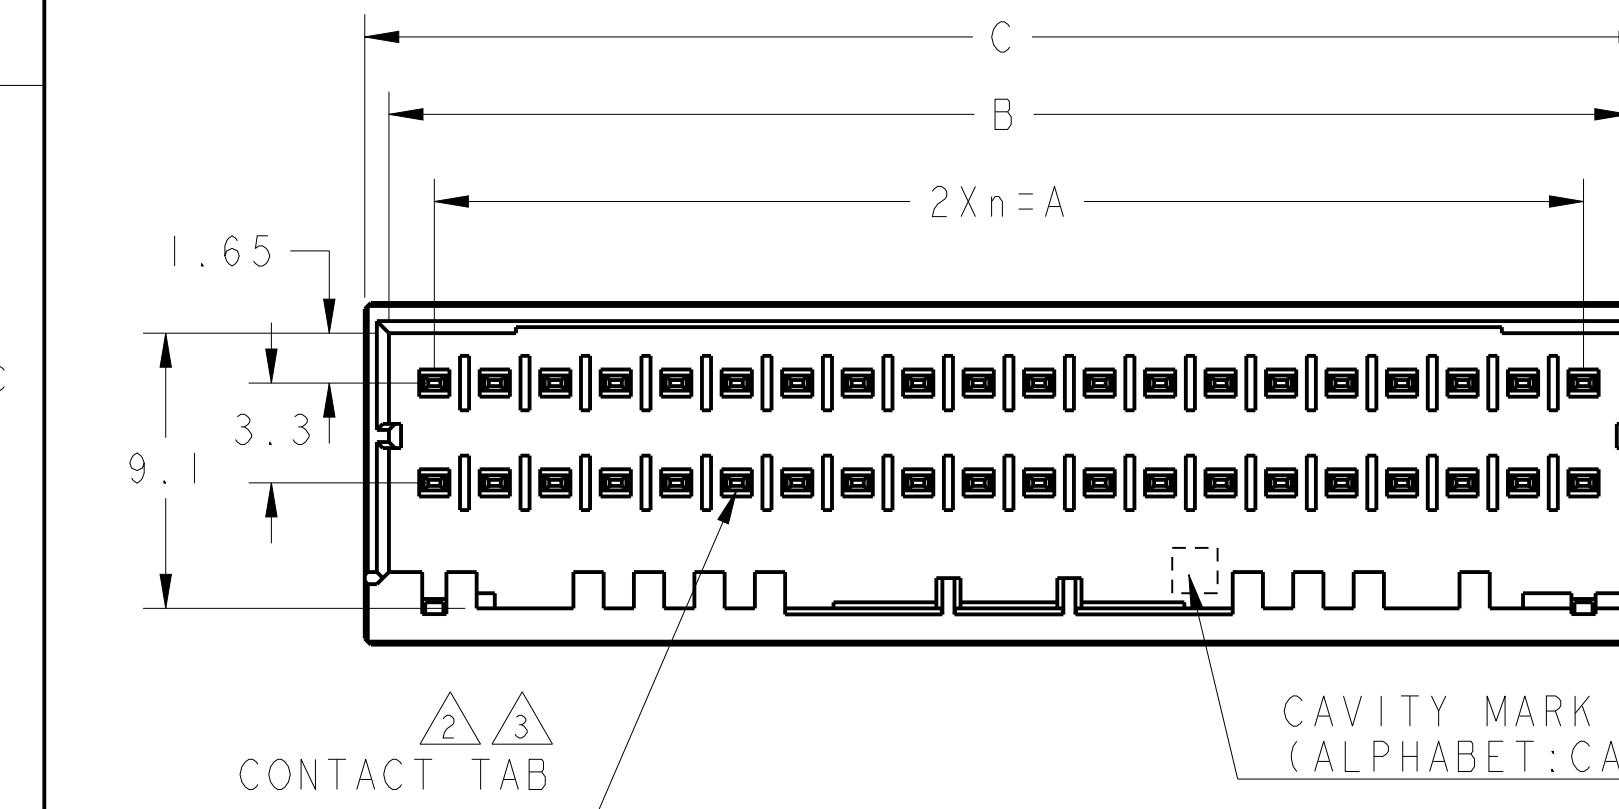

RECOMMEND PC BOARD HOLE PATTERN
: CONNECTOR MOUNT SIDE (NOT ACCUMULATE TOLERANCE)
PC BOARD THICKNESS : 1.0~1.6±0.1

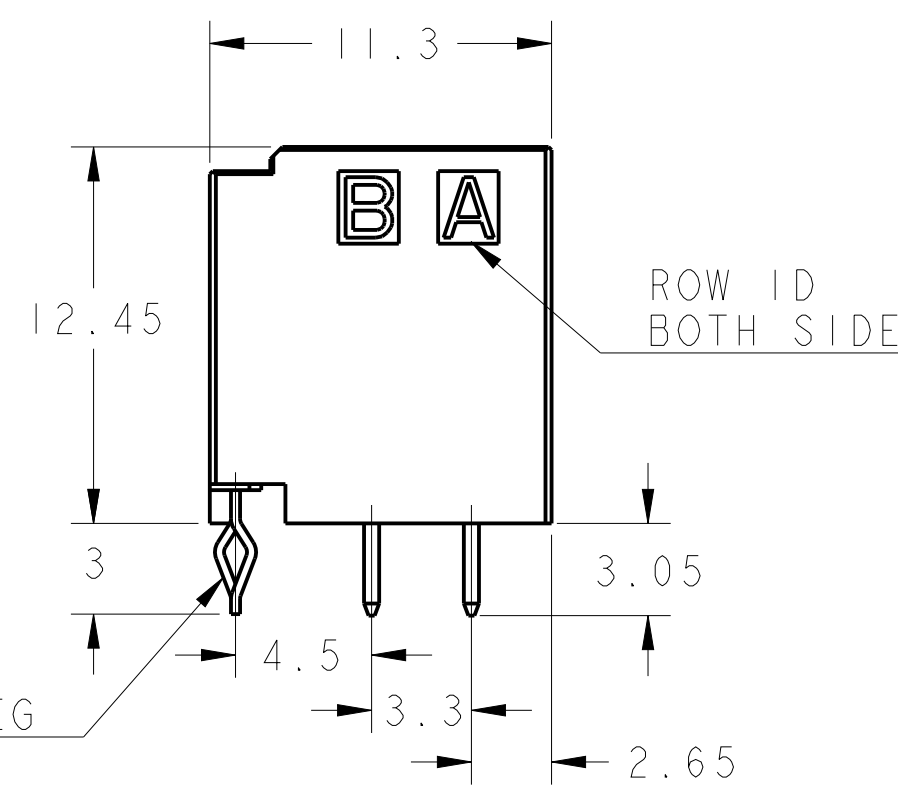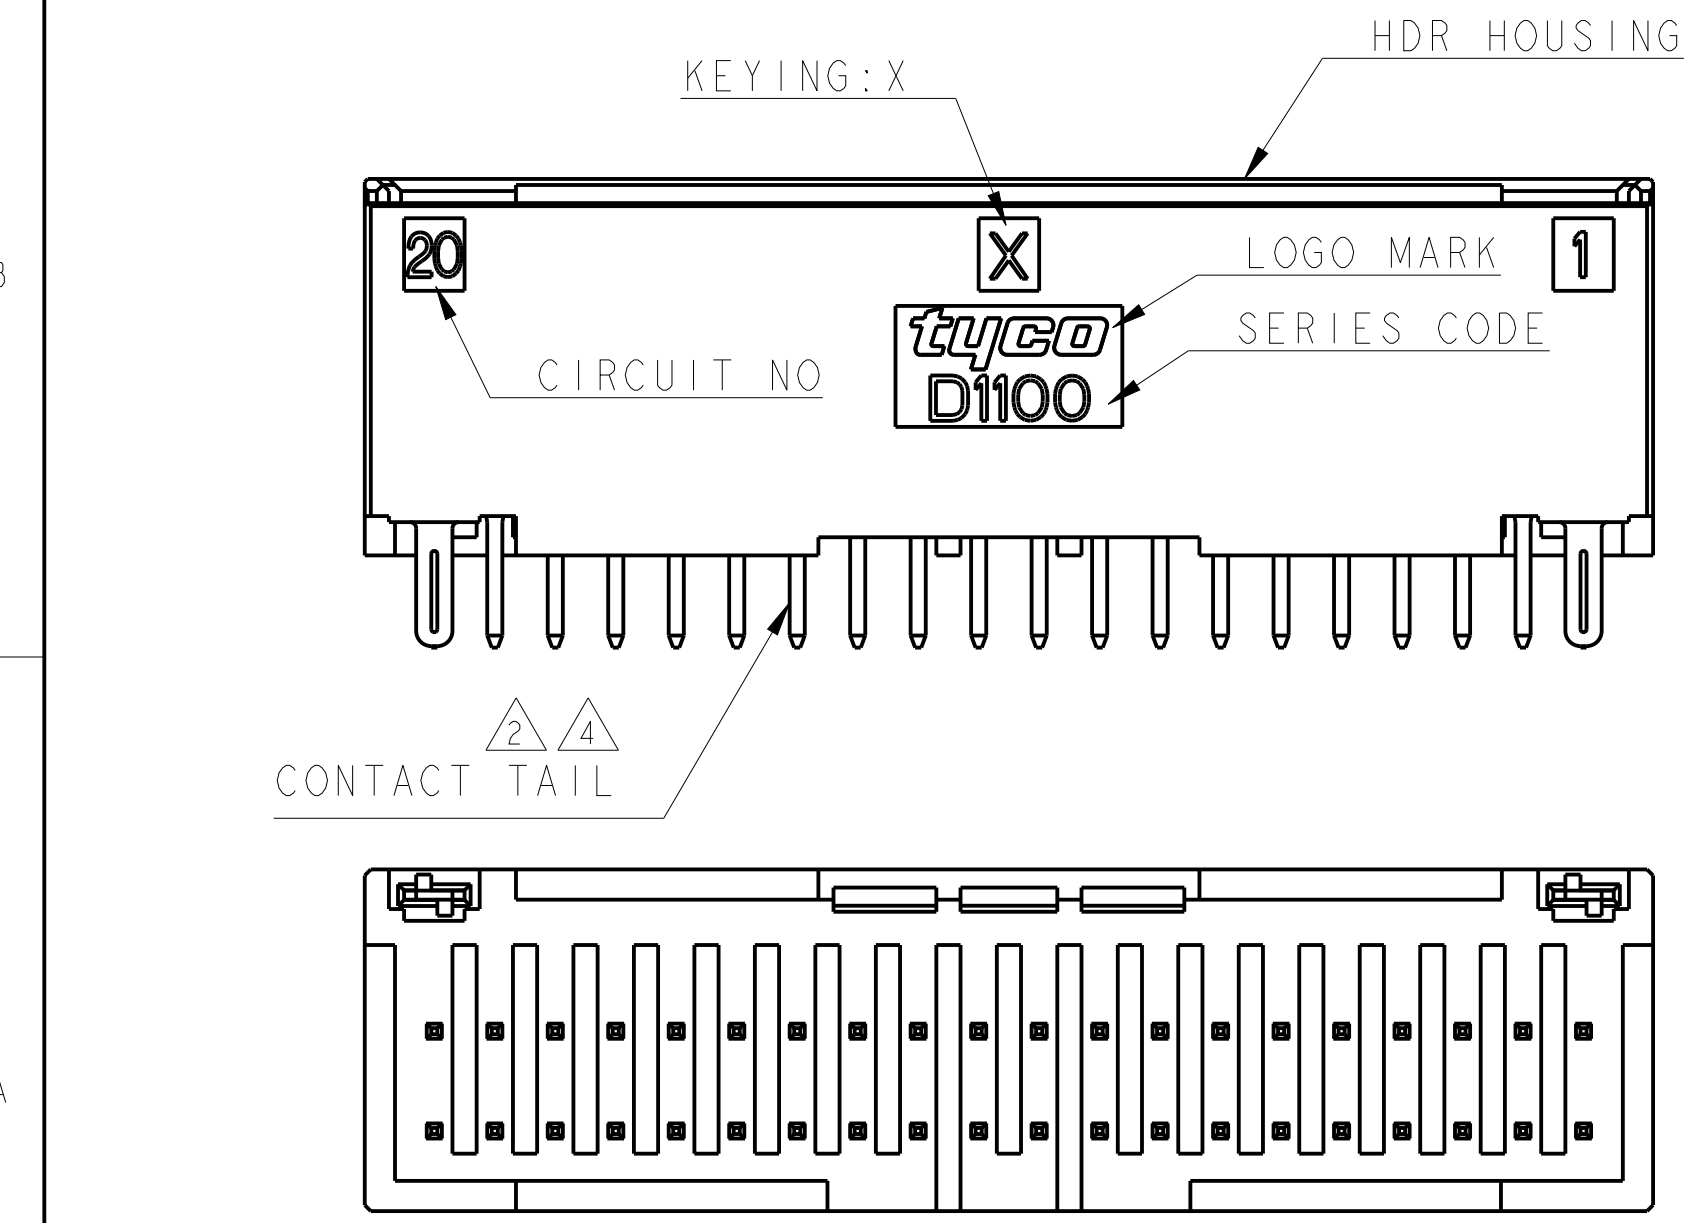

40	Y	19	38.0	41.0	42.6	GOLD PLATED	2-1827872-0
40	X	19	38.0	41.0	42.6	Sn PLATED	6-1827872-0
40	X	19	38.0	41.0	42.6	GOLD PLATED	1-1827872-0
34	Y	16	32.0	35.0	36.6	GOLD PLATED	2-1827872-7
34	X	16	32.0	35.0	36.6	Sn PLATED	6-1827872-7
34	X	16	32.0	35.0	36.6	GOLD PLATED	1-1827872-7
32	X	15	30.0	33.0	34.6	Sn PLATED	6-1827872-6
32	X	15	30.0	33.0	34.6	GOLD PLATED	1-1827872-6
30	X	14	28.0	31.0	32.6	Sn PLATED	6-1827872-5
30	X	14	28.0	31.0	32.6	GOLD PLATED	1-1827872-5
28	X	13	26.0	29.0	30.6	Sn PLATED	6-1827872-4
28	X	13	26.0	29.0	30.6	GOLD PLATED	1-1827872-4
26	X	12	24.0	27.0	28.6	Sn PLATED	6-1827872-3
26	X	12	24.0	27.0	28.6	GOLD PLATED	1-1827872-3
24	X	11	22.0	25.0	26.6	Sn PLATED	6-1827872-2
24	X	11	22.0	25.0	26.6	GOLD PLATED	1-1827872-2
22	X	10	20.0	23.0	24.6	Sn PLATED	6-1827872-1
22	X	10	20.0	23.0	24.6	GOLD PLATED	1-1827872-1
POS	KEY	n	A	B	C	FINISHED	PART NO

40POS(X-KEY): 1-1827872-0

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差 ±0.3, ±3°
1-PLC ±0.5
2-PLC ±0.13
3-PLC ±0.013
4-PLC ±0.001
ANGLES ±
FINISH 仕上

DWN I. KUDO 16MAR2005
CHK D. MITSUGI 23AUG2005
APVD D. MITSUGI 23AUG2005

PRODUCT SPEC
108-78268/78298
APPLICATION SPEC
取付適用規格
174-5377
WEIGHT
-

CUSTOMER DRAWING

TE Connectivity



DYNAMIC D1100D 2.0mmPITCH
HDR ASSY (V-TYPE)
22-40POS

SIZE A2
CAGE CODE 00779
DRAWING NO C-1827872
RESTRICTED TO



SCALE 4:1
SHEET 1 OF 3
REV C2

LOC	DIST	REVISIONS				
J	-	P	LTR	DESCRIPTION	DATE	DWN
SEE SHEET 1 OF 3						APVD

D



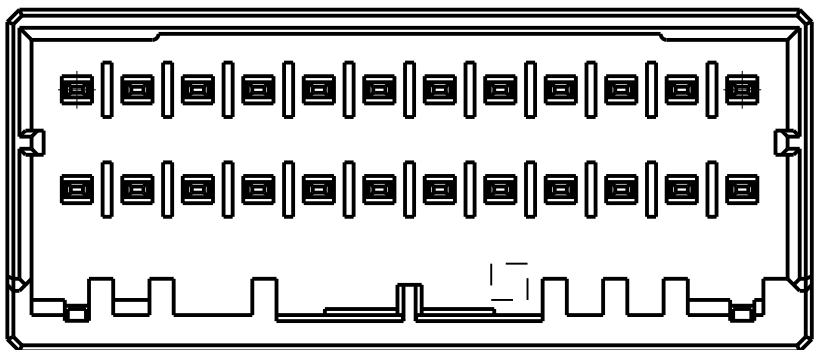
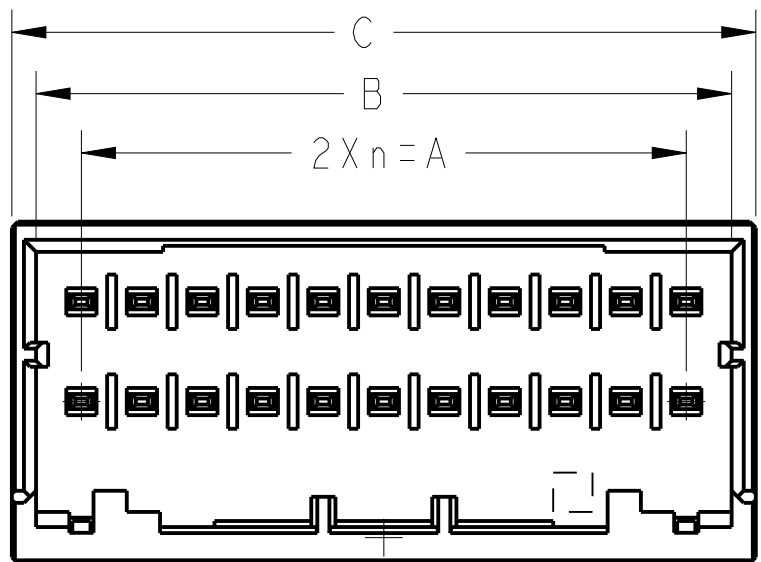


SCALE 4:1

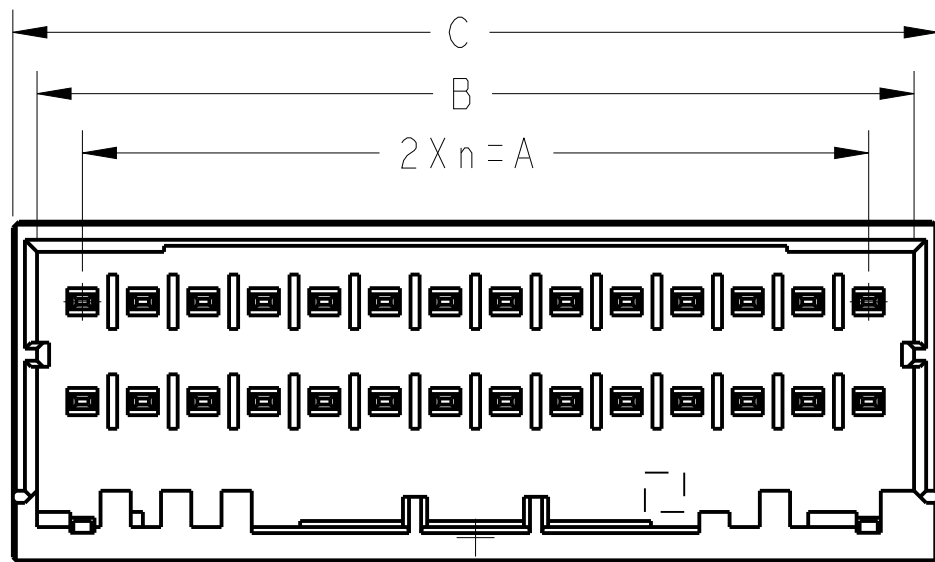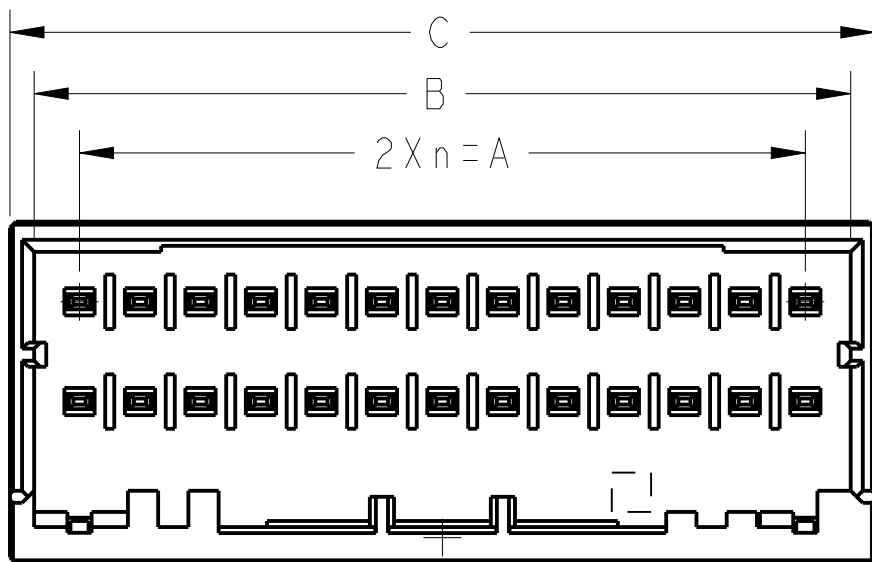





D

C

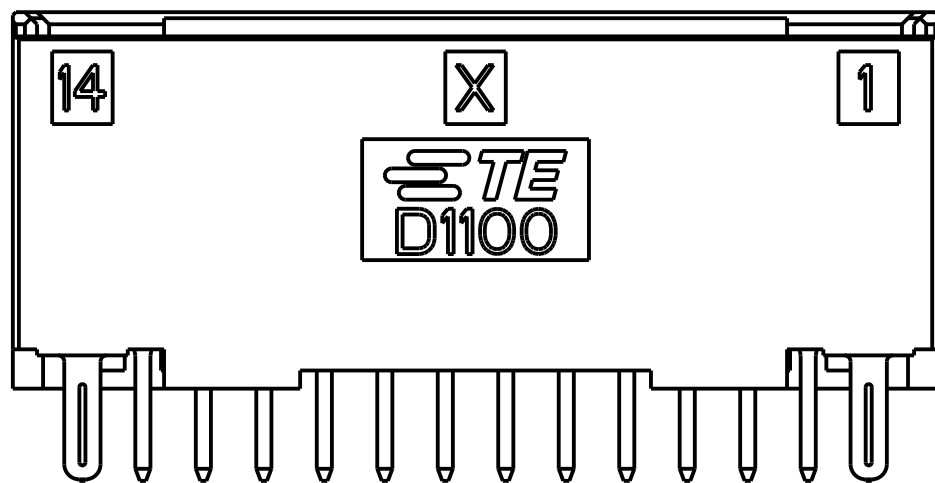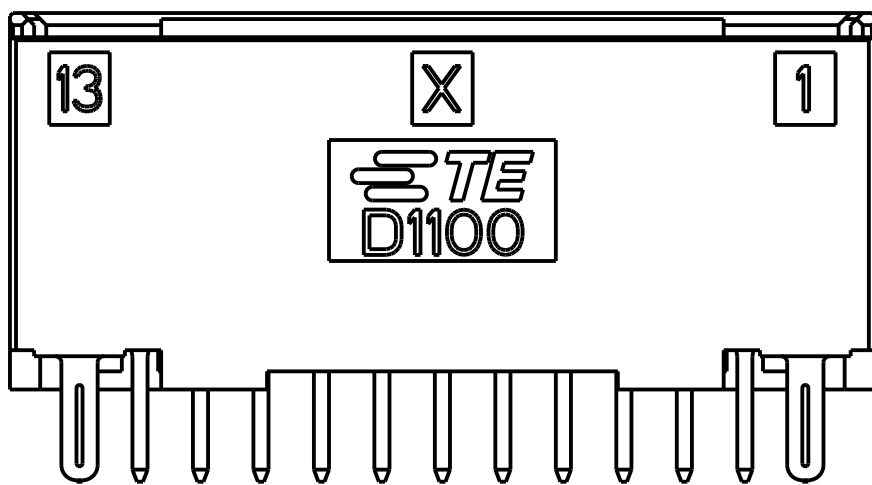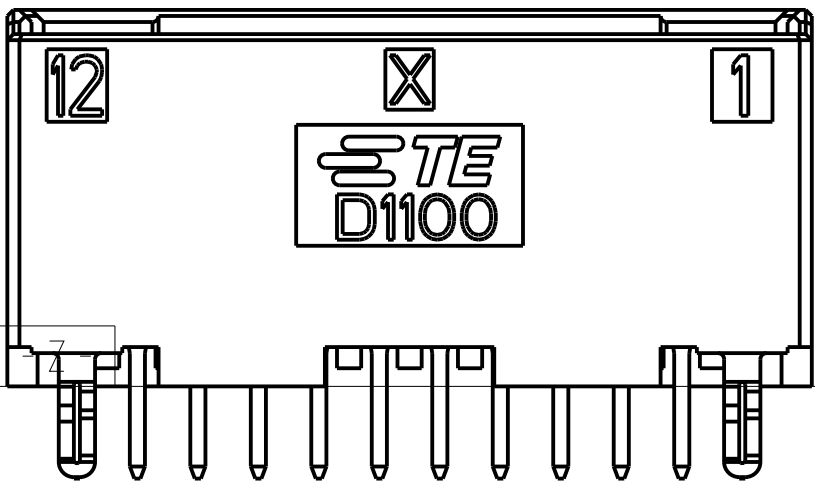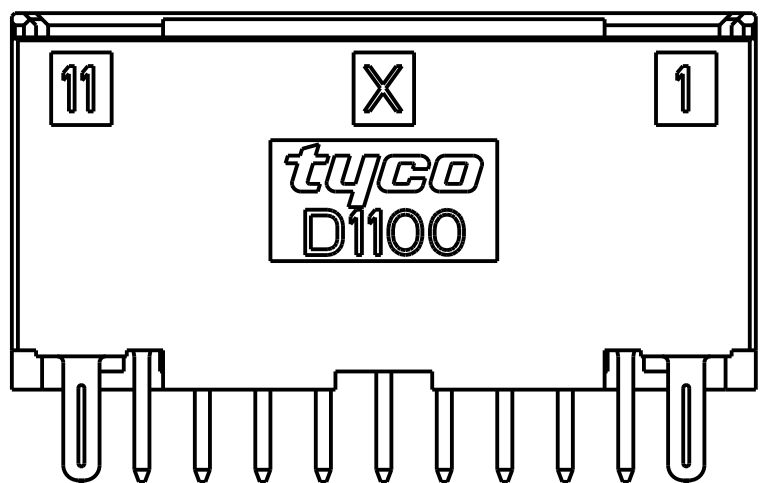

C

B

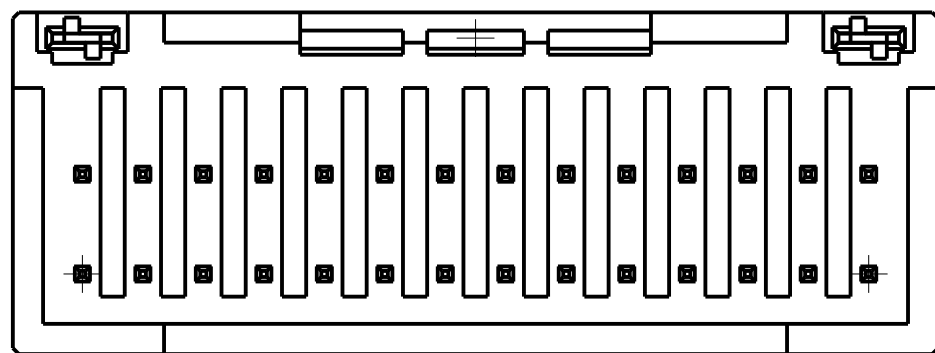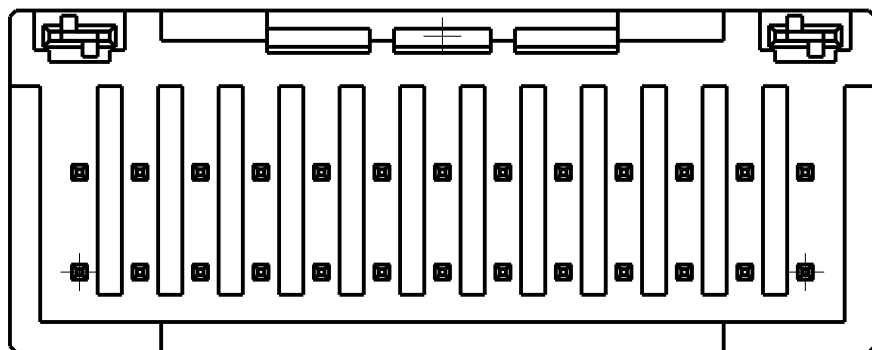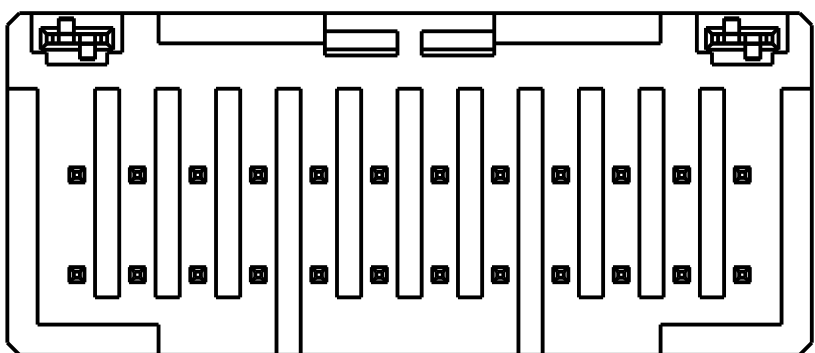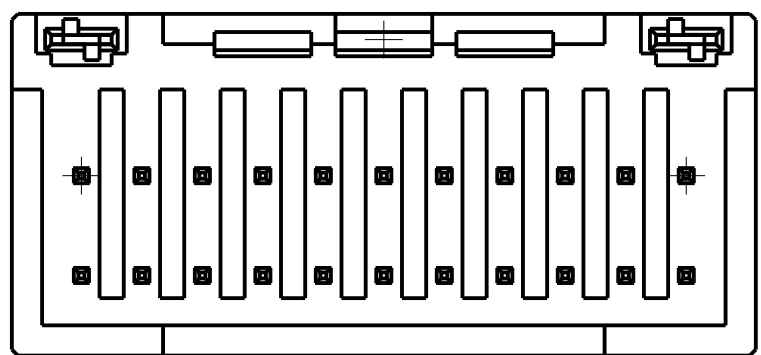

B

22POS(X-KEY): I-1827872-1

22POS(X-KEY): I-1827872-2

26POS(X-KEY): I-1827872-3







28POS(X-KEY): I-1827872-4

A

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN T. KUDO	16MAR2005	TE Connectivity		
DIMENSIONS: mm		CHK D. MITSUGI	23AUG2005			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. MITSUGI	23AUG2005	NAME DYNAMIC D1100D 2.0mmPITCH HDR ASSY (V-TYPE) 22-40POS		
1 ±0.5		PRODUCT SPEC		SIZE A200779		
2 ±0.13		APPLICATION SPEC		CAGE CODE C-1827872		
3 ±0.013		WEIGHT		DRAWING NO 114-5377		
4 ±0.0001		CUSTOMER DRAWING		RESTRICTED TO		
ANGLES FINISH		SCALE 4:1		SHEET 2 OF 3		
SEE SHEET 1 OF 3		REV C2				

A

LOC	DIST	REVISIONS				
J	-	P	LTR	DESCRIPTION	DATE	DWN
				SEE SHEET 11 OF 3		

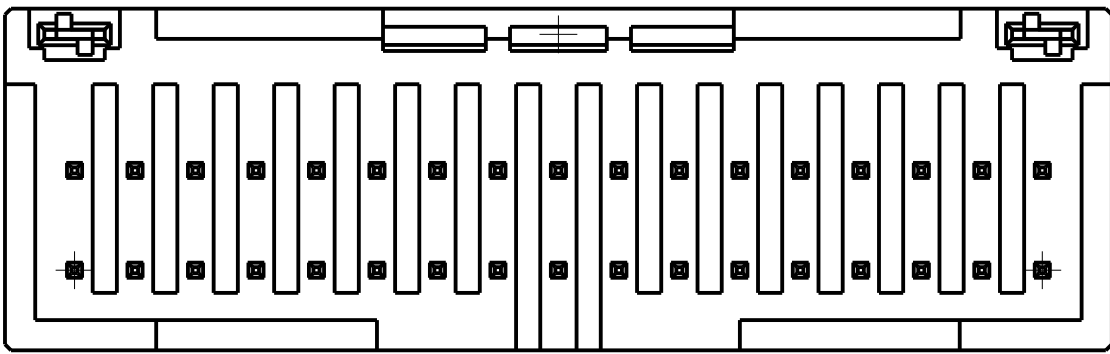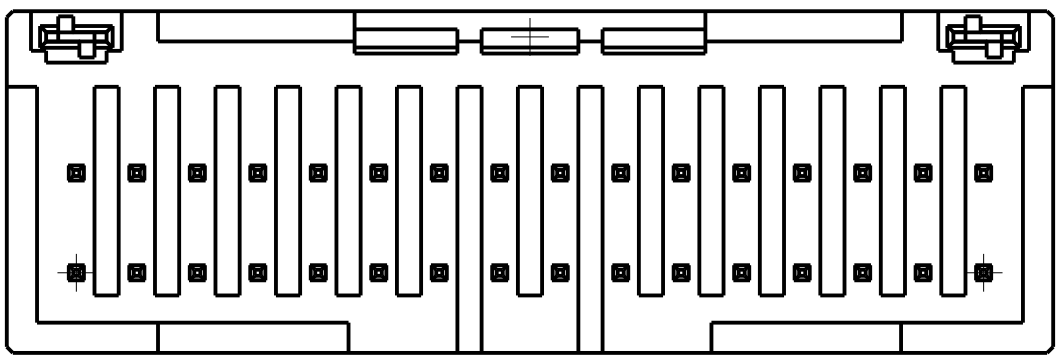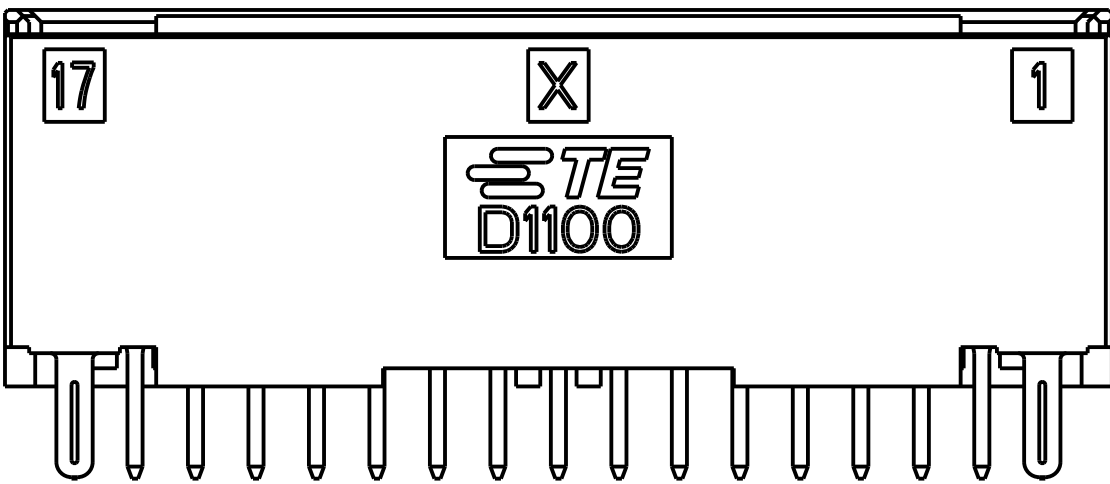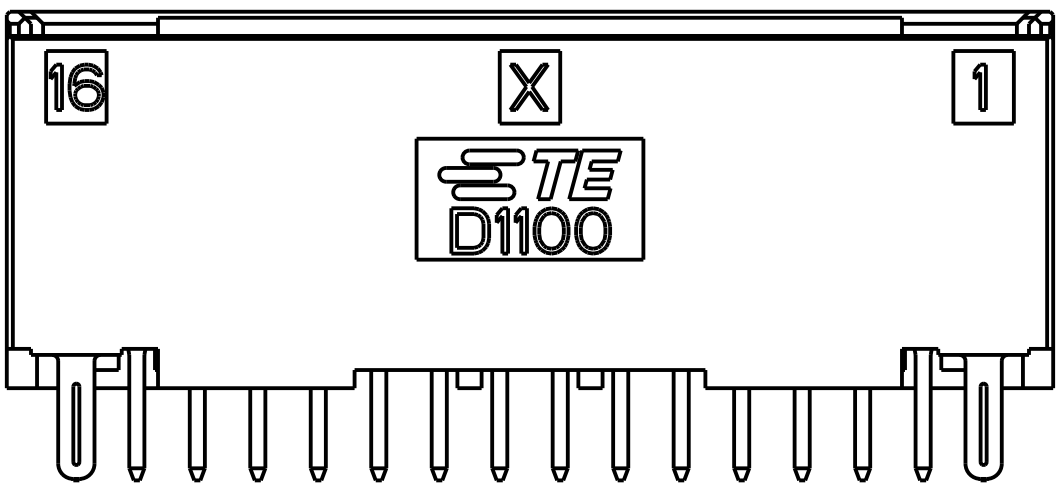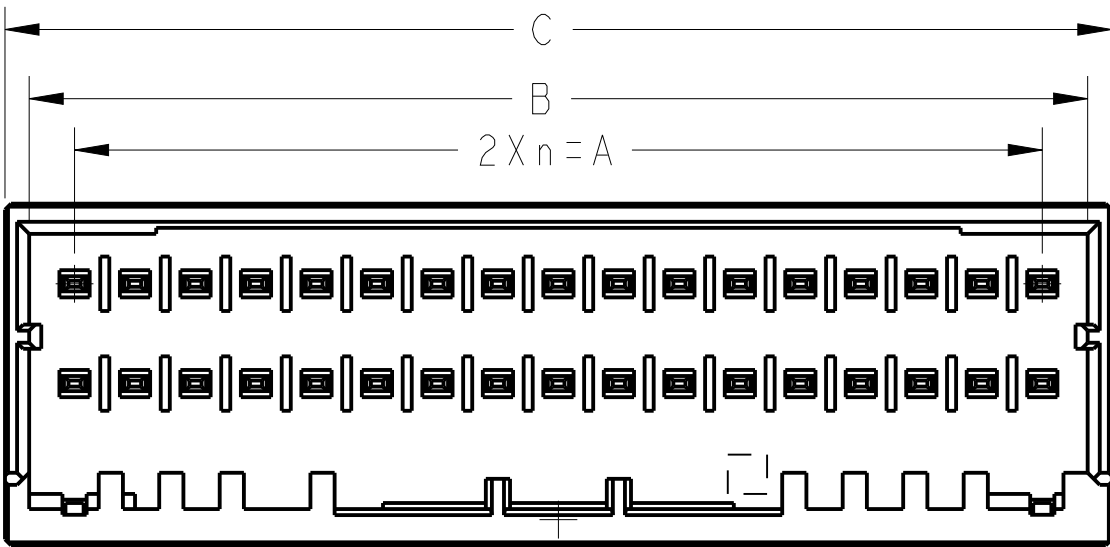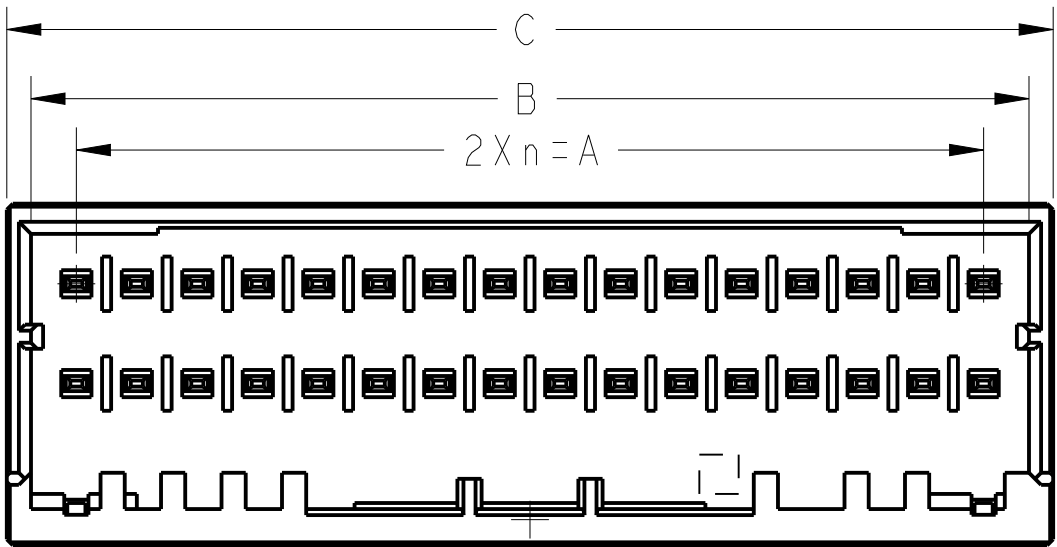

32POS(X-KEY): I-1827872-6

34POS(X-KEY): I-1827872-7

THIS DRAWING IS A CONTROLLED DOCUMENT

DIMENSIONS:

mm

MATERIAL

-

TO CHANGES, UNLESS OTHERWISE SPECIFIED:

1. PLC ±0.5

2. PLC ±0.13

3. PLC ±0.013

4. PLC ±0.0001

ANGLES ±

FINISH

DWN I. KUDO 16MAR2005

CHK D. MITSUGI 23AUG2005

APVD D. MITSUGI 23AUG2005

PRODUCT SPEC 108-78268

APPLICATION SPEC 114-5377

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME DYNAMIC D1100D 2.0mmPITCH HDR ASSY (V-TYPE) 22-40POS

SIZE A200779 CAGE CODE C-1827872

DRAWING NO. 1827872

RESTRICTED TO

SCALE 4:1 SHEET 3 OF 3 REV C2