


LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION		DATE	DWN	APVD
	H2	REVISED PER ECO-11-004917		11MAR11	RK	HMR

- 1 MATERIAL: BODY — COPPER ALLOY
BAND — BeCu
- 2 FINISH: BODY AND BAND — .0002 IN. SILVER
OVER .00004 IN. NICKEL.
3. WIRE BARREL WILL ACCEPT 12-14 AWG WIRE.
4. MATES WITH AMP PART NUMBER 193841-1.
- 5 FINISH: BODY — 30 uIN GOLD MIN. OVER 50 uIN
NICKEL MIN. BAND- GOLD
- 6 FINISH: BODY AND BAND —
AT MINIMUM, HARD GOLD FLASH OVER 40 uINCHES
80-20 Pd/Ni OVER 100 uINCHES NICKEL.
7. ALL DIMENSIONS ARE REFERENCE.

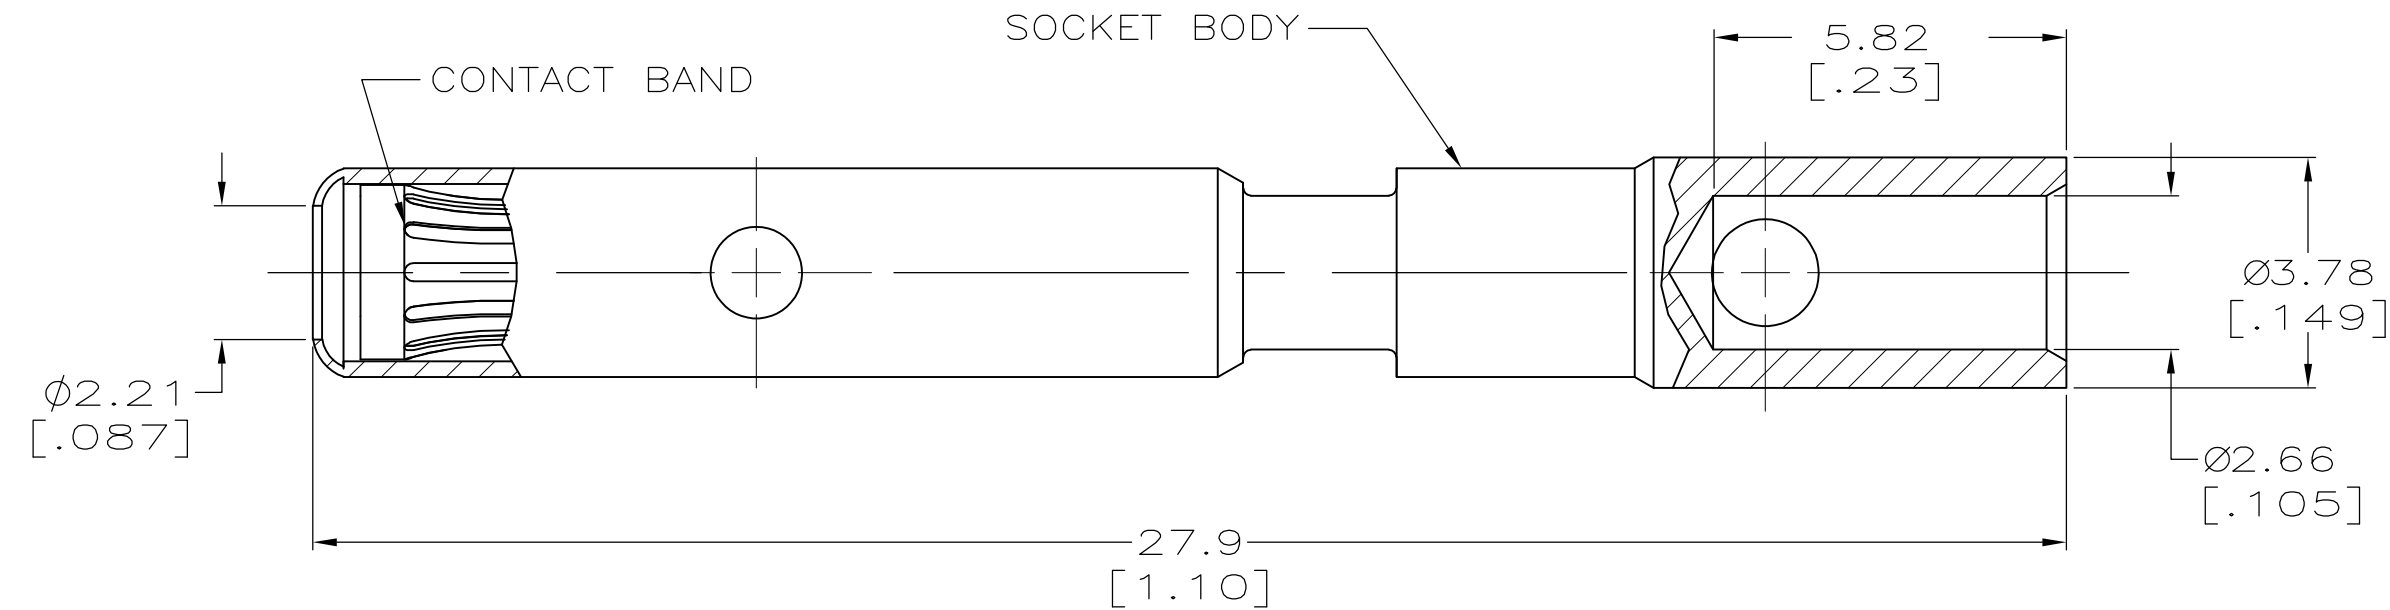

OBSOLETE	6	193842-3
	5	193842-2
	2	193842-1
	FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. M. SVOBODA	03-18-94	TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK	-			
		APVD	-	NAME SOCKET ASSY, 2mm, 12-14 AWG HIGHCURRENT MATE-N-LOK II		
		PRODUCT SPEC	-			
MATERIAL 1		APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO
		WEIGHT	-	A3	00779	C-193842
FINISH -		CUSTOMER DRAWING			SCALE	SHEET
					-	1 OF 1
						REV H2