
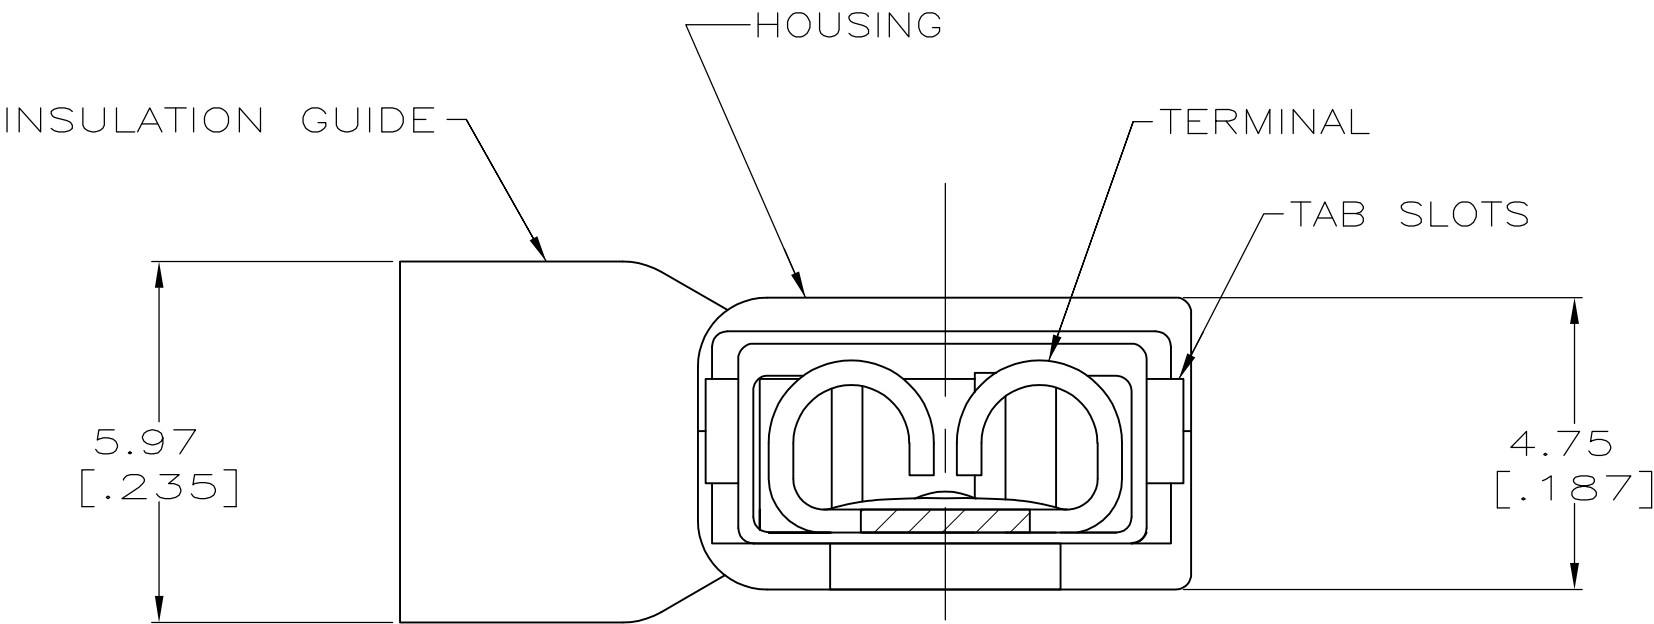
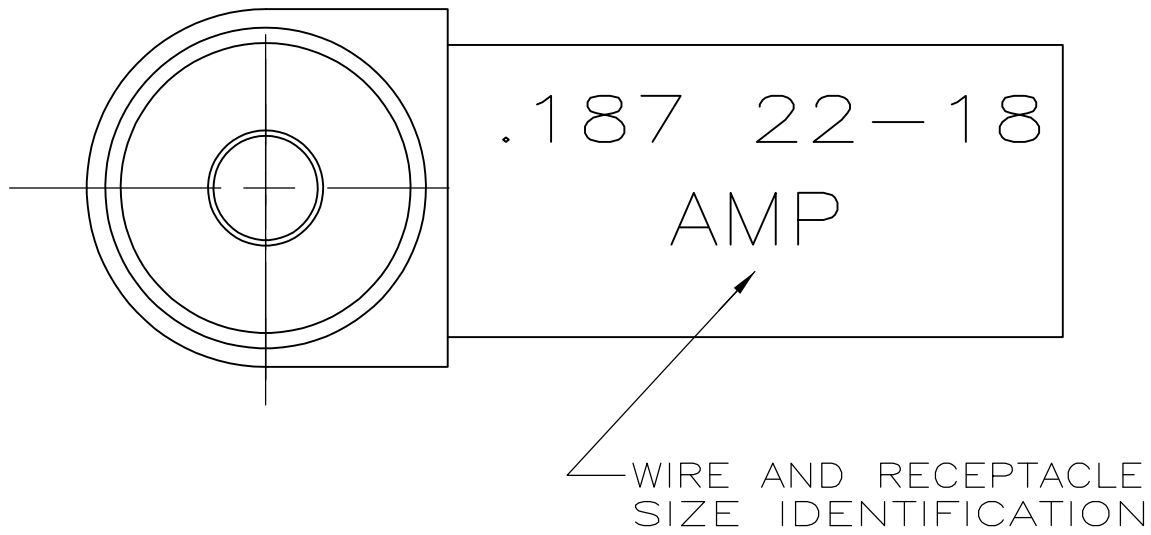


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50		K	REVISED PER ECR-13-004343	30JUL13	KH	KR

- 1 FITS 0.51±0.025 X 4.75 [.020±.001 X .187] TAB
- 2 WIRE SIZE: 0.3–0.9mm² [22–18 AWG], STRANDED ONLY.
STRIP LENGTH 7.14 [.281]
- 3 INSULATION SIZE: 4.19 [.165] MAX DIA.
- 4 SUPPLIED AS LOOSE PIECE

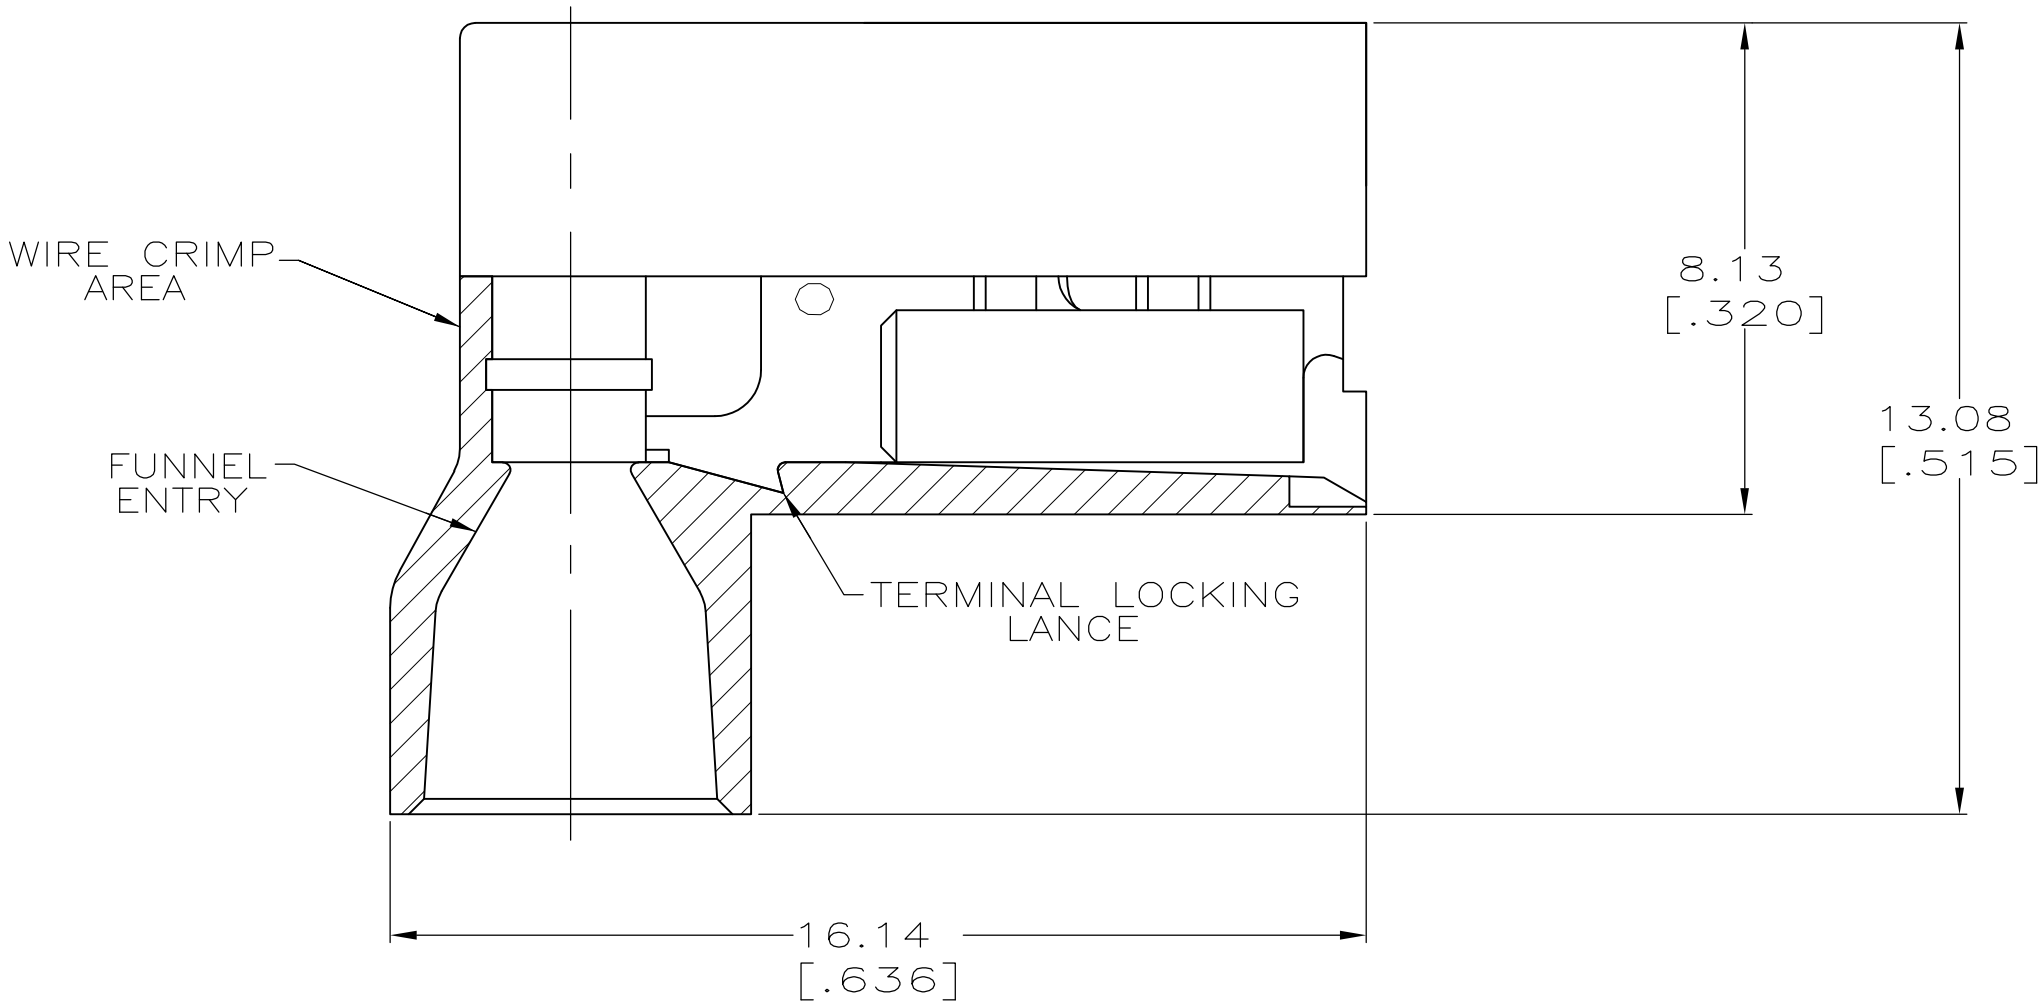

OBSOLETE	TYPE 6/6 NYLON	RED TRANSLUCENT	0.41 [.016] #4H PH BRZ	TIN	2–520335–4
	TYPE 6/6 NYLON	RED TRANSLUCENT	BRASS	TIN	2–520335–2
	MATERIAL	COLOR	MATERIAL	FINISH	PART NO
HOUSING			TERMINAL		
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN P FORTNEY 8/10/90	TE Connectivity	
			CHK MS FEHER 8/23/90		
			APVD D BRATINA 8/23/90		
			PRODUCT SPEC 108–2043		
DIMENSIONS: mm [INCHES]			APPLICATION SPEC 114–2123	NAME RECEPTACLE ASSEMBLY,ULTRA–FAST FLAG, 4.75 [.187] SERIES,LOOSE PIECE	
			WEIGHT –		
MATERIAL SEE TABLE			FINISH SEE TABLE	SIZE A2	CAGE CODE 00779
			CUSTOMER DRAWING	DRAWING NO C=520335	RESTRICTED TO –
			SCALE 8:1	SHEET 1 OF 1	REV K