

NOTES:

1. PULL ON HOUSING TO REMOVE FROM POSTS.
DO NOT CONFINE THE CONDUCTORS OR PULL
ON THE CONDUCTORS DURING REMOVAL ACTION.
2. ACCEPTS CONTACT P/N 87124, 87190, 87191, 87165 AND 867052
4. EXTRACTION SLOT MAY BE PARTIALLY FLASHED
OVER ONE END ONLY.
5. 0.64 (0.025) SQUARE POST SHOWN FOR REFERENCE
ONLY.
6. CAVITY ACCEPTS 0.62 [0.024] SQUARE POST
(TYPICAL).
7. MARKED AS SHOWN IN APPROXIMATE CENTER OF HOUSING.
"PULL HERE" AND "PART NO." WILL APPEAR ON HOUSINGS
6 POSITIONS AND LARGER.
8. TE LOGO MOLDED
AREA RAISED 0.0076 - 0.0178 [0.0003-0.0007] HIGH
AND MAY BE ON EITHER SIDE OF THE PART.


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R BROWN	270C2T006
		CHK M MILLER	270C2T006
		APVD M MILLER	270C2T006
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC ±: 1 PLC ±: 2 PLC ±0.13[0.005] 3 PLC ±: 4 PLC ±: ANGLES ±: FINISH -	
		PRODUCT SPEC	
		108-36028; 108-36028-1	
		APPLICATION SPEC	
		114-25006	
MATERIAL GLASS FILLED THERMO PLASTIC		WEIGHT -	
		CUSTOMER DRAWING	

TE Connectivity


NAME
HOUSING, LOCKING CLIP, 0.64 [0.025] SQR POST 2.54 [0.100] CL, CLOSED END

SIZE	CAGE CODE	DRAWING NO	RESTRICTED T
A2	0079	C-87133	-

CUSTOMER DRAWING	SCALE 3:1	SHEET 1 OF 1	REV T 1
------------------	-----------	--------------	---------

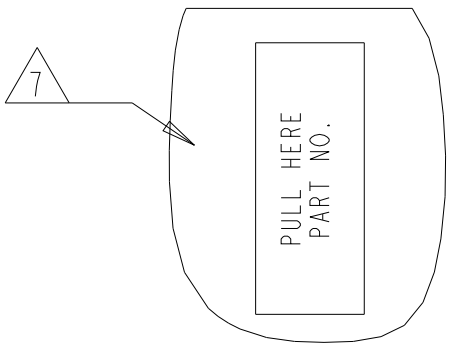

ISOMETRIC VIEW
87133-3 AND 87133-6 AS SHOWN

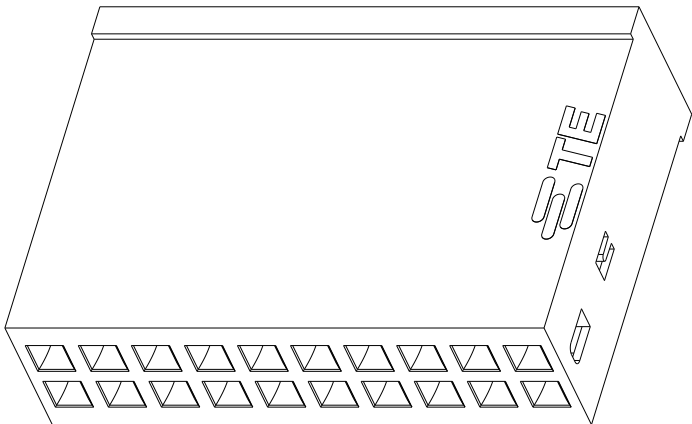

BACK