

DRAWING NO FCD1070-1125-6-C


THIS DRAWING IS A CONTROLLED DOCUMENT



CATALOGUE NUMBER: FCD1070-1125-6 SUITS CONDUCTOR

DEADEND

STRANDING	COND. TYPE	DIAMETER	FITTING LAY
19/2.14	COPPER	10.70	RIGHT HAND

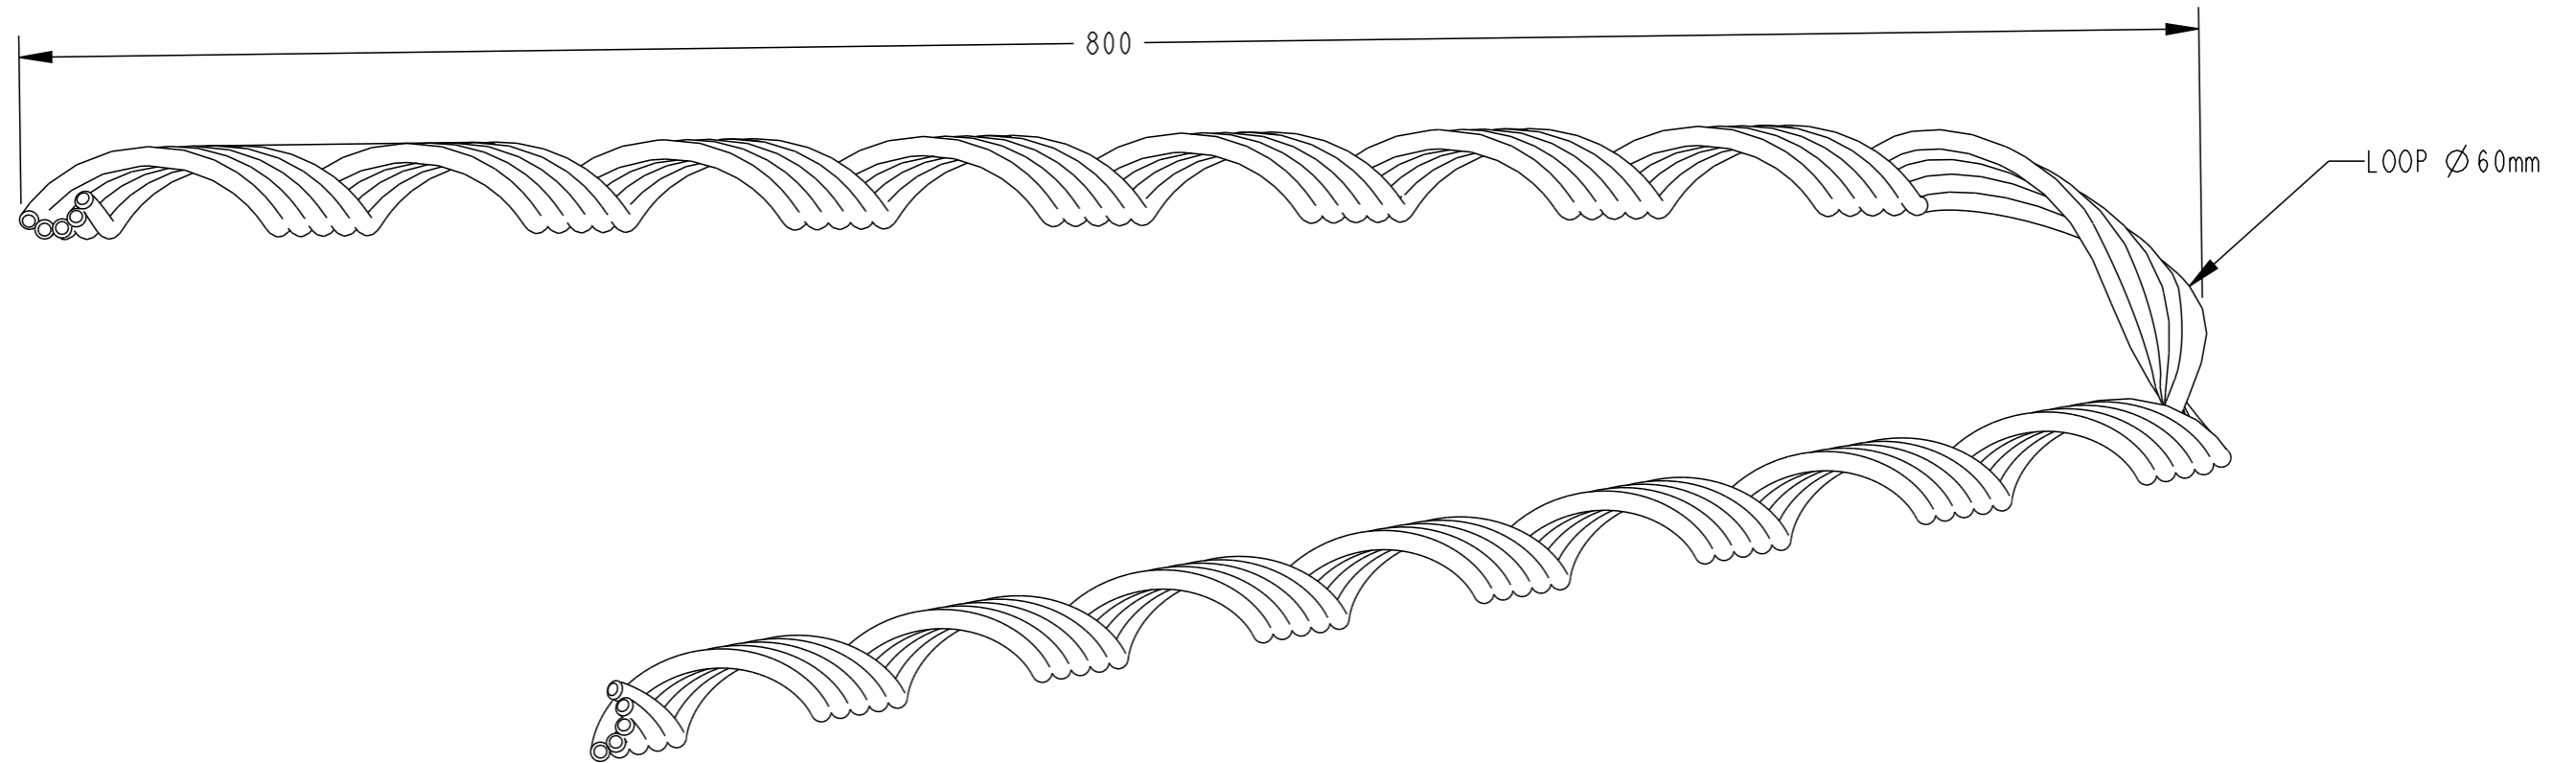

TECHNICAL SPECIFICATIONS:

CATALOGUE NUMBER: FCD1070-1125-6
DESCRIPTION: FULL-TENSION HARD DRAWN COPPER DEADEND
MATERIAL: HARD DRAWN COPPER WIRE
NUMBER OF RODS: 5
ROD DIAMETER: 3.65mm
OVERAL LENGTH: 800mm
END FINISH: CHAMFERED
FITTING LAY DIRECTION: RIGHT HAND
COLOUR CODED: BLACK

PRODUCT LABEL

FCD1070-1125-6
19/2.14 COPPER

WEIGHT: 0.82kg
BATCH NO:
MONTH/YEAR:

BOX LABEL

P/N: FCD1070-1125-6
ID:
DESCRIPTION:
FULL-TENSION COPPER DEADEND
19/2.14 COPPER

RANGE: 10.70 - 11.25
COLOUR-CODE: BLACK
QTY: 20 **WEIGHT:** **BATCH:**

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TE CONNECTIVITY CORPORATION AND ITS WORLDWIDE SUBSIDIARIES AND AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN TE CONNECTIVITY PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM TE CONNECTIVITY CORPORATION, AUSTRALIA.

LOC	DIST	POS	REV	REVISION RECORD	DATE	DWN	APVD	MATERIAL NO	MATL SPEC/STD/DRG NO	PROCESS SPEC HEAT TREAT/PLATING NO	SIZE	PROJECTION	SCALE	DRAWING NO	SHEET	OF	REV
			I	NEW RELEASE	07-02-2014	AG	AT				A3	3RD ANGLE	NTS	FCD1070-1125-6-C	1	1	1

IMPLIED NOTES	IMPLIED TOLERANCES	TCPN	TITLE
BURRS AND SHARP EDGES REMOVED SCREW THREADS ARE TO AS 1275 DO NOT WORK TO DIMS MARKED REF SURFACE FINISH 6.3 U.N.O. DIMS ARE IN mm. DO NOT SCALE	HOLE DIA AND LOCATIONS: ±0.5mm. DIMENSIONS UP TO 30mm: ±1.5mm. DIMENSIONS OVER 30mm: ±5% UP TO A MAX OF±5mm. ANGULAR DIMENSIONS:±5°	- PART Alias UTX/DUL FCD1070-1125-6 Cat No FCD1070-1125-6	FULL-TENSION HARD DRAWN COPPER DEADEND (FCD) FITTING COND RANGE Ø10.70 - Ø11.25 LOOP 60

DRAWN	DATE	CHECKED	APPROVED	TE Connectivity
AG	07-02-2014	RN	AT	2/3 Corella Close Berkeley Vale NSW 2261 Australia