


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	26SEP2022	JG	NV
	B	ECR-23-*	19JUN2023	AN	VR

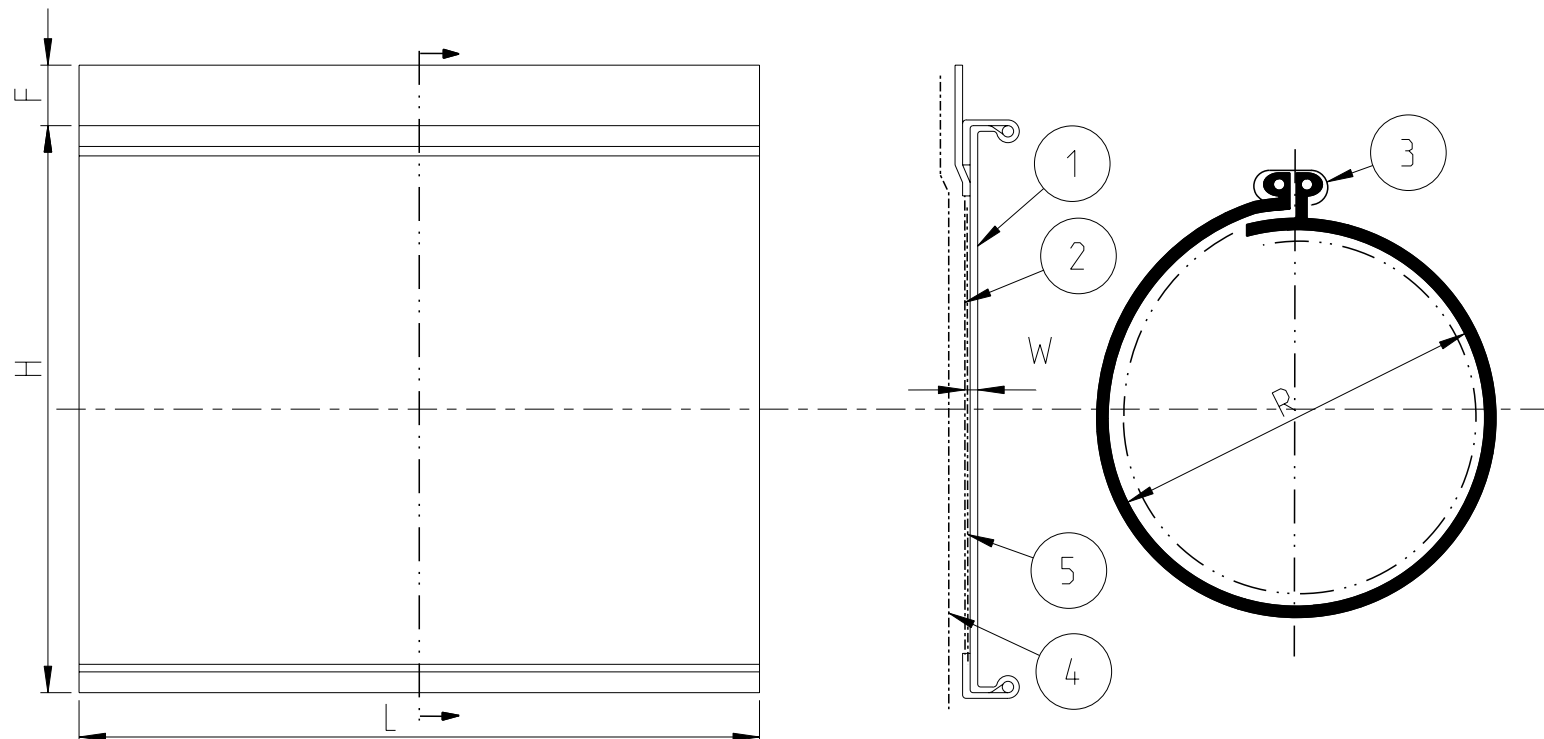

NOTES

- DIMENSIONS IN mm. a = AS SUPPLIED, b = AFTER FREE RECOVERY
- STANDARD LENGTHS L : 1000 mm, 1500 mm. OTHER CUT LENGTHS AVAILABLE UNDER REQUEST.
- MAXIMUM LONGITUDINAL CHANGE AFTER FREE RECOVERY: -5%
- STANDARD CUT LENGTH TOLERANCES:
 ± 5 mm (L ≤ 500)
 ± 10 mm (L < 1000)
 ± 15 mm (L < 1500)
 ± 1% (L > 1500)


5. STANDARD PRINTING: PRODUCT SIZE
 TE RAYCHEM CFMSM + PRODUCT SIZE + BATCH NUMBER

ITEM	DESCRIPTION	MATERIAL
1	HEATSHRINK SLEEVE	CROSSLINKED POLYOLEFINE BASED
2	HOTMELT ADHESIVE	POLYAMIDE BASED
3	CLOSURE SYSTEM	STAINLESS STEEL
4	REMOVABLE PROTECTIVE FOIL	PE
5	WRAPPING FOIL	ALUMINIUM

PRODUCT SIZE	APPLICATION RANGE (mm)		Ha MIN	Fa MIN	W	
	R				a MIN	b MIN
	MIN	MAX				
45/8	8	45	180	20	1.5	4.5
55/12	12	55	215	20	1.5	4.5
84/15	15	84	305	20	1.5	4.5
100/25	25	100	355	20	1.5	4.5
125/30	30	125	430	20	1.5	4.5
146/34	34	146	480	20	1.5	4.5
165/42	42	165	560	20	1.5	4.5
205/50	50	205	700	20	1.5	4.5



PRODUCT SPEC - 108-160628

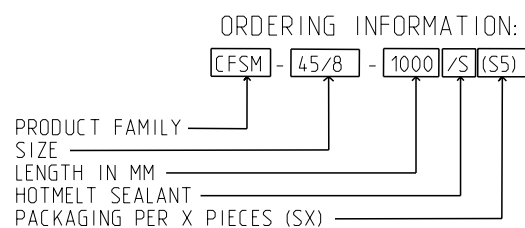

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±0.5
2 PLC	±0.13
3 PLC	±0.013
4 PLC	±0.0001
ANGLES	±

MATERIAL: - FINISH: -

TE Connectivity

NAME: CFMSM REINFORCED WRAPAROUND SLEEVES

SIZE: A3 CAGE CODE: 00779 DRAWING NO: C-LV_CA_HS_CFSM-S RESTRICTED TO: -

SCALE: 5:1 SHEET: 1 OF 1 REV: B

Printed on 18 Aug 2023 13:44 (India Standard Time) from TE484261