


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	26SEP2022	JG	NV
	B	ECR-23-*	19JUN2023	AN	VR

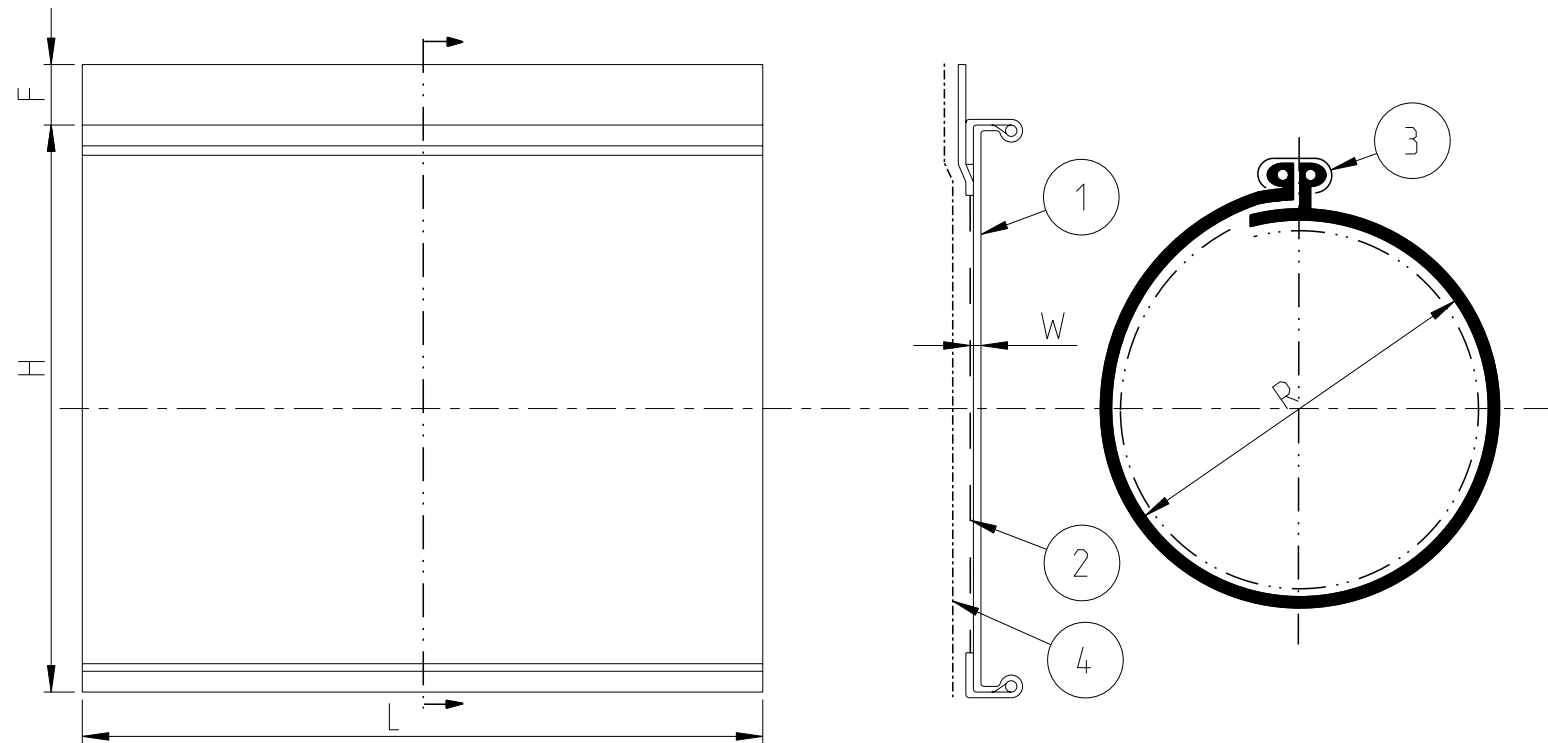

NOTES

- DIMENSIONS IN mm. a = AS SUPPLIED, b = AFTER FREE RECOVERY
- STANDARD LENGTHS L : 500 mm, 750 mm, 1000 mm, 1500 mm. OTHER CUT LENGTHS AVAILABLE UNDER REQUEST.
- MAXIMUM LONGITUDINAL CHANGE AFTER FREE RECOVERY: -5%
- STANDARD CUT LENGTH TOLERANCES:  
 ± 5 mm (L ≤ 500)  
 ± 10 mm (L < 1000)  
 ± 15 mm (L < 1500)  
 ± 1% (L > 1500)

- B** 5. STANDARD PRINTING:  
TE RAYCHEM CNSM + PRODUCT SIZE + BATCH NUMBER

ITEM	DESCRIPTION	MATERIAL
1	HEATSHRINK SLEEVE	CROSSLINKED POLYOLEFINE BASED
2	HOTMELT ADHESIVE	POLYAMIDE BASED
3	CLOSURE SYSTEM	STAINLESS STEEL
4	REMOVABLE PROTECTIVE FOIL	PE

PRODUCT SIZE	APPLICATION RANGE (mm) R		Ha MIN	Fa MIN	W	
	MIN	MAX			a MIN	b MIN <b>B</b>
45/8	8	45	180	20	1.5	4.5
55/12	12	55	215	20	1.5	4.5
84/15	15	84	305	20	1.5	4.5
100/25	25	100	355	20	1.5	4.5
125/30	30	125	430	20	1.5	4.5
146/34	34	146	480	20	1.5	4.5
165/42	42	165	560	20	1.5	4.5
205/50	50	205	700	20	1.5	4.5



PRODUCT SPEC - 108-160628

ORDERING INFORMATION:  
**CNSM** - **45/8** - **1000** / **S** (**S5**)

PRODUCT FAMILY  
 SIZE  
 LENGTH IN MM  
 HOTMELT SEALANT  
 PACKAGING PER X PIECES (SX)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±
MATERIAL	FINISH
-	-

DWN	J GODWIN	08NOV2022
CHK	N VINEEL RAJAN	08NOV2022
APVD	N VINEEL RAJAN	08NOV2022
PRODUCT SPEC	-	-
APPLICATION SPEC	-	-
WEIGHT	-	-
CUSTOMER DRAWING		

TE Connectivity		NAME	
<b>STE</b>		CNSM REINFORCED WRAPAROUND SLEEVES	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	©-LV_CA_HS_CNSM-S	-
SCALE		SHEET	REV
5:1		1 OF 1	B

Printed on 18 Aug 2023 13:44 (India Standard Time) from TE484261